## INTEGRATED CIRCUITS

# DATA SHEET

74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

**Transceivers** 

Product specification IC05 Data Handbook





## **Transceivers**

## 74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

74ALS620A/74ALS620A-1 Octal bus transceiver, inverting (3-State) 74ALS623A/74ALS623A-1 Octal bus transceiver, non-inverting (3-State)

#### **FEATURES**

- Octal bidirectional bus interface
- 3-State buffer outputs sink 24mA and source 15mA
- The -1 version sinks 48mA I<sub>OL</sub> within the +5% V<sub>CC</sub> range

TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74ALS620A/620A-1	4.0ns	33mA
74ALS623A/623A-1	4.0ns	38mA

#### ORDERING INFORMATION

	ORDER CODE	
DESCRIPTION	COMMERCIAL RANGE $V_{CC}$ = 5V ±10%, $T_{amb}$ = 0°C to +70°C	DRAWING NUMBER
20-pin plastic DIP	74ALS620AN, 74ALS620A-1N 74ALS623AN, 74ALS623A-1N	SOT146-1
20-pin plastic SOL	74ALS620AD, 74ALS620A-1D 74ALS623AD, 74ALS623A-1D	SOT163-1

#### **DESCRIPTION**

The 74ALS620A and 74ALS623A are octal transceiver featuring 3-State bus compatible outputs in both transmit and receive directions. The 74ALS620A is an inverting version of the 74ALS623A. The outputs are capable of sinking 24mA and sourcing up to 15mA, providing very good capacitive drive characteristics.

The outputs for the 74ALS620A-1 and 74ALS623A are capable of sinking up to 48mA when within the  $\pm 5\%$  V<sub>CC</sub> range.

These octal bus transceivers are designed for asynchronous two-way communication between data buses. The control function implementation allows for maximum flexibility in timing.


These devices allow data transmission from the A bus to the B bus or from B bus to A bus, depending on the logic levels at the enable inputs ( $\overline{OEBA}$  and OEAB). The enable inputs can be used to disable the device so that the buses are effectively isolated. The dual-enable configuration gives the 74ALS620A and 74ALS623A the capability to store data by the simultaneous enabling of  $\overline{OEBA}$  and OEAB. Each output reinforces its input in this transceiver configuration. Thus when both control inputs are enabled and all other data sources to the two sets of the bus lines are at high impedance, both sets of the bus lines (16 in all) will remain at their last states.

#### INPUT AND OUTPUT LOADING AND FAN-OUT TABLE


PINS	DESCRIPTION	74ALS (U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
A0 – A7, B0 – B7	Data inputs	1.0/1.0	20μA/0.1mA
OEBA, OEAB	Output Enable inputs	1.0/1.0	20μA/0.1mA
A0 – A7, B0 – B7	Data outputs	750/240	15mA/24mA
A0 – A7, B0 – B7	Data outputs (-1 version)	750/480	15mA/48mA

NOTE: One (1.0) ALS unit load is defined as:  $20\mu A$  in the High state and 0.1 mA in the Low state.

#### PIN CONFIGURATION - 74ALS620A/74ALS620A-1

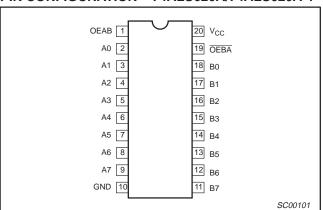


#### PIN CONFIGURATION - 74ALS623A/74ALS623A-1

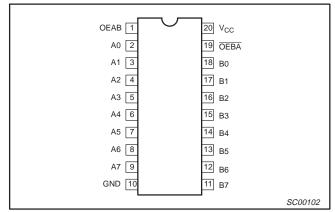


## **Transceivers**

74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1


#### LOGIC SYMBOL - 74ALS620A/74ALS620A-1

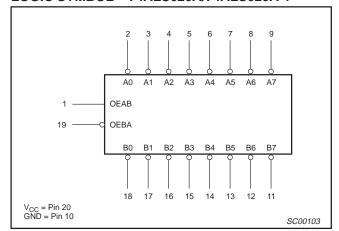


#### LOGIC SYMBOL - 74ALS623A/74ALS623A-1

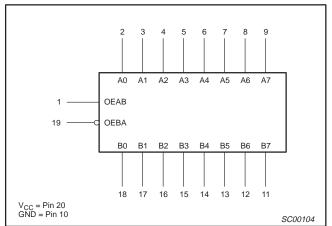

#### IEC/IEEE SYMBOL - 74ALS620A/74ALS620A-1

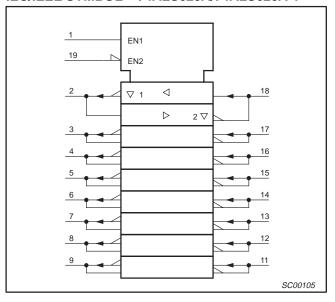


## IEC/IEEE SYMBOL - 74ALS623A/74ALS623A-1

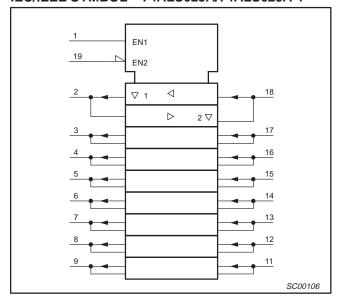


## **Transceivers**

74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

#### LOGIC DIAGRAM - 74ALS620A/74ALS620A-1

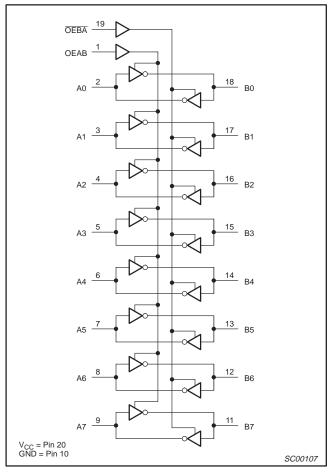

#### LOGIC DIAGRAM - 74ALS623A/74ALS623A-1

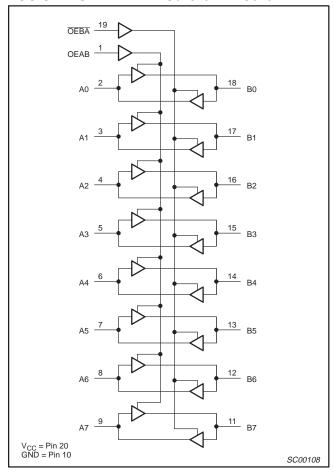

#### **FUNCTION TABLE**

INP	JTS	OPERATIN	IG MODES
OEBA	OEAB	74ALS620A	74ALS623A
L	L	B̄ data to A Bus	B data to A Bus
L	Н	Ā data to B Bus	A data to B Bus
Н	L	Z	Z
L	Н	B̄ data to A Bus	B data to A Bus
L	Н	Ā data to B Bus	A data to B Bus

H = High voltage level
L = Low voltage level
X = Don't care
Z = High impedance "off" state

## **Transceivers**

74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

#### **ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limit set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free air temperature range.)

SYMBOL	PARAMETER	RATING	UNIT					
V <sub>CC</sub>	Supply voltage	Supply voltage						
V <sub>IN</sub>	Input voltage	Input voltage						
I <sub>IN</sub>	Input current	−30 to +5	mA					
V <sub>OUT</sub>	Voltage applied to output in High output state	−0.5 to V <sub>CC</sub>	V					
	Current applied to output in Law output state	All versions	48	mA				
Гоит	Current applied to output in Low output state	96	mA					
T <sub>amb</sub>	Operating free-air temperature range	0 to +70	°C					
T <sub>stg</sub>	Storage temperature range		-65 to +150	°C				

## **RECOMMENDED OPERATING CONDITIONS**

SYMBOL	PARAMETER		UNIT			
STWIBUL			MIN	NOM	MAX	UNII
V <sub>CC</sub>	Supply voltage		4.5	5.0	5.5	V
V <sub>IH</sub>	High-level input voltage	2.0			V	
V <sub>IL</sub>	Low-level input voltage			0.8	V	
I <sub>IK</sub>	Input clamp current				-18	mA
I <sub>OH</sub>	High-level output current				-15	mA
	Low lovel output outrest	All versions			24	mA
loL	Low-level output current			48 <sup>1</sup>	mA	
T <sub>amb</sub>	Operating free-air temperature range	0		+70	°C	

#### NOTE:

1991 Feb 08 5

<sup>1.</sup> The 48mA limit applies only under the condition of  $V_{CC}$  = 5.0V  $\pm 5\%$ .

## **Transceivers**

74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

#### DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

CVMPO	MBOL PARAMETER			TEST COMPLETE	ONC1	LIMITS			UNIT
STWBUL	PARA	WEIER		TEST CONDITION	MIN	TYP <sup>2</sup>	MAX	UNII	
				$V_{CC} = \pm 10\%, V_{IL} = MAX,$	$I_{OH} = -0.4$ mA	V <sub>CC</sub> – 2			V
$V_{OH}$	High-level output voltage			V <sub>IH</sub> = MIN	$I_{OH} = -3mA$	2.4	3.2		V
<b>U</b>				$V_{CC} = MIN, V_{IL} = MAX, V_{IH} = MIN$	I <sub>OH</sub> = -15mA	2.0			V
		All versions  —1 versions  ge  OEBA or OEAB  A or B ports  current <sup>3</sup> urrent <sup>3</sup> T4ALS620A  74ALS620A-1  Iccl		V <sub>CC</sub> = MIN, V <sub>IL</sub> = MAX,	$V_{CC} = MIN, V_{IL} = MAX,$ $I_{OL} = 12mA$		0.25	0.40	V
$V_{OL}$	Low-level output	All version	15	V <sub>IH</sub> = MIN	I <sub>OL</sub> = 24mA		0.35	0.50	V
	voltage	-1 versions		$V_{CC} = 4.75V$ , $V_{IL} = MAX$ , $V_{IH} = MIN$	I <sub>OL</sub> = 48mA		0.35	0.50	V
$V_{IK}$	Input clamp voltage			$V_{CC} = MIN, I_I = I_{IK}$		-0.73	-1.5	V	
	Input current at maximum input	OEBA or OEAB		$V_{CC} = MAX, V_I = 7.0V$				0.1	mA
II	voltage	A or B por	ts	V <sub>CC</sub> = MAX, V <sub>I</sub> = 5.5V				0.1	mA
I <sub>IH</sub>	High-level input curren	t <sup>3</sup>		$V_{CC} = MAX, V_I = 2.7V$			20	μΑ	
I <sub>IL</sub>	Low-level input current	.3		$V_{CC} = MAX, V_I = 0.4V$				-0.1	mA
I <sub>O</sub>	Output current <sup>4</sup>			$V_{CC} = MAX, V_O = 2.25V$		-30		-112	mA
			I <sub>CCH</sub>				24	34	mA
			I <sub>CCL</sub>	V <sub>CC</sub> = MAX			42	49	mA
l	Supply current (total)		I <sub>CCZ</sub>				45	52	mA
I <sub>CC</sub>	Supply current (total)		I <sub>CCH</sub>				24	43	mA
		74ALS623A 74ALS623A-1	I <sub>CCL</sub>	V <sub>CC</sub> = MAX			41	50	mA
			I <sub>CCZ</sub>	]			46	55	mA

- For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
   All typical values are at V<sub>CC</sub> = 5V, T<sub>amb</sub> = 25°C.
   For I/O ports, the parameter I<sub>IH</sub> and I<sub>IL</sub> include the off-state current.
   The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I<sub>OS</sub>.

## **Transceivers**

74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

## AC ELECTRICAL CHARACTERISTICS FOR 74ALS620A/74ALS620A-1

			LIM		
SYMBOL	PARAMETER	TEST CONDITION	T <sub>amb</sub> = 0°0 V <sub>CC</sub> = +5. C <sub>L</sub> = 50pF,	UNIT	
			MIN	MAX	1
t <sub>PLH</sub>	Propagation delay An to Bn, Bn to An	Waveform 1	2.0 2.0	10.0 10.0	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output enable time OEBA to An	Waveform 3 Waveform 4	2.0 3.0	17.0 25.0	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output disable time OEBA to An	Waveform 3 Waveform 4	2.0 2.0	12.0 18.0	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output enable time OEAB to Bn	Waveform 3 Waveform 4	2.0 3.0	18.0 25.0	ns
t <sub>PHZ</sub>	Output disable time OEAB to Bn	Waveform 3 Waveform 4	2.0 3.0	12.0 18.0	ns

## AC ELECTRICAL CHARACTERISTICS FOR 74ALS623A/74ALS623A-1

			LIM		
SYMBOL	PARAMETER	TEST CONDITION	T <sub>amb</sub> = 0°0 V <sub>CC</sub> = +5. C <sub>L</sub> = 50pF,	UNIT	
			MIN	MAX	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay An to Bn, Bn to An	Waveform 2	2.0 2.0	13.0 11.0	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output enable time OEBA to An	Waveform 3 Waveform 4	2.0 3.0	22.0 22.0	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output disable time OEBA to An	Waveform 3 Waveform 4	2.0 2.0	16.0 19.0	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output enable time OEAB to Bn	Waveform 3 Waveform 4	2.0 3.0	22.0 22.0	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output disable time OEAB to Bn	Waveform 3 Waveform 4	2.0 2.0	16.0 19.0	ns


1991 Feb 08 7

## **Transceivers**


74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

#### **AC WAVEFORMS**


For all waveforms,  $V_M = 1.3V$ .

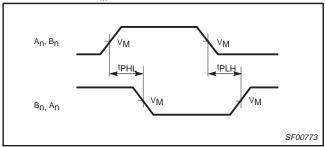


Waveform 1. Propagation Delay for Inverting Outputs

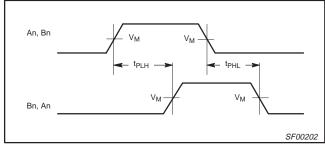

Waveform 2. Propagation Delay for Non-inverting Outputs

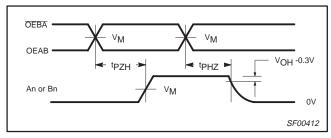


Waveform 3. 3-State Output Enable Time to High Level and Disable Time from High Level

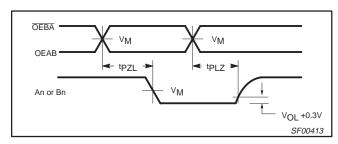

Waveform 4. 3-State Output Enable Time to Low Level and Disable Time from Low Level

#### **TEST CIRCUIT AND WAVEFORMS**

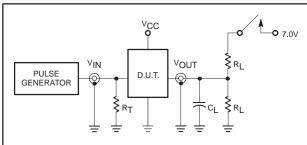

**Test Circuit for 3-State Outputs** 

#### **SWITCH POSITION**

TEST	SWITCH
t <sub>PLZ</sub> , t <sub>PZL</sub>	closed
All other	open


#### **DEFINITIONS:**

R<sub>L</sub> = Load resistor;

see AC electrical characteristics for value.

C<sub>L</sub> = Load capacitance includes jig and probe capacitance; see AC electrical characteristics for value.

 $R_T = \mbox{Termination resistance should be equal to $Z_{OUT}$ of pulse generators.}$ 

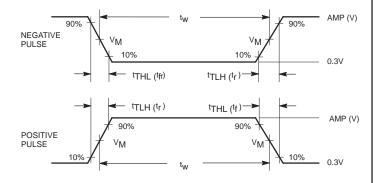

#### Input Pulse Definition

Family		INPUT PULSE REQUIREMENTS										
	rammy	Amplitude	$V_{\text{M}}$	Rep.Rate	t <sub>w</sub>	t <sub>TLH</sub>	t <sub>THL</sub>					
	74ALS	4ALS 3.5V		1MHz	500ns	2.0ns	2.0ns					


SC00072

## **Transceivers**

# 74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

## DIP20: plastic dual in-line package; 20 leads (300 mil)

SOT146-1

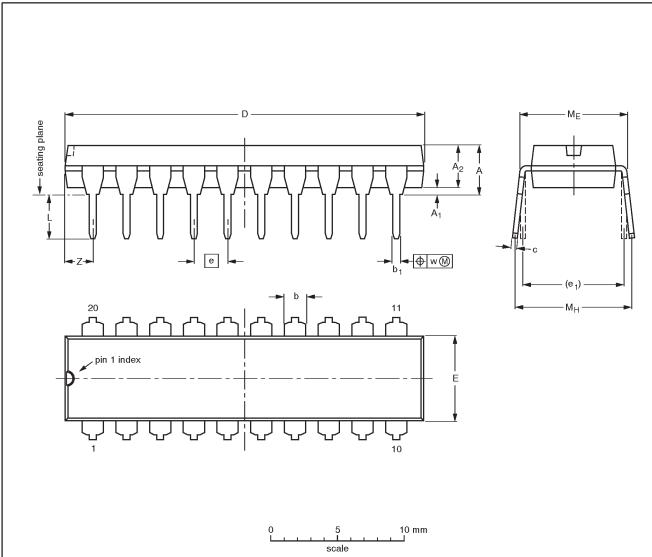

#### DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A <sub>1</sub> min.	A <sub>2</sub> max.	b	b <sub>1</sub>	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	e <sub>1</sub>	L	ME	M <sub>H</sub>	w	Z <sup>(1)</sup> max.
mm	4.2	0.51	3.2	1.73 1.30	0.53 0.38	0.36 0.23	26.92 26.54	6.40 6.22	2.54	7.62	3.60 3.05	8.25 7.80	10.0 8.3	0.254	2.0
inches	0.17	0.020	0.13	0.068 0.051	0.021 0.015	0.014 0.009	1.060 1.045	0.25 0.24	0.10	0.30	0.14 0.12	0.32 0.31	0.39 0.33	0.01	0.078

#### Note


1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE	
SOT146-1			SC603			<del>92-11-17</del> 95-05-24	

1991 Feb 08 9

## SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1

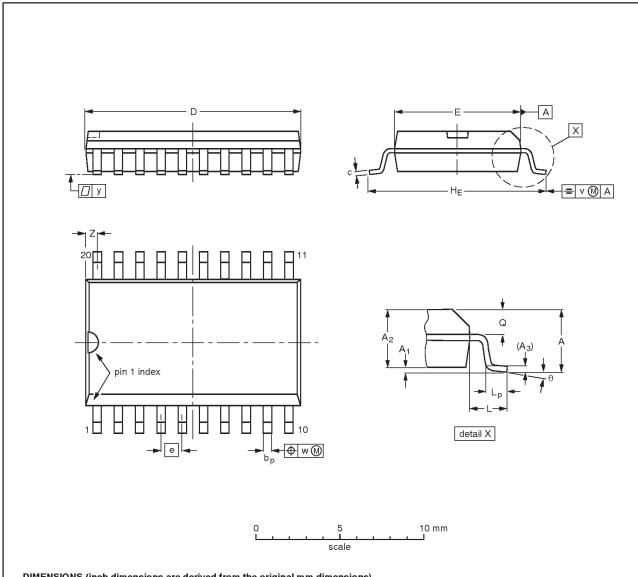

#### DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	Α1	A <sub>2</sub>	A <sub>3</sub>	bр	С	D (1)	E <sup>(1)</sup>	е	HE	L	Lp	Q	v	w	у	z <sup>(1)</sup>	θ
mm	2.65	0.30 0.10	2.45 2.25	0.25	0.49 0.36	0.32 0.23	13.0 12.6	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8°
inches	0.10	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.51 0.49	0.30 0.29	0.050	0.42 0.39	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	0°

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE	
SOT163-1	075E04	MS-013AC				<del>-92-11-17</del> 95-01-24	

## **Transceivers**

74ALS620A/74ALS620A-1 74ALS623A/74ALS623A-1

DEFINITIONS						
Data Sheet Identification	Product Status	Definition				
Objective Specification	Formative or in Design	This data sheet contains the design target or goal specifications for product development. Specifications may change in any manner without notice.				
Preliminary Specification	Preproduction Product	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.				
Product Specification	Full Production	This data sheet contains Final Specifications. Philips Semiconductors reserves the right to make changes at any time without notice, in order to improve design and supply the best possible product.				

Philips Semiconductors and Philips Electronics North America Corporation reserve the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified. Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### LIFE SUPPORT APPLICATIONS

Philips Semiconductors and Philips Electronics North America Corporation Products are not designed for use in life support appliances, devices, or systems where malfunction of a Philips Semiconductors and Philips Electronics North America Corporation Product can reasonably be expected to result in a personal injury. Philips Semiconductors and Philips Electronics North America Corporation customers using or selling Philips Semiconductors and Philips Electronics North America Corporation Products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors and Philips Electronics North America Corporation for any damages resulting from such improper use or sale.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 1997 All rights reserved. Printed in U.S.A.

Let's make things better.





