


# **Voltage Transducer CV 3-1500**

For the electronic measurement of voltages: DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high voltage) and the secondary circuit (electronic circuit).





## $V_{PN} = 1000 \text{ V}$



#### **Electrical data**

$\mathbf{V}_{PN}$	Primary nominal r.m.s. voltage	1000	٧
V <sub>P</sub>	Primary voltage, measuring range	0 ± 1500	V
<b>V</b> s	Secondary analog voltage @ V <sub>P max</sub>	10	V
K <sub>N</sub>	Conversion ratio	1500 V/10 V	
R,	Load resistance	≥ 1	kΩ
C,	Capacitive loading	≤ 5	nF
<b>V</b> c	Supply voltage (± 5 %)	± 15	V
I <sub>c</sub>	Current consumption	$32 + V_{s}/R_{L}$	mΑ
V <sub>d</sub>	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	6	kV
V <sub>e</sub>	R.m.s. voltage for partial discharge extinction @ 10 pC	2	kV

## **Accuracy - Dynamic performance data**

			Тур	Max	
$\mathbf{X}_{_{\mathrm{G}}}$	Overall accuracy @ V <sub>P max</sub>	$T_A = 25^{\circ}C$		± 0.2 ± 0.6 ± 5.0 ± 13.0	%
		- 40°C + 85°C		± 0.6	%
$V_{\circ}$	Offset voltage @ $\mathbf{V}_{P} = 0$	$T_A = 25^{\circ}C$		± 5.0	m۷
		- 40°C + 85°C		± 13.0	m۷
t,	Response time $^{1)}$ @ 90 % of $\mathbf{V}_{P \text{ max}}$				μs
dv/dt	dv/dt accurately followed		900		V/µs
f	Frequency bandwidth (- 1 dB) @ 33 % of $\mathbf{V}_{_{\mathrm{PN}}}$		DC 8	800	kHz
t <sub>r</sub> dv/dt f	•		0.4 900		μs V/μs

#### General data

Ambient energting temperature	40 . 95	°C
Ambient operating temperature	- 40 + 65	C
Ambient storage temperature	- 45 + 90	°C
Total primary power loss	2.8	W
Primary resistance	360	$k\Omega$
Mass	560	g
Standards 2)	EN 50155	
	Total primary power loss Primary resistance Mass	Ambient storage temperature - 45 + 90  Total primary power loss 2.8  Primary resistance 360  Mass 560

#### **Features**

- Closed loop (compensated) voltage transducer
- Insulated plastic case recognized according to UL 94-V0
- · Patent pending.

#### **Advantages**

- Excellent accuracy
- Very good linearity
- Low thermal drift
- Low response time
- High bandwidth
- High immunity to external interference
- Low disturbance in common mode.

#### **Applications**

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications
- Railway overhead line voltage measurement.


Notes: 1) With a dv/dt of 900 V/µs

030129/7

<sup>2)</sup> A list of corresponding tests is available



## **Dimensions CV 3-1500** (in mm. 1 mm = 0.0394 inch)

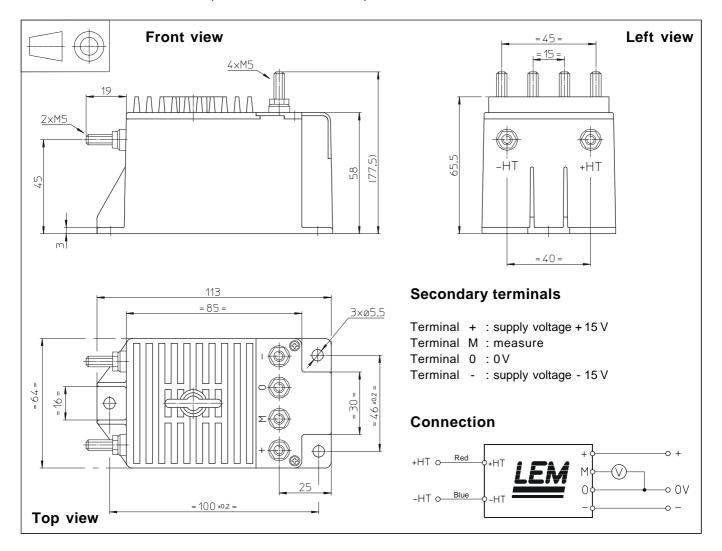

#### **Mechanical characteristics**

- General tolerance
- Transducer fastening

Fastening torque max

- · Connection of primary
- Connection of secondary
- Fastening torque max
- ± 0.3 mm
- 3 holes  $\varnothing$  5.5 mm
- 3 M5 steel screws
- 4 Nm or 2.95 Lb. Ft.
- M5 threaded studs
- M5 threaded studs
- 2.2 Nm or 1.62 Lb. -Ft.

### **Remarks**

- $\bullet$   $\mathbf{V}_{_{\mathrm{S}}}$  is positive when  $\mathbf{V}_{_{\mathrm{P}}}$  is applied on terminal +HT.
- CEM tested with a shielded secondary cable. Shield connected to 0 V at both ends, or disconnected.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.