


- Quartz SAW Frequency Stability
- Fundamental Fixed Frequency
- Very Low Jitter and Power Consumption
- Rugged, Miniature, Surface-Mount Case
- Low-Voltage Power Supply (3.3 VDC)

This digital clock is designed for use with high-speed CPUs and digitizers. Fundamental-mode oscillation is made possible by surface-acoustic-wave (SAW) technology. The design results in low jitter, compact size, and low power consumption. Differential outputs provide a sine wave that is capable of driving $50~\Omega$ loads.

SC3027B

380.0 MHz Differential Sine-Wave Clock



Rating	Value	Units
Power Supply Voltage (V _{CC} at Terminal 1)	0 to +4.0	VDC
Input Voltage (ENABLE at Terminal 8)	0 to +4.0	VDC
Case Temperature (Powered or Storage)	-40 to +85	°C

Electrical Characteristics


(Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Output Frequency	tput Frequency Absolute Frequency f _O	1, 2	379.924		380.076	MHz	
	Tolerance from 380.000 MHz	Δf_{O}	1, 2			±200	ppm
Q and Q Output	Voltage into 50Ω (VSWR ≤ 1.2)	Vo	1, 3	0.60		1.1	V _{P-P}
	Operating Load VSWR					2:1	
	Symmetry		3, 4, 5	49		51	%
	Harmonic Spurious		3, 4, 6			-30	dBc
	Nonharmonic Spurious					-60	dBc
Q and Q Period Jitter	No Noise on V _{CC}		3, 4, 6, 7		15	30	ps _{P-P}
	200 mV $_{P\text{-}P}$ from 1 MHz to $1\!\!\!/_2$ f $_O$ on		3, 4, 7, 8			35	ps _{P-P}
Output (Disabled)	Amplitude into 50 Ω		3, 9			75	mV _{P-P}
Output DC Resistance (bet	ween Q & Q)		3	50			ΚΩ
ENABLE (Terminal 14)	Input HIGH Voltage	V_{IH}	3, 9	V _{CC} -0.1	V _{CC}	V _{CC} +0.1	V
	Input LOW Voltage	V _{IL}		0.0		0.20	V
	Input HIGH Current	I _{IH}			3	5	mA
	Input LOW Current	I _{IL}				-1	mA
	Propagation Delay	t _{PD}				1	ms
DC Power Supply	Operating Voltage	V _{CC}	1, 3	+3.13	+3.30	+3.47	VDC
	Operating Current	I _{CC}			20	40	mA
Operating Ambient Temperature		T _A	1, 3	0		+70	°C
Lid Symbolization (YY = Ye	Lid Symbolization (YY = Year, WW = Week)		RFM SC3027B 380.00 MHz YYWW				

CAUTION: Electrostatic Sensitive Device. Observe precautions for handling. *NOTES:*

- Unless otherwise noted, all specifications include any combination of load VSWR, VCC, and TA. In addition, Q and Q are terminated into 50 Ω loads to ground. (See: Typical Test Circuit.)
- One or more of the following United States patents apply: 4,616,197; 4,670,681; 7.
 4,760.352.
- 3. The design, manufacturing process, and specifications of this device are subject to change without notice.
- 4. Only under the nominal conditions of 50 Ω load impedance with VSWR \leq 1.2 and nominal power supply voltage.
- Symmetry is defined as the pulse width (in percent of total period) measured at the 50% points of Q or Q. (See: Timing Definitions.)
- Jitter and other spurious outputs induced by externally generated electrical noise on V_{CC} or mechanical vibration are not included. Dedicated external voltage regulation and careful PCB layout are recommended for optimum performance.
- Applies to period jitter of Q and Q. Measurements are made with the Tektronix CSA803 signal analyzer with at least 1000 samples.
- Period jitter measured with a 200 mV_{P-P} sine wave swept from 1 MHz to one-half of f_O at the V_{CC} power supply terminal.
- The outputs are enabled when Terminal 8 is at logic HIGH. Propagation delay is defined as the time from the 50% point on the rising edge of ENABLE to the 90% point on the rising edge of the output amplitude or as the fall time from the 50% point to the 10% point. (SEE: Timing Definitions.)

Electrical Connections


Terminal Number	Connection		
1	V _{CC}		
2	Ground		
3	NC or Ground		
4	Q Output		
5	Q Output		
6	Ground		
7	Ground		
8	ENABLE		
LID	Ground		



Case Design

All pads consist of 30 microinches (min) electroless gold on 50 microinches (min) electroless nickel over base metal. The metallic center pad was designed for mechanical support. Grounding of this pad is optional.

Lid symbolization, including terminal 1 locator dot, are in contrasting ink. Symbolization varies by model number. For purposes of illustration, only terminal 1 dot is shown.



Dimensions Millimeters Inches Min Max Min Max 13.46 13.97 0.530 0.550 Α 0.380 В 9.14 9.66 0.360 С 2 05 Nominal 0.081 Nominal D 3.56 Nominal 0.141 Nominal F 2.24 Nominal 0.088 Nominal F 1.27 Nominal 0.050 Nominal 2.54 Nominal 0.100 Nominal G Н 3.05 Nominal 0.120 Nominal J. 1.93 Nominal 0.076 Nominal Κ 5.54 Nominal 0.218 Nominal 0.170 Nominal L 4.32 Nominal М 4.83 Nominal 0.190 Nominal 0.020 Nominal Ν 0.50 Nominal


Footprint

Actual size footprint:




Typical Printed Circuit Board Land Pattern

A typical land pattern for a circuit board is shown below. Grounding of the metallic center pad is optional.

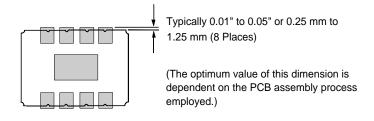

Typical Test Circuit



*Power Splitter, Mini-Circuits ZFSC2-4

Timing Definitions

Propagation Delay:

