

KR Electronics 2555 Notch Filter

General Description


KR 2555 is a 65 MHz differential notch filter. The filter is designed for 100 Ω source and load impedance. Other notch frequencies, bandwidths and impedances are available. Please consult the factory.

Features

- Differential Notch Filter
- 100 Ω
- DIP Package

Typical Performance

Overall Response

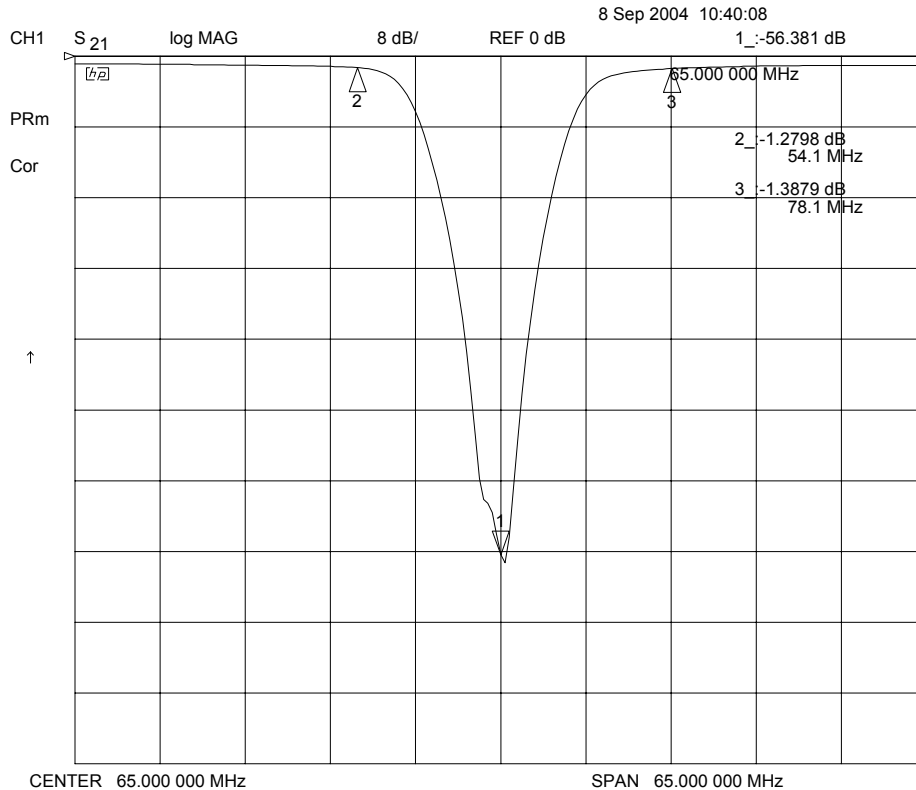

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2555

Specifications

Parameter	Specification
Filter type	Differential Notch
Notch Frequency	65 MHz
Maximum 3 dB Bandwidth	24 MHz
Typical 3 dB Bandwidth	15.25 MHz
Attenuation at 65 MHz	> 40 dB
Source & Load	100 Ω

Physical Dimensions

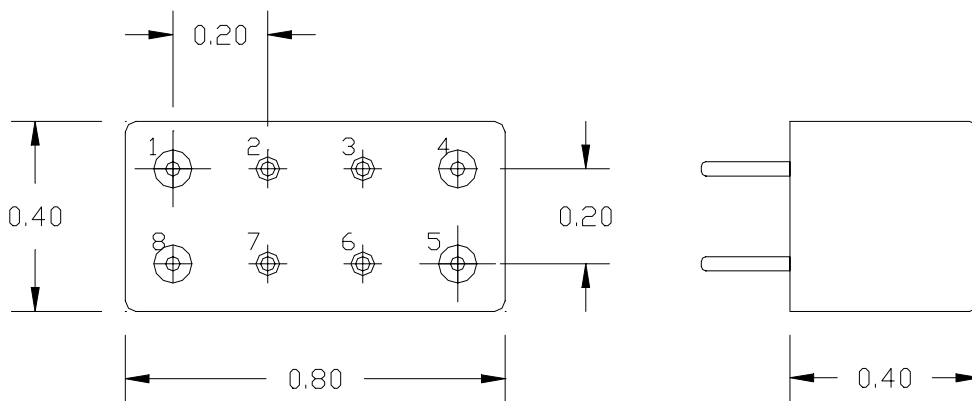

NOTES:

1. FILTER IS BI-DIRECTIONAL
2. ALL PINS ARE 0.030" DIA
3. DIMENSIONS ARE IN INCHES

Pin 1—IN

Pin 8—IN

Pin 4—OUT

Pin 5—OUT

All other pins are connected to case