

AX32X0

AX32X0

Acriche series is designed for AC source operation and high flux output applications.

Acriche is a semi-permanent and environmental friendly semiconductor lighting that can be used in AC without additional device.



Acriche's thermal management perform exceeds other power LED solutions.

It incorporates state of the art SMD design and Thermal emission material.

Acriche is ideal light sources for general illumination Applications.

Features

- Connect directly in AC power
- Power Saving
- Long Life Time
- Simple BOM
- Miniaturization
- Low thermal resistance
- SMT solderbility
- Lead Free product
- RoHS compliant

Applications

- Architectural lighting
- Task lighting
- Decorative / Pathway lighting
- Household appliances

* The appearance and specifications of the product can be changed for improvement without notice.





Part number of AX32X0

1. Part Number form : A $X_1 X_2 X_3 X_4 X_5$

X ₁	Color
W	Pure White
N	Warm White

X ₂	Acriche Series
1	-
2	-
3	A3

X ₃	LENS Type
2	Dome Type

X ₄	Operating Voltage [V]
0	100 / 110
1	_
2	220 / 230
3	-

X ₅	РСВ Туре
0	Emitter
1	-

2. Part Number of AX32X0


Part number	Operating voltage	Operating current
AW3200 / AN3200	100V/110V [RMS]	40mA [RMS]
AW3220 / AN3220	220V/230V [RMS]	20mA [RMS]






Outline dimensions

1. AX3200

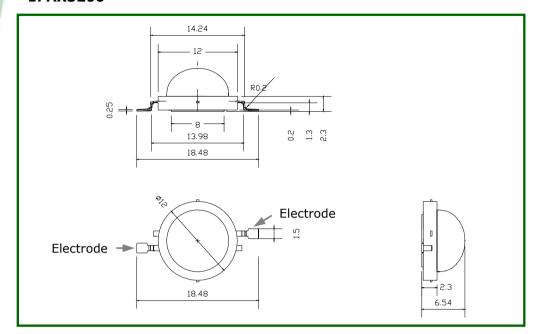

2. AX3220

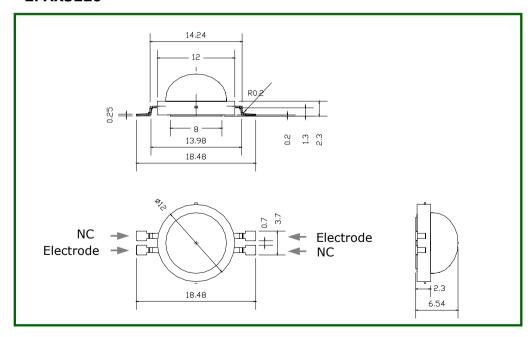

- [1] All dimensions are in millimeters. (tolerance : ± 0.2)
- [2] Scale: none
- [3] This drawing without tolerances are for reference only
- [4] Slug of package isn't connected to anode or cathode
- [5] NC pin isn't connected to electrode





1. AW3200

1-1 Electro-Optical characteristics at 100V/110V Ta=25°C

Parameter	Symbol	Value			Unit
	Symbol	Min	Тур	Max	Onit
Luminous Flux [1]	$\Phi_{V}^{[2]}$	-	195	-	lm
Illuminance ^[3]	Φ_{l}	-	220	-	lx
Correlated Color Temperature [4]	CCT	-	6300	-	K
CRI	R _a	-	70	-	-
Operating Current	$ m I_{opt}$	-	40	-	mA [RMS]
Power Dissipation	P_{D}	3.3		W	
Operating Frequency	Freq	50 / 60		Hz	
View Angle	2⊝ 1/2		110		deg.

1-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Voltage	v opt ^[5]	115/127	V [RMS]
Power Dissipation	P_{D}	6.4	W
Junction Temperature	T_{j}	125	٥C
Operating Temperature	T_{opr}	-30 ~ +85	٥C
Storage Temperature	T_{stg}	-40 ~ +120	٥C
ESD Sensitivity	-	±2,000V HBM	-

- [1] Acriche series maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- [2] Φ_V is the total luminous flux output as measured with an integrated sphere.
- [3] Illuminance is measured at 50cm distance
- [4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram. CCT $\pm 5\%$ tester tolerance
- [5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country. It is recommended that the temperature of lead frame should be below 70 $^{\circ}$ C.



2. AN3200 (CRI 70)

2-1 Electro-Optical characteristics at 100V/110V Ta=25°C

Parameter	Symbol	Value			Unit
	Symbol	Min	Тур	Max	Onit
Luminous Flux [1]	$\Phi_{V}^{[2]}$	-	150	-	lm
Illuminance ^[3]	Φ_{l}	-	170	-	lx
Correlated Color Temperature [4]	ССТ	-	3000	-	K
CRI	R _a	-	70	-	-
Operating Current	$ m I_{opt}$	-	40	-	mA [RMS]
Power Dissipation	P_{D}	3.3		W	
Operating Frequency	Freq		50 / 60		Hz
View Angle	2⊝ 1/2		110		deg.

2-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Voltage	V _{opt} ^[5]	115/127	V [RMS]
Power Dissipation	P_{D}	6.4	W
Junction Temperature	T_{j}	125	٥C
Operating Temperature	T_{opr}	-30 ~ +85	oC.
Storage Temperature	T_{stg}	-40 ~ +120	٥C
ESD Sensitivity	-	±2,000V HBM	-

- [1] Acriche series maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- [2] Φ_V is the total luminous flux output as measured with an integrated sphere.
- [3] Illuminance is measured at 50cm distance
- [4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram. CCT $\pm 5\%$ tester tolerance
- [5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country. It is recommended that the temperature of lead frame should be below 70 $^{\circ}$ C.



3. AW3220

3-1 Electro-Optical characteristics at 220V/230V Ta=25°C

Parameter	Symbol	Value			Unit
	Symbol	Min	Тур	Max	Unit
Luminous Flux [1]	$\Phi_{V}^{[2]}$	-	195	-	lm
Illuminance ^[3]	Φ_{l}	-	220	-	lx
Correlated Color Temperature [4]	ССТ	-	6300	-	К
CRI	R _a	-	70	-	-
Operating Current	$ m I_{opt}$	-	20	-	mA [RMS]
Power Dissipation	P_{D}	3.3		W	
Operating Frequency	Freq		50 / 60		Hz
View Angle	2⊝ 1/2		110		deg.

3-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Voltage	V _{opt} ^[5]	253/265	V [RMS]
Power Dissipation	P_{D}	6.4	W
Junction Temperature	T _j	125	oC
Operating Temperature	T_{opr}	-30 ~ +85	oC
Storage Temperature	T _{stg}	-40 ~ +120	°C
ESD Sensitivity	-	±2,000V HBM	-

- [1] Acriche series maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- [2] Φ_V is the total luminous flux output as measured with an integrated sphere.
- [3] Illuminance is measured at 50cm distance
- [4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram. CCT $\pm 5\%$ tester tolerance
- [5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country. It is recommended that the temperature of lead frame should be below 70 $^{\circ}$ C.





4. AN3220 (CRI 70)

4-1 Electro-Optical characteristics at 220V/230V Ta=25°C

Parameter	Symbol	Value			l lmit
Parameter		Min	Тур	Max	Unit
Luminous Flux ^[1]	$\Phi_{V}^{[2]}$	-	150	-	lm
Illuminance ^[3]	Φ_{l}	-	170	-	lx
Correlated Color Temperature [4]	ССТ	-	3000	-	K
CRI	R _a	-	70	-	-
Operating Current	$ m I_{opt}$	-	20	-	mA [RMS]
Power Dissipation	P_{D}	3.3		W	
Operating Frequency	Freq	50 / 60		Hz	
View Angle	2⊝ 1/2	110		deg.	

4-2 Absolute Maximum Ratings


Parameter	Symbol	Value	Unit
Operating Voltage	v opt ^[5]	253/265	V [RMS]
Power Dissipation	P_{D}	6.4	W
Junction Temperature	T _j	125	oC
Operating Temperature	T_{opr}	-30 ~ +85	٥C
Storage Temperature	T _{stg}	-40 ~ +120	oC
ESD Sensitivity	-	±2,000V HBM	-

- [1] Acriche series maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- [2] Φ_V is the total luminous flux output as measured with an integrated sphere.
- [3] Illuminance is measured at 50cm distance
- [4] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram. CCT $\pm 5\%$ tester tolerance
- [5] 'Operating Voltage' doesn't indicate the maximum voltage which customers use, but it means tolerable voltage according to the voltage variation rate by one's country. It is recommended that the temperature of lead frame should be below 70 $^{\circ}$ C.




Color spectrum

1. Pure white

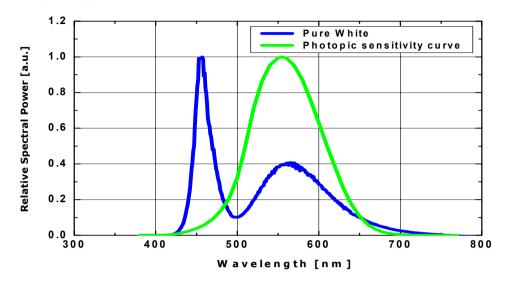


2. Warm white

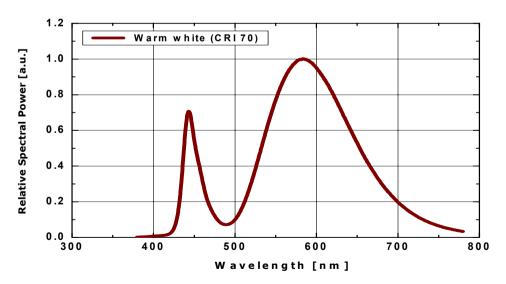




Current - Voltage characteristics

1. AX3200 with external resistor @100V

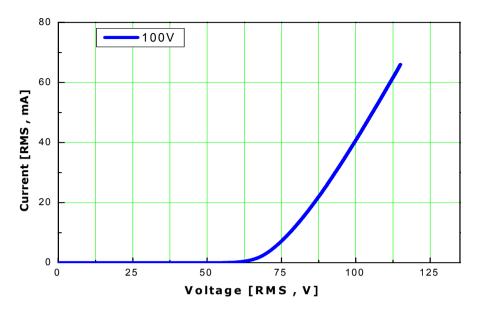


2. AX3200 with external resistor @110V

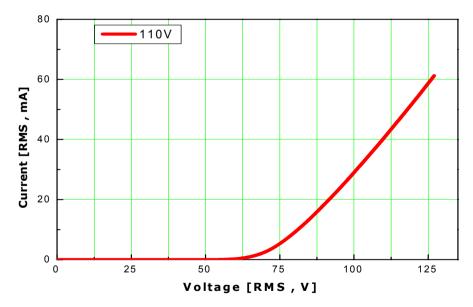


Current - Voltage characteristics

3. AX3220 with external resistor @220V

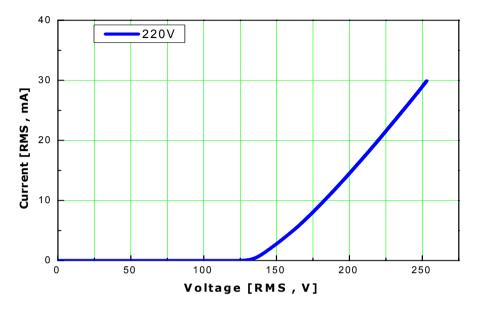


4. AX3220 with external resistor @230V

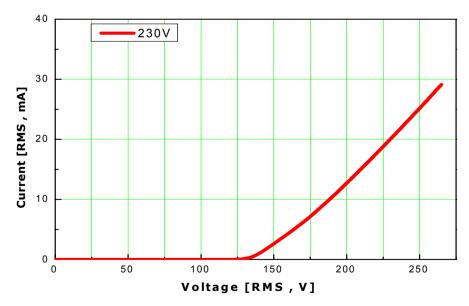




Voltage - Relative flux characteristics

1. AX3200 with external resistor @100V

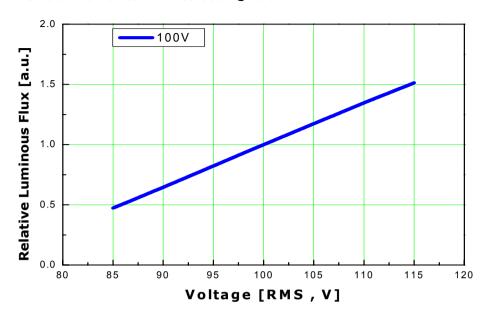


2. AX3200 with external resistor @110V

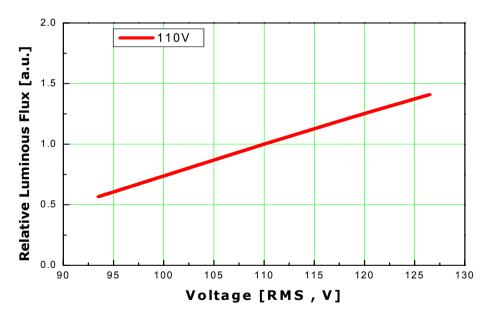




Voltage - Relative flux characteristics

3. AX3220 with external resistor @220V

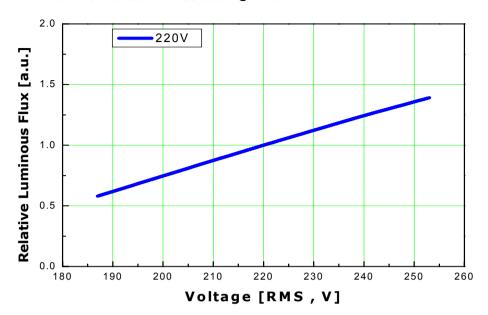

4. AX3220 with external resistor @230V

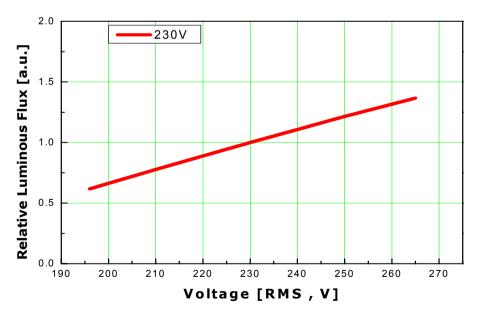







Relative Flux – Junction temperature characteristics

1. AX32X0

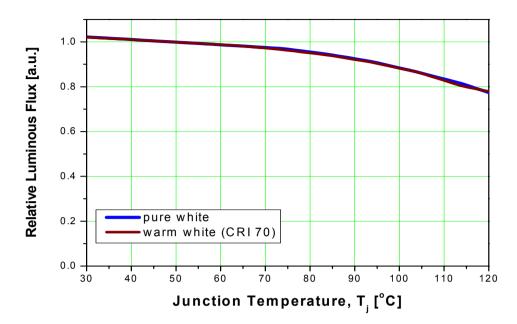

Typical dome type radiation pattern


1. AX32X0

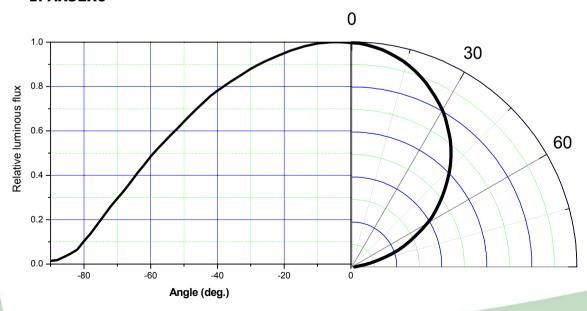



Acriche Binning structure graphical representation

1. AX32X0

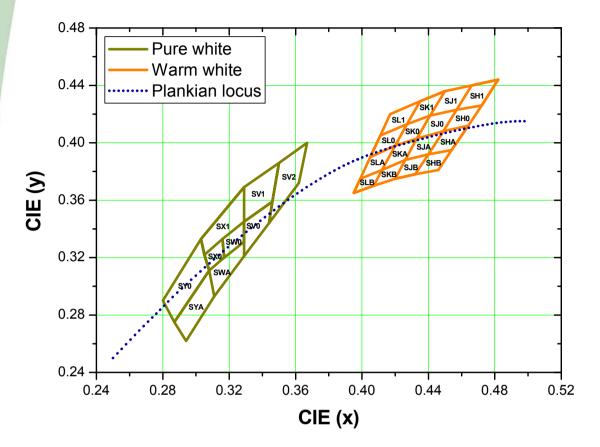


^{*}Notes: For more detail Acriche binning, see the Acriche Binning and Labeling document.



Operating instructions of AX32X0

1. Operating circuit



2. Resistor sheet

	AX3200		AX3220		
VF	Driving current : 40mA [RMS]		Driving curren	t : 20mA [RMS]	
Bin	100V	110V	220V	230V	
	Resistor value	Resistor value	Resistor value	Resistor value	
Α	275Ω	500 Ω	2k Ω	2.45k Ω	
В	275Ω	500 Ω	2k Ω	2.45k Ω	
С	210 Ω	400 Ω	1.8k Ω	2.25k Ω	
D	-	-	1.5k Ω	2k Ω	

- [1] Acriche must be used with resistance certainly.
- [2] AW3200/AN3200 may be driven at maximum rated current of 40mA [RMS], AW3220/AN3220 may be driven at maximum rated current of 20m [RMS].
- [3] The tolerance of current is $\pm 5\%$ on each resistance rank.
- [4] When the resistance is used, Check the rated power of resistance. Apply the proper resistance

 The rated power = operating current² X resistance



Operating instructions of AX32X0


3. Operating temperature



Surface Temperature (Ts)

Parameter	Value	Unit
R⊖ _{js}	6 ~ 7	℃/W
T _j max	125	ڻ ا
T _s max	100	Ç

4. Thermal modeling




- [1] Acriche must be used with proper heat management.
- [2] It is recommended that the temperature of board should be below 70 °C.
- [3] For more information, refer to Z Power led Thermal Management Guide. (www.essc.co.kr/ HOMEPAGE/home kor/product/spec/thermal.pdf)



Operating instructions of AX32X0

5. Heat sink





Specification & Size	T _B (°C)	ROBA(°C /W)
Size: $44 \times 44 \text{ mm}$ S: 7mm T_B : 4mm , D_H : $22.\text{mm}$ F_H : 18mm N : 7ea Footprint: 745mm^2 Power Dissipation: 4W	73.8	10




Specification & Size	T _B (°C)	R⊖ _{BA} (°C /W)
Size: $50 \times 50 \text{ mm}$ S: T_B : mm, D_H : 25 mm F_H : mm N : Footprint: 745mm^2 Power Dissipation: $4W$	56.2	5







Recommended solder pad


1. Solder pad







2. Solder paste pattern



- Paste thickness: 0.2 mm


Note:

- 1. All dimensions are in millimeters (tolerance : ± 0.2)
- 2. Scale none
- *The appearance and specifications of the product may be changed for improvement without notice.



Solder profile

1. Reflow solder conditions / profile

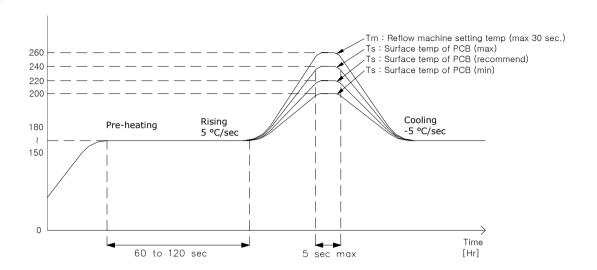

2. Hand Solder conditions

2-1 Lead: Not more than 3 seconds @MAX280℃

2-2 Slug: Use a thermal-adhesives


* Caution

- [1] Reflow soldering should not be done more than one time.
- [2] Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, suitable tools have to be used.
- [3] Die slug is to be soldered.
- [4] When soldering, do not put stress on the LEDs during heating.
- [5] After soldering, do not warp the circuit board.
- [6] Recommend to use a convection type reflow machine with 7 \sim 8 zones.





Emitter Reel Packaging

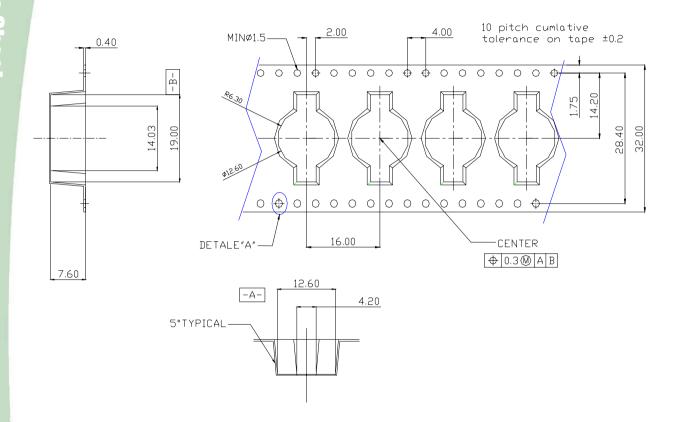


Note:

- 1. The number of loaded products in the reel is 250ea
- 2. All dimensions are in millimeters (tolerance : ± 0.2)
- 3. Scale none
- *The appearance and specifications of the product may be changed for improvement without notice.






Packaging Structure

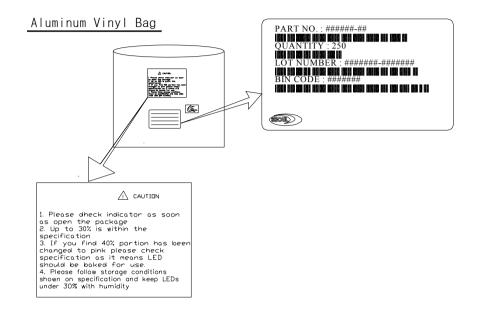


Outer Box

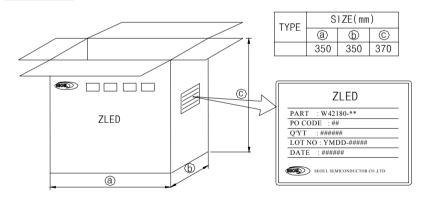

Note:

- 1. 6~10 reels are loaded in box
- 2. Scale none
- 3. For more information about binning and labeling, refer to the Application Note 1



Precaution for use

- [1] Acriche series run on high voltage such as 110 V or 220 V.
- [2] Please don't touch the PCB surface, which has built-in terminals and chips, with your hands or metals, while Acriche series is running.
- [3] Please don't add or change wires, while Acriche series is running.

Handling of silicone resin for LEDS

- [1] Acriche series is encapsulated by silicone resin for the highest flux efficiency.
- [2] Notes for handling of Silicone resin Acriche series.
- [3] Avoid touching silicone resin parts especially by sharp tools such as Pincette (Tweezers).
- [4] Avoid leaving fingerprints on silicone resin parts.
- [5] Dust sensitivity silicone resin need containers having cover for storage.
- [6] When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevent.
- [7] Please do not force over 3000 gf impact or pressure diagonally on the silicon lens. It will cause fatal damage of this product.
- [8] Please do not recommend to cover the silicone resin of the Acriche series with other resin (epoxy, urethane, etc).