

Open Carrier Double-Balanced Mixer For Microwave Telecommunications

Rev. V2

Features

- LO 4.5 TO 7.0 GHz
- RF 4.5 TO 7.0 GHz
- IF DC TO 2.0 GHz
- LO DRIVE +7 dBm (NOMINAL)
- MICROSTRIP INTERFACE


Description

The MC2407 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated as-Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Ordering Information

| Part Number | Package |
|-------------|--------------|
| MC2407 | Open Carrier |
| MC2407-2 | Open Carrier |

Product Image



Electrical Specifications: $Z_0 = 50\Omega$ Lo = +7 dBm (Downconverter application only)

| Parameter Test Conditions | | Units | Typical | Guaranteed | |
|--|---|----------|------------|------------|---------------|
| Turumeter | rest containons | Omts | | +25°C | -54º to +85ºC |
| SSB Conversion Loss (max) & SSB Noise Figure (max) | fR =4.5 to 7 GHz , fL = 4.5 to 7 GHz , fI = 0.01 to 1 GHz fR =4.5 to 7 GHz , fL = 4.5 to 7 GHz , fI = 0.01 to 2 GHz | dB dB | 5.2 5.5 | 6.5 7.0 | 7.0 7.5 |
| Isolation, L to R (min) | fL = 4.5 to 7 GHz | dB | 30 | 20 | 18 |
| Isolation, L to I (min) | fL = 4.5 to 7 GHz | | 40 | 25 | 23 |
| Isolation, R to I (min) | fL = 4.5 to 7 GHz | dB | 20 | 10 | 8 |
| 1 dB Conversion Comp. | fL = +7 dBm | dBm | +0 | | |
| Input IP3 | fR1 = 6 GHz at –10 dBm, fR2 = 6.01 GHz at –10 dBm, fL = 5 GHz at +7 dBm | dBm | +10 | | |

Commitment to produce in volume is not guaranteed.

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

[•] India Tel: +91.80.4155721


[•] China Tel: +86.21.2407.1588





Open Carrier Double-Balanced Mixer For Microwave Telecommunications


Rev. V2


Typical Performance Curves














Commitment to produce in volume is not guaranteed.

- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588
 - Visit www.macomtech.com for additional data sheets and product information.




Open Carrier Double-Balanced Mixer For Microwave Telecommunications

Rev. V2

Absolute Maximum Ratings

| Parameter | Absolute Maximum | | |
|-----------------------|--|--|--|
| Operating Temperature | -54°C to +85°C | | |
| Storage Temperature | -65°C to +100°C | | |
| Peak Input Power | +23 dBm max @ +25°C +20 dBm max @ +85°C | | |
| Peak Input Current | 50 mA DC | | |

Outline Drawing: Open Carrier * MC2407

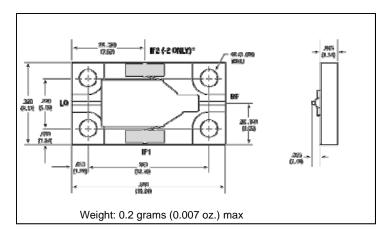

*For the base model, only the IF1 port is connected. For the "-2" model, only the IF2 port is connected.

 Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.