Rev. 08.15.07 NTQ123-DC Series 1 of 3

# NTQ123-DC Series

70 - 125 Watts

Total Power: 70-120 Watts Input Voltage: 36 - 72 VAC # of Outputs: Quad

### **Special Features**

- -48 VDC input
- Remote sense on outputs one and two
- Power fail and remote inhibit
- Single wire current sharing on outputs one and two
- Adjustable main outputs
- Built-in Class B EMI filter
- Overvoltage protection
- Overload protection
- Thermal overload protection

## Safety

**VPE** 0805/EN60950 (IEC950)

CSA CSA 22.2-234 Level 3 NEMKO EN 60950/EMKO-TUE

(74-sec) 203

**CB** Certificate and report

**CE** Mark (LVD)



## **Electrical Specifications**

Input

Input range 36 - 72 VDC

Inrush current 38 A max., cold start @ 25°C Efficiency 65% typical at full load

EMI filter FCC Class B conducted; CISPR 22 Class B conducted;

EN55022 Class B conducted; VDE 0878 PT3 class B conducted

and radiated.

Safety ground <1 mA @ 72 Vdc input

leakage current

Output

Maximum power 70 W for convection; 125 W with 30 CFM forced air

Adjustment range ±5% minimum

Hold-up time 20ms @ 120 W load, -48 Vdc input
Overload protection Short circuit protection on all outputs

Case overload protected @ 110-145% above peak rating

Overvoltage protection 3.3 V output; 5 V output: 10% to 35% above nominal output

**Logic Control** 

Power failure TTL logic signal goes high 100-500 msec after 5 V output; it

goes low at least 4 msec before loss of regulation

Remote inhibit Requires an external TTL Signal to inhibit outputs

Remote sense Compensates for 0.5 V lead drop minimum, will ope

Compensates for 0.5 V lead drop minimum, will operate without remote sense connected. Reverse connection protection.





Rev. 08.15.07 NTQ123-DC Series

## **Environmental Specifications**

Operating temperature: 0° to 50°C ambient. Derate each output 2.5% per degree from

50° to 70°C

Storage temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ Temperature coefficient:  $\pm 0.4\%$  per  $^{\circ}\text{C}$ 

Electromagnetic

susceptibility: Designed to meet EN61000-4, -2, -3, -4, -5, -6, -8, -11 Level 3

Humidity: Operating; non-condensing 5% to 95% RH

Vibration: Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at

four major resonances 0.7 G peak 5 Hz to 500 Hz, operational


MTBF demonstrated: >1 million hours at full load and 25°C ambient conditions


Ordering Information									
Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling		Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PARD) <sup>3</sup>		
NTQ123-DC	+3.3 V (2.5 - 5.7)	2 A	14 A	25 A	28 A	±2%	50 mV		
	+5 V (2.5 - 5.7)	0 A	12.5 A	24 A	28 A	±2%	50 mV		
	+12 V	0 A	1 A	2 A	4 A	±3%	120 mV		
	-12 V	0 A	0.5 A	1 A	1.5 A	±3%	120mV		


- 1. Peak current lasting <30 seconds with a maximum 10% duty cycle.
- 2. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
- 3. Peak-to-peak with 20 MHz bandwidth and 10  $\mu F$  in parallel with a 0.1  $\mu F$  capacitor at rated line voltage and load ranges.
- 4. Minimum loads are required. In parallel minimum loads are 2 A on the 5 V output and 2 A on the 3.3 V output for each power supply

Rev. 08.15.07 NTQ123-DC Series 3 of 3

### **Mechanical Drawing**

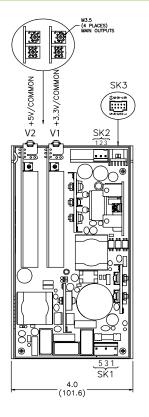

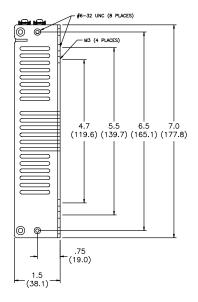



Pin Assignments				
SK1	PIN 1	Ground		
	PIN 3	-48 Vdc		
	PIN 5	Return		
SK2	PIN 1	+12 V		
	PIN 2	Common		
	PIN 3	-12 V		
SK3	PIN 1	3.3 V SWP		
	PIN 2	-3.3 V sense		
	PIN 3	+3.3 V +sense		
	PIN 4	5 V SWP		
	PIN 5	Common		
	PIN 6	+5 V ssense		
	PIN 7	-5 V sense		
	PIN 8	+ inhibit		
	PIN 9	- inhibit		
	PIN 10	Power fail		

#### **Mating Connectors**

(SK1) DC Input: Molex: 09-50-8051 (USA) Molex: 09-91-0500 (UK)

PINS: 08-58-0111

V1 & V2: Molex BB-124-08 (SK2) ±12 V

Molex:09-50-8031 (USA)

Molex: 09-91-0300 (UK) PINS: 08-58-0111

Molex: 90142-0010 (SK3) Control PINS: 90119-2110

Amp: 87977-3 PINS: 87309-8

Astec Connector Kit #70-841-012, includes all of the above

- 1. Specifications subject to change without notice.
- 2. All dimensions in inches (mm), tolerance is ±0.02" (±0.5mm)
- 3. Remote inhibit requires an external 5 V @ 10 mA to activate
- 4. Mounting maximum insertion depth is 0.12"
- 5. Warranty: 2 year
- 6. 1.49 lb./ 0.68 kg

#### **Americas**

5810 Van Allen Way Carlsbad, CA 92008

USA

Telephone: +1 760 930 4600 Facsimile: +1 760 930 0698

#### Europe (UK)

Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX United Kingdom

Telephone: +44 (0) 1384 842 211 Facsimile: +44 (0) 1384 843 355

### Asia (HK)

16th - 17th Floors, Lu Plaza 2 Wing Yip Street, Kwun Tong Kowloon, Hong Kong

Telephone: +852 2176 3333 Facsimile: +852 2176 3888

#### For global contact, visit:

www.astecpower.com www.artesyn.com technicalsupport@astec.com technicalsupport@artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

#### **Emerson Network Power.**

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

#### EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2007 Emerson Electric Co.