



FEATURES

- 3Ux8HP package
- 300W power at 0-55°C
- PICMG 2.11 Compliant
- Widerange 90-264VAC Input
- Active power factor correction to EN61000-3-2
- Class B conducted EMI performance
- 47-pin I/O Connector
- 81% efficiency
- Full power with just 250lfm airflow
- Hot-swap capable

DESCRIPTION

The cPCI-A-3U-300C is a high-reliability, 300W, continuous power, 3Ux8HP CompactPCI[™] power supply developed for chassis' with airflows as low as 250lfm. The use of 2 converters operating in parallel for the 3.3V and the 5V outputs enables maximum current draw on the two outputs simultaneously. Compliant with the PICMG 2.11 standard.

With a widerange input of 90-264VAC, safety agency approvals to UL60950 and EN60950, EMI compliance to Class B FCC and EN55022 standards, the cPCI-A-3U-300C was designed with globally-deployed systems in mind. Additional features include remote sense compensation, unit enable control (EN#), output inhibit control (INH#), output fault signal (FAL#), and thermal warning signal (DEG#). LEDs are provided for visual indication of input power presence and output fault condition.

cPCI-A-3U-300C Series

300W 3Ux8HP AC/DC CompactPCI™

SELECTION GUIDE							
Model Number Po	Power	Output Current ¹				25	
		5V	3.3V	12V	-12V	For full details go to www.murata-ps.com/rohs	COMPLIANT 2002/95/EC
CPCI-A-3U-300C	300W	30A	40A	5A	0.5A	Yes	Yes

INPUT CHARACTERISTICS					
Parameter	Conditions	Min	Тур	Max	Units
Input Operating Voltage		90		264	Vac
Input Frequency		47		63	Hz
Input Current				5.0	A _{rms}
Power Factor			0.98	0.99	
Inrush Current	230Vac			50	A _{pk}

OUTPUT CHARACTERISTICS Output Current Output Nominal Voltage Load Regulation¹ Min Max V1² +5.0Vdc 0A 30A ±1% V2² +3.3Vdc 0A 40A ±1% V32 +12Vdc 0A 5A ±4% V4² 0A 0.5A -12Vdc ±4% Parameter Conditions Min Тур Max Units Line Regulation All outputs 0.5 % PARD (V1 & V2)5 20MHz bandwidth ٩N mV_{D-D} mV_{p-p} PARD (V3 & V4)5 20MHz bandwidth 120 Hold-up Time 230VAC, full load 14 msec Turn-on Delay 2 sec 10% to 90% of full value **Rise Time** 30 msec ∆V, 50% load step ±5 $%V_{nom}$ **Transient Response** Settling time 500 µsec Over-Voltage and Short Circuit V1, V2, & V3: Latching 110 130 $%V_{nom}$ Protection⁶ Remote Sense Compensation³ V1, V2 300 mV Current Share Tolerance⁴ V1, V2 ±10 % 3 Pri-Sec kVac Isolation Pri-Chassis 1.5 kVac Sec-Chassis 100 Vdc

Notes: 1. Total power limited to 300W.

- 2. Maximum combined power from V1 & V3 not to exceed 185W. Maximum combined power for V2 & V4 not to exceed 140W.
- 3. Maximum voltage compensation for cable losses .
- 4. Tolerance applicable up to 6 parallel units. Single wire current share on V1 & V2 for 50% to 100% load.
- 5. Measured across $10\mu F$ tantulum load capacitor paralleled with $0.1\mu F$ ceramic capacitor.
- 6. Automatic recovery upon removal of overload condition.

muRata Ps Murata Power Solutions

cPCI-A-3U-300C Series

300W 3Ux8HP AC/DC CompactPCI™

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min	Тур	Мах	Units
Efficiency	Full load, 240Vac		81		%
Switching Frequency	Main Converter		68		kHz
MTBF	Calculated per Bellcore standard B332 Gb 30°C	300			khrs
Weight	Unpackaged		840		g

PROTECTION					
Parameter	Conditions/Response		Inception		
			Тур	Max	Units
Inrush Current Limit	230VAC			50	A _{rms}
Input Protection	Internal line fuse			6.3	A _{rms}
Over-voltage Protection	V1, V2, & V3 with latched shutdown	110		130	$%V_{nom}$
Parameter	Conditions/Response				
Output Overload Protection	Outputs are individually protected against overloads and indefinite short circuit with automatic recover	y upon re	emoval of	the fault	condition.
Hot-Swap Capability	Protected by internal ORing diodes				
Output Fault Isolation	Output isolation devices are present in all outputs to isolate faults within a failed power supply.				
Thermal Shutdown	Automatic recovery upon restoration to operational temperatures				

STATUS & CONTROL SIGNALS &	INDICATORS
Name	Description
Enable (EN#)	Short pin on connector will enable the outputs when the mating pin is grounded. Supply will not power up until this pin is engaged to its mate in the backplane. Unit output will be inhibited as pin is disengaged from the mating connector.
Output Inhibit (INH#)	Secondary referenced; active low, TTL compatible. Logic "0" or short circuit to output return inhibits all outputs.
Output Fault (FAL#)	Secondary referenced; TTL compatible. Logic "0" denotes that one of the output voltages has fallen below the lower regulation limit.
Remote Sense (RS+, RS-)	Connection of the sense leads across the load at the desired point of regulation will compensate for voltage distribution drops up to 200mV between the output terminals of the power supply and the point of connection.
Thermal Warning (DEG#)	Secondary referenced; TTL compatible. Logic "0" denotes a thermal warning; nominally, 10°C prior to thermal shutdown.
	A single bi-color Indicator LED
Power Present Indicator LED	Green LED - indicates output in range
	Red LED - indicates one or more outputs below 10% of specified range.

ENVIRONMENTAL CHARACTERISTICS					
Parameter	Conditions	Min	Тур	Max	Units
Ambient Operating Temperature	Full load with 250LFM forced air and derating linearly above 55°C to 70°C, by 2.5% per °C	-5		55	°C
Ambient Storage Temperature		-40		85	°C
Operating Humidity	Non-condensing			95	%
Storage Humidity	Non-condensing			95	%
Altitude	Operating			6000	ft
	Storage			40000	ft

muRata Ps Murata Power Solutions


300W 3Ux8HP AC/DC CompactPCI™

ELECTROMAGNETIC COMPATIBILITY (EMC)		
Characteristic	Compliance	
Input Current Harmonics	EN61000-3-2	
Conducted Emissions	EN55022, Class B, with external line filter	
Electrostatic Discharge (ESD)	EN61000-4-2, Level 4	
Radiated Immunity	EN61000-4-3, Level 3	
Conducted Immunity	EN61000-4-4, Level 3, Criterion A	
Line Voltage Surge	EN61000-4-5, Level 3, line-to-line 1kV line to chassis 2kV	
Line Voltage Interruptions	EN61000-4-11	

CERTIFICATIONS	
Agency/Characteristic PENDING	Standard
UL	UL60950-1
CSA	CSA C22.2-234, Level 3 (per cUL)
CE	EN-60950, Class 1, SELV CE-Mark
RoHS	EN Directive 2002/95/EC; self-certified

SAFETY AGENCY R	ATINGS
Input Voltage	100-240Vac
Input Current	5A

MECHANICAL DIMENSIONS

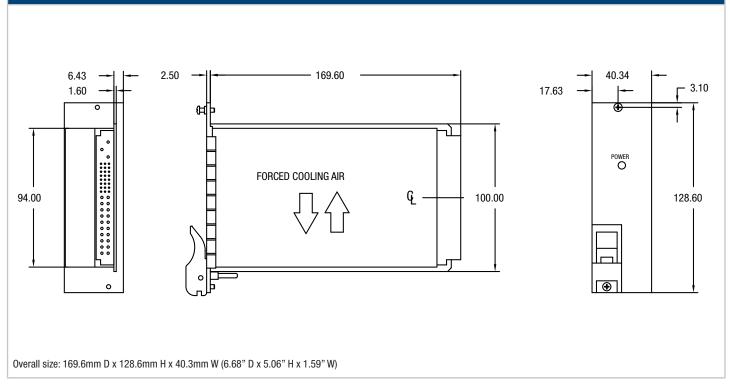

muRata Ps Murata Power Solutions

cPCI-A-3U-300C Series

300W 3Ux8HP AC/DC CompactPCI™

CONNEC	TOR		
Pin ¹	Staging ²	Signal Name	Description
1-4	М	V1	V1 Output
5-12	Μ	RTN	V1 and V2 Return
13-18	Μ	V2	V2 Output
19	Μ	RTN	V3 Return
20	Μ	V3	V3 Output
21	Μ	V4	V4 Output
22	Μ	RTN	Signal Return
23	M	RESERVED	Reserved
24	Μ	RTN	V4 Return
25	Μ	GA0	Geographic Address Bit 0
26	Μ	RESERVED	Reserved
27	S	EN#	Enable
28	Μ	GA1	Geographic Address Bit 1
29 ³	Μ	V1ADJ	V1 Adjust
30	М	V1 SENSE	V1 Remote Sense
31	М	GA2	Geographic Address Bit 2
32³	М	V2ADJ	V2 Adjust
33	М	V2 SENSE	V2 Remote Sense
34	М	S RTN	Sense Return
35	М	V1 SHARE	V1 Current Share
36	М	V3 SENSE	V3 Remote Sense
37³	М	IPMB SCL	IPMB Serial Clock Line
38	М	DEG#	Degrade Signal
39	М	INH#	Inhibit
40 ³	М	IPMB SDA	IPMB Serial Data Line
41	М	V2 SHARE	V2 Current Share
42	М	FAL#	Fail Signal
43³	М	IPMB PWR	IPMB Power Input
44 ³	М	V3 SHARE	V3 Current Share
45	L	CGND	Chassis Grnd (Safety Grnd)
46	M	ACN/+DC IN	AC Input Neutral/+DC Input
47	M	ACL/-DC IN	AC Input Line/-DC Input

RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300°C for 10 seconds. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems.

For further information, please visit www.murata-ps.com/rohs

Notes: 1. Pin numbers correspond to the female backpane connector.

2. "L" denotes long pin length (first mate, last break)

"M" denotes medium pin length

"S" denotes short pin length (last mate, first break)

3. This function not used in the CPCI-A-3U-300C Series.



muRata Ps Murata Power Solutions

Murata Power Solutions, Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED 02/04/09

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

USA:	Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com
Canada:	Toronto, Tel: (866) 740-1232, email: toronto@murata-ps.com
UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
Germany:	München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com
Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com
China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com
Singapore:	Parkway Centre, Tel: +65 6348 9096, email: singapore@murata-ps.com