
# DATA SHEET

# **10GBPS 850NM VCSEL** ARRAYS

# V850-2106-001, V850-TBD-001

### **FEATURES:**

- 850nm isolated cathode and anode VCSEL array
- Capable of 10Gbps per channel modulation
- Capable of flip chip mounting

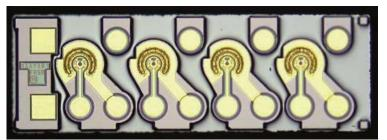

The V850-2106-001 and the V850-TBD-001 are high-performance 850 nm VCSEL (Vertical Cavity Surface-Emitting Laser) array die optimized for highspeed data communications. The array die are ideal for use in manufacturing transceivers for parallel optical interconnects. The arrays are available in either 4 or 12 channel configurations.

Each device is a high radiance VCSEL designed to convert electrical current into optical power that can be used in fiber optic communications and other applications. As the current varies above threshold, the light intensity increases proportionally.

The V850-2106-001 and the V850-TBD-001 are designed to be used with inexpensive silicon or gallium arsenide detectors, but excellent performance can also be achieved with some indium gallium arsenide detectors.

The low drive current requirement makes direct drive from PECL (Positive Emitter Coupled Logic) or ECL (Emitter Coupled Logic) gates possible and eases driver design.

Designed to interface with 50/125 and 62.5/125um multimode fiber, the VCSELs produce circularly symmetric, non-astigmatic, narrow divergence beams that, with appropriate lensing, fiber couple all of the emitter power.


The dual top side contacts provide a minimum 1um Au for ease of wire bonding. Wire bonding should be done with minimal pressure to ensure the VCSEL is not damaged. The die must be mounted using thermally conductive media.

The VCSEL arrays are shipped on medium tack blue tape in 6 inch grip rings.

Part Number	Description
V850-2106-001	10Gbps 4 channel VCSEL die array, dual top side contact, semi- insulating substrate.
V850-TBD-001	10Gbps 12 channel VCSEL die array, dual top side contact, semi- insulating substrate



### **ABSOLUTE MAXIMUM RATINGS**

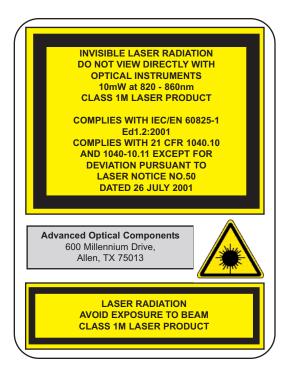

Parameter	Rating		
Storage temperature	-40 <sup>o</sup> C to +85 <sup>o</sup> C		
Operating temperature	0 to +85 <sup>0</sup> C		
Maximum Die Exposure Temperature	320 <sup>0</sup> C, 30 sec.		
Reverse Power Supply Voltage	5V		
Continuous Forward Current	12mA		
ESD exposure (Human body model)	200V		

**NOTICE:** Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operations section for extended periods of time may affect reliability.

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product

# ELECTRICAL-OPTICAL CHARACTERISTICS

 $T_A = 25^{O}C$  unless otherwise stated

VCSEL Parameters	<b>Test Condition</b>	Symbol	Min.	Тур.	Max.	Uniformity	Units	Notes
Optical Output Power	I <sub>F</sub> = 6.5mA	P <sub>O</sub>	1.0	2.0		15%	mW	2
Threshold Current		I <sub>TH</sub>	0.5	0.8	1.25	0.2	mA	
Threshold Current maximum deviation from 25 <sup>0</sup> C value	T <sub>A</sub> =0 to 70°C		-0.25		0.8	0.2	mA	
	T <sub>A</sub> =25 to 85℃	ΔI <sub>TH</sub>			1.0			3
	T <sub>A</sub> =0 to 25°C				0.2			
Temperature at minimum threshold current		Τ <sub>Ο</sub>	-10		30		°C	3
Slope Efficiency	T <sub>A</sub> =25°C	η	0.3	0.5	0.6	0.05	mW/mA	
	T <sub>A</sub> =-40°C				0.65			4
	T <sub>A</sub> =85°C		0.19					
Slope Efficiency Temperature Variation	T <sub>A</sub> =0 to 70℃	Δη/Δτ	-2000	-7000	-10000		ppm/ºC	5
Peak Wavelength	I <sub>F</sub> =6mA T <sub>A</sub> =0 to 70°C	$\lambda_{P}$	840	850	860	1	nm	
$\lambda_P$ Temperature Variation	I <sub>F</sub> =6mA T <sub>A</sub> =0 to 70°C	$\Delta\lambda_{\rm P}/\Delta T$		0.06			nm/ºC	
RMS Spectral Bandwidth	I <sub>F</sub> =6mA	Δλ		0.45	0.65		nm	
Theshold Voltage	T <sub>A</sub> =0 to 70°C	V <sub>TH</sub>			2		V	
Laser Forward Voltage	I <sub>F</sub> =6mA	V <sub>F</sub>		1.8	2.1	0.1	V	
Rollover		P <sub>max</sub>	4.0				mW	6
Rise/Fall Time	P <sub>avg</sub> = 2mW, Extinction Ratio = 5dB	T <sub>R</sub> T <sub>F</sub>		35 35	40 40		ps	7
Relative Intensity Noise	10GHz BW, I <sub>F</sub> =6mA	RIN		-135	-130		dB/Hz	
Series Resistance	$I_F = 6mA, T_A = 25°C$	40         50         63         3           R <sub>S</sub> 75         30         75						
	T <sub>A</sub> =-40°C				75		Ohms	
	T <sub>A</sub> =85°C		30					
Series Resistance Temperature Coefficient	I <sub>F</sub> = 6mA, T <sub>A</sub> =0 to 70°C	$\Delta { m R_S} / \Delta { m T}$		-3000			ppm/ºC	8
Capacitance	I <sub>F</sub> =6mA, F=1MHz	С			0.25	10%	pF	
Beam Divergence		Θ	15		30	10%	Degrees	9
Beam Divergence current variation		$\Delta \Theta / \Delta I_{F}$		0.6		10%	Degrees /mA	
Junction Thermal Impedance		Θj		1000			∘C/W	
Die Thermal Impedance		$\Theta_{P}$		100			°C/W	

**Uniformity** is the difference between the maximum and the minimum measured value across the array. **Maximum and Minimum** are defined per array.

### NOTES

- 1. Reliability is a function of temperature, see www.finisar.com/aoc.php for details.
- 2. For the purpose of these tests,  $I_F$  is DC current.
- 3. Threshold current varies as  $(T_A T_0)^2$ . It may either increase or decrease with temperature, depending upon relationship of  $T_A$  to  $T_0$ . The magnitude of the change is proportional to the threshold at  $T_0$ .
- 4. Slope efficiency is defined as  $\Delta P_O / \Delta I_F$ .
- 5. To compute the value of Slope Efficiency at a temperature T, use the following equation:

 $\eta(T)\approx\eta(25^{0}\text{C})^{*}[1{+}({\Delta\eta}/{\Delta T})^{*}(\text{T-}25)]$ 

6. Rollover is the power at which a further current increase does not result in a power increase.


- Rise and fall times specifications are the 20% 80%. Most of the devices will measure <135ps fall time. Rise and fall times are sensitive to drive electronics.
- 8. To compute the value of Series Resistance at a temperature T, use the following equation:

 $R_{S}(T) \approx R_{S}(25^{O}C)^{*}[1 + \Delta R_{S}/\Delta T)^{*}(T-25)]$ 


 Beam divergence is defined as the total included angle between the 1/e<sup>2</sup> intensity points.

## TYPICAL PERFORMANCE CURVES

**Emitted Power vs. Current**: Power varies approximately linearly with current above threshold.




**Threshold Current vs. Temperature:** Threshold current varies parabolically with temperature; thus it can be nearly constant for a limited temperature range.




# DIE DIMENSIONS: (µm)

Dimension	4-Channel	12-Channel			
Length	1215	3215			
Width	400	400			
Height	200	200			

## **4-CHANNEL ARRAY**

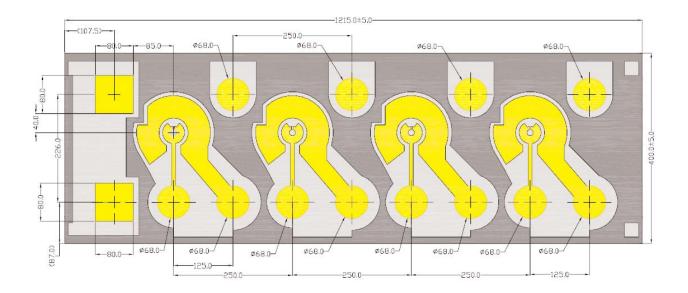

# **12-CHANNEL ARRAY**

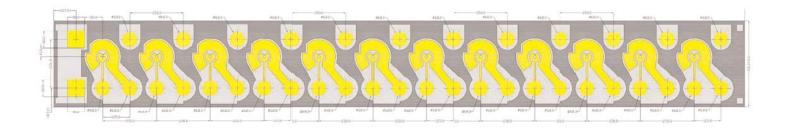

### ADVANCED OPTICAL COMPONENTS

Finisar's ADVANCED OPTICAL COMPONENTS division was formed through strategic acquisition of key optical component suppliers. The company has led the industry in high volume Vertical Cavity Surface Emitting Laser (VCSEL) and associated detector technology since 1996. VCSELs have become the primary laser source for optical data communication, and are rapidly expanding into a wide variety of sensor applications. VCSELs' superior reliability, low drive current, high coupled power, narrow and circularly symmetric beam and versatile packaging options (including arrays) are enabling solutions not possible with other optical technologies. ADVANCED OPTICAL COMPONENTS is also a key supplier of Fabrey-Perot (FP) and Distributed Feedback (DFB) Lasers, and Optical Isolators (OI) for use in single mode fiber data and telecommunications networks

### LOCATION

- Allen, TX Business unit headquarters, VCSEL wafer growth, wafer fabrication and TO package assembly.
- Fremont, CA Wafer growth and fabrication of 1310 to 1550nm FP and DFB lasers.
- Shanghai, PRC Optical passives assembly, including optical isolators and splitters.

### SALES AND SERVICE

Finisar's ADVANCED OPTICAL COMPONENTS division serves its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact a nearby sales office or call the number listed below.

### **AOC CAPABILITIES**

ADVANCED OPTICAL COMPONENTS' advanced capabilities include:

- 1, 2, 4, 8, and 10Gbps serial VCSEL solutions
- 1, 2, 4, 8, and 10Gbps serial SW DETECTOR solutions
- VCSEL and detector arrays
- 1, 2, 4, 8, and 10Gbps FP and DFB solutions at 1310 and 1550nm
- 1, 2, 4, 8, and 10Gbps serial LW DETECTOR solutions
- Optical Isolators from 1260 to 1600nm range
- Laser packaging in TO46, TO56, and Optical subassemblies with SC, LC, and MU interfaces for communication networks
- VCSELs operating at 670nm, 780nm, 980nm, and 1310nm in development
- Sensor packages include surface mount, various plastics, chip on board, chipscale packages, etc.
- Custom packaging options

Finisar Advanced Optical Components Division Phone:1-866-MY-VCSEL USA (toll free) 1-214-509-2700 USA (Direct dial) 44 (0) 174 336 5533 Europe 886-935-409898 China & Taiwan 81-90-4437-1130 Japan 82-11-220-6153 Asia Pacific & Korea

Fax: 1-214-509-3709 USA

Email: support@adopco.com WEB: www.finisar.com/aoc.php