

Technical Data Sheet Top View LEDs

67-21SUBC/S400-XX/TR8

Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.

Descriptions



• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes the SMT TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD's, switch and symbol.
- Light pipe application.
- General use.

Device Selection Guide

Chip	Emitted Color	Resin Color		
Material	Emitted Color			
InGaN	Blue	Water Clear		

Package Dimensions

Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2 LifecyclePhase:正式發行


http://www.everlight.com Prepared date: 2-3-2005 Rev. 2 Page: 1 of 9


Prepared by: Bennett Release Date:2009-03-10 20:10:11.0




Technical Data Sheet Top View LEDs

67-21SUBC/S400-XX/TR8

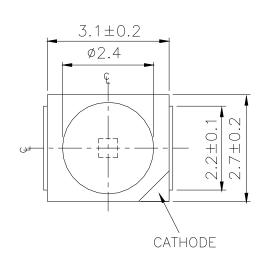




Polarity

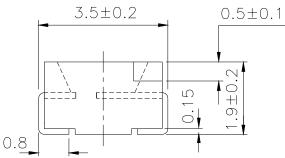

2.7±0.2	
-	Ì
└ ┌	4

For reflow soldering (Proposal)

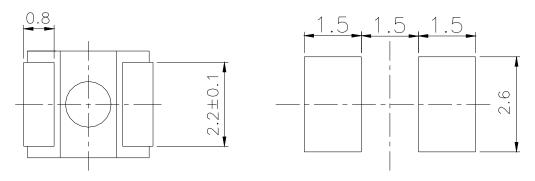

Note: .All dimensions are in millimeters, Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2 LifecyclePhase:正式發行 http://www.everlight.com Prepared date: 2-3-2005 Rev. 2 Page: 2 of 9

Prepared by: Bennett Release Date:2009-03-10 20:10:11.0



Technical Data Sheet Top View LEDs

67-21SUBC/S400-XX/TR8

Absolute Maximum Ratings (1a–25)						
Parameter	Symbol	Rating	Unit			
Reverse Voltage	V _R	5	V			
Forward Current	$I_{\rm F}$	25	mA			
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	100	mA			
Power Dissipation	Pd	110	mW			
Electrostatic Discharge	ESD	150	V			
Operating Temperature	Topr	-40 ~ +85				
Storage Temperature	Tstg	-40 ~ +90				
Soldering Temperature	Tsol	Reflow Soldering : 260 Hand Soldering : 350	for 10 sec. for 3 sec.			

Absolute Maximum Ratings (Ta=25)

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	*Chip Rank.	Min.	Тур.	Ma.	Unit	Condition
		A3	32.0	38.0		1	
		A4	42.5	48.0			
	TU	A5	53.0	58.5			
Luminous Intensity	Iv	A6	64.0	70.5		mcd	I _F =20mA
		X7	75.0	80.5			
	-	X8	88.0	100.0			
		X9	105	135			
Viewing Angle	2 1/2			120		deg	I _F =20Ma
Peak Wavelength	λp			468		nm	I _F =20mA
Dominant Wavelength	λd			470		nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ			25		nm	I _F =20mA
Forward Voltage	$V_{\rm F}$			3.5	4.3	V	I _F =20mA
Reverse Current	I _R				50	μA	V _R =5V

*67-21SUBC/S400-<u>XX</u>/TR8



Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2

http://www.everlight.com Prepared date: 2-3-2005 Rev. 2

Page: 3 of 9

Prepared by: Bennett Release Date:2009-03-10 20:10:11.0


LifecyclePhase:正式發行




Technical Data Sheet Top View LEDs


67-21SUBC/S400-XX/TR8


Typical Electro-Optical Characteristics Curves

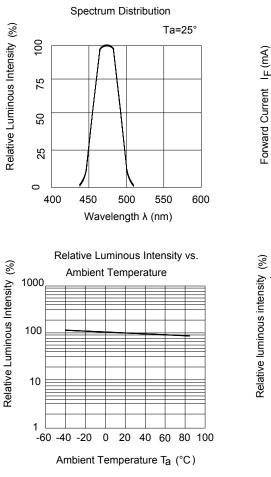





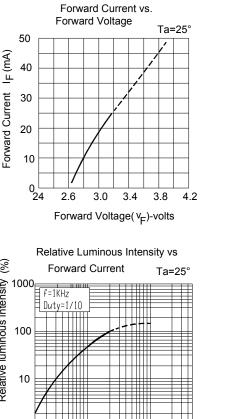




 10^{1}

2 10

1

' 0 10




Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2 LifecyclePhase:正式發行 http://www.everlight.com Prepared date: 2-3-2005 Rev. 2 Page: 4 of 9

Prepared by: Bennett Release Date:2009-03-10 20:10:11.0



Technical Data Sheet Top View LEDs

67-21SUBC/S400-XX/TR8

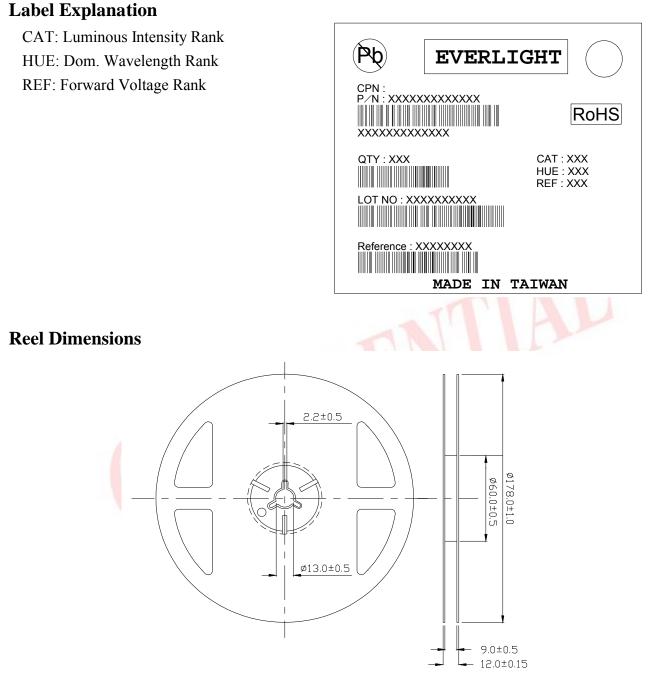

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2 LifecyclePhase:正式發行 http://www.everlight.com Prepared date: 2-3-2005 Rev. 2 Page: 5 of 9


Prepared by: Bennett Release Date:2009-03-10 20:10:11.0



Technical Data Sheet Top View LEDs

67-21SUBC/S400-XX/TR8

Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel.

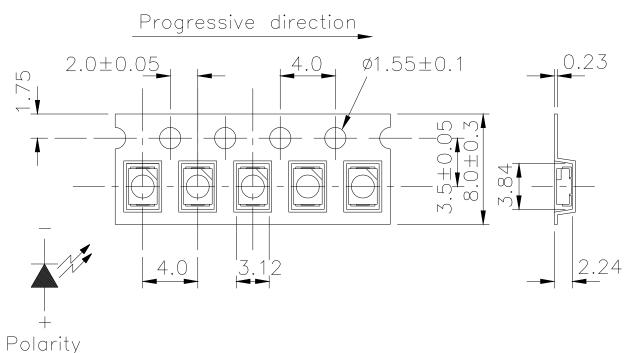


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging





Aluminum moisture-proof bag



Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2 LifecyclePhase:正式發行 http://www.everlight.com Prepared date: 2-3-2005 Rev. 2 Page: 6 of 9

Prepared by: Bennett Release Date:2009-03-10 20:10:11.0



Technical Data Sheet Top View LEDs

67-21SUBC/S400-XX/TR8

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100 15min ∫ 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100 5min $\int 10 \sec$ L:-10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1

Prepared date: 2-3-2005

Rev. 2 Page: 7 of 9

Prepared by: Bennett Release Date:2009-03-10 20:10:11.0



Technical Data Sheet Top View LEDs


67-21SUBC/S400-XX/TR8

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life are 168 hours under 30 deg C or less and 60% RH or less.If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

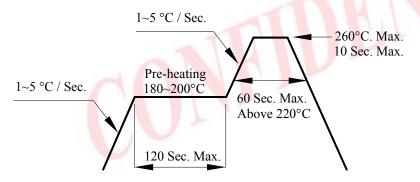

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2 LifecyclePhase:正式發行

http://www.everlight.com Rev. 2 Page: 8 of 9 Prepared date: 2-3-2005

Prepared by: Bennett Release Date:2009-03-10 20:10:11.0




Technical Data Sheet Top View LEDs

67-21SUBC/S400-XX/TR8

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

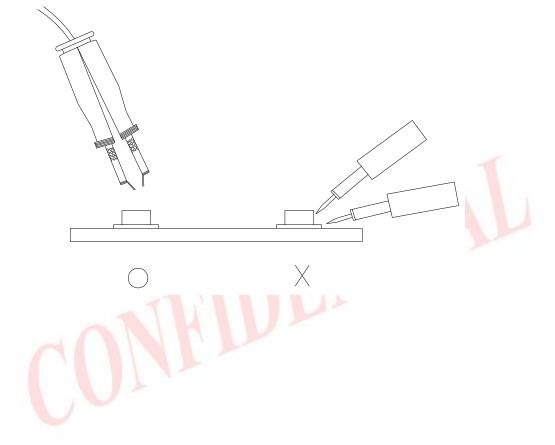

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : DSE-0000949 Revision : 2 http://www.everlight.com

Prepared date: 2-3-2005

Rev. 2 Page

Page: 9 of 9

Prepared by: Bennett Release Date:2009-03-10 20:10:11.0

LifecyclePhase:正式發行