

Features

- RoHS compliant*
- ESD protection >25 kV
- Low capacitance <0.05 pF
- Low leakage current <5 nA</p>

Applications

- HDMI 1.4
- Digital Visual Interface (DVI)
- USB 3.0 / USB OTG
- Memory protection
- SIM card ports

ChipGuard® MLU Series - ESD Protectors

General Information

The ChipGuard[®] MLU Series has been specifically designed to protect sensitive electronic components from electrostatic discharge damage. The MLU family has been designed to protect equipment to IEC61000-4-2, Level 4 (±8 kV Contact / ±15 kV Air Discharge) ESD specifications targeted for high speed USB 3.0/USB OTG, HDMI 1.4, DVI or IEEE1394 applications.

The ChipGuard[®] MLU Series has been manufactured to provide low 0.05 pF capacitance and leakage currents less than 5 nA with excellent clamp qualities, making the family almost transparent under normal working conditions.

Device Symbol



Electrical Characteristics @ 25 °C (unless otherwise noted)

		CG0402MLU / CG0603MLU (Note 3)		te 3)		
Parameter	Symbol	3.3x	05x	12x	24x	Unit
Typical Continuous Operating Voltage	V _{DC}	3.3	5	12	24	V
Typical Clamping Voltage (Note 1)	V _C	25			V	
Maximum Capacitance @ 1 VRMS 1 MHz	CO	0.05			pF	
Maximum Leakage Current @ Max. VDC	١L	5			nA	
Typical Trigger Voltage (Note 2)	VT	250		V		
Maximum ResponseTime	RT	1		ns		
ESD Protection: Per IEC 61000-4-2 Min. Contact Discharge (>1000 Reps) Min. Air Discharge (>1000 Reps)		±8 ±15		kV kV		
Operating Temperature	T _{OPR}	-40 to +125		°C		
Storage Temperature	TSTG	-55 to +150		°C		

Notes: 1. Per IEC 61000-4-2, Level 4 8 kV Contact Discharge. Measurement 30 ns after initiation of pulse.

2. Per IEC 61000-4-2, Level 4 8 kV Contact Discharge. Measurement at maximum pulse voltage.


3. Part number suffix "x" can be E for 0603 size or G for 0402 size to indicate tape & reel quantity.

ChipGuard[®] MLU Series - ESD Protectors


BOURNS

Recommended Pad Layout


Product Dimensions



Ŵ








Dimension	CG0402 Series	CG0603 Series
L	$\frac{1.00 \pm 0.15}{(0.04 \pm 0.006)}$	$\frac{1.60 \pm 0.20}{(0.064 \pm 0.008)}$
W	$\frac{0.50 \pm 0.10}{(0.02 \pm 0.004)}$	$\frac{0.80 \pm 0.20}{(0.032 \pm 0.008)}$
A	$\frac{0.36 \pm 0.05}{(0.014 \pm 0.002)}$	$\frac{0.45 \pm 0.10}{(0.018 \pm 0.004)}$
В	$\frac{0.25 \pm 0.15}{(0.10 \pm 0.006)}$	$\frac{0.30 \pm 0.20}{(0.012 \pm 0.008)}$

Dim.	CG0402 Series	CG0603 Series
А	<u>0.51</u> (0.020)	<u>0.76</u> (0.030)
В	<u>0.61</u> (0.024)	<u>1.02</u> (0.040)
С	<u>0.51</u> (0.020)	<u>0.50</u> (0.020)
D	<u>1.70</u> (0.067)	2.54 (0.100)

Solder Reflow Recommendations

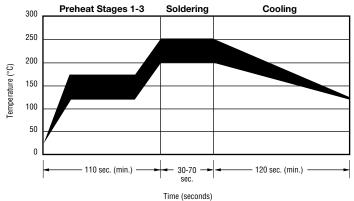

А	Stage 1 Preheat	Ambient to Preheating Temperature	30 s to 60 s
В	Stage 2 Preheat	140 °C to 160 °C	60 s to 120 s
С	Stage 3 Preheat	Preheat to 200 °C	20 s to 40 s
D	Main Heating	200 °C 210 °C 220 °C 230 °C 240 °C	60 s to 70 s 55 s to 65 s 50 s to 60 s 40 s to 50 s 30 s to 40 s
Е	Cooling	200 °C to 100 °C	1 °C/s to 4 °C/s

• This product can be damaged by rapid heating, cooling or localized heating.

• Heat shocks should be avoided. Preheating and gradual cooling recommended.


• Excessive solder can damage the device. Print solder thickness of 150 to 200 um recommended.

 Solder gun tip temperature should be kept below 280 °C and should not touch the device directly. Contact should be less than 3 seconds. A solder gun under 30 watts is recommended.

ChipGuard[®] MLU Series - ESD Protectors


BOURNS

Packaging Dimensions

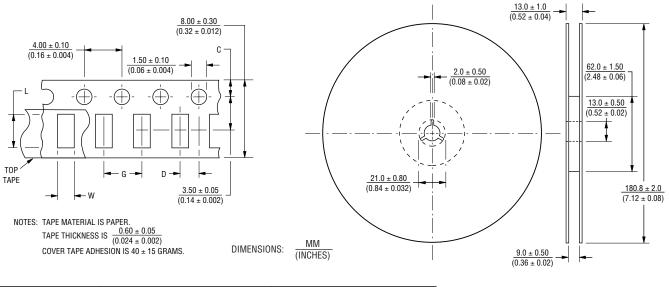

Dimension	CG0402 Series	CG0603 Series
С	$\frac{1.75 \pm 0.05}{(0.04 \pm 0.002)}$	$\frac{1.75 \pm 0.10}{(0.04 \pm 0.004)}$
D	$\frac{2.00 \pm 0.02}{(0.08 \pm 0.0008)}$	$\frac{2.00 \pm 0.05}{(0.08 \pm 0.002)}$
L	$\frac{1.12 \pm 0.03}{(0.045 \pm 0.0012)}$	$\frac{1.80 \pm 0.20}{(0.072 \pm 0.008)}$
W	$\frac{0.62 \pm 0.03}{(0.025 \pm 0.0012)}$	$\frac{0.90 \pm 0.20}{(0.036 \pm 0.008)}$
G	$\frac{2.0 \pm 0.05}{(0.08 \pm 0.002)}$	$\frac{4.0 \pm 0.05}{(0.16 \pm 0.002)}$

How to Order



REV. G 11/09



Asia-Pacific: TEL +886-2 25624117 • FAX +886-2 25624116 Europe: TEL +41-41 7685555 • FAX +41-41 7685510 The Americas: TEL +1-951 781-5500 • FAX +1-951 781-5700 www.bourns.com