



# Cree<sup>®</sup> XLamp<sup>®</sup> CXA2011 LED



#### **PRODUCT DESCRIPTION**

The Cree XLamp CXA2011 LED brings lighting-class reliability and performance to easy-to-use LED arrays. The XLamp CXA2011 expands Cree's lighting-class leadership to multi-die, high flux arrays. With XLamp lighting-class reliability, a wide viewing angle, uniform light output, and industry-leading chromaticity binning in a 16 mm diameter optical source, the XLamp CXA2011 LED continues Cree's history of segment-focused product innovation in LEDs for lighting applications.

The XLamp CXA2011 LED brings high performance and a smooth look to a wide range of lighting applications, including downlighting, recessed fixtures, can lights and retrofit bulbs.

## FEATURES

- Available in ANSI white bins as well as 4-step and 2-step EasyWhite bins at 2,700K, 3,000K, 3,500K, 4,000K, 5000K CCT
- Forward Voltage: 40 V
- 85°C binning and characterization
- NEMA SSL-3 2011 standard flux bins
- Max drive current: 1000 mA
- 120° viewing angle, uniform chromaticity profile
- Top-side solder connections
- Thermocouple attach point
- Screw down attachment
- RoHS and REACH-compliant
- Unlimited shelf life at ≤ 30°C/85% RH

#### **TABLE OF CONTENTS**

Characteristics 2
Flux Characteristics, Standard Order
Codes and Bins 2
Relative Spectral Power
Distribution4
Relative Luminous Flux vs. Junction
Temperature 4
Electrical Characteristics 5
Relative Luminous Flux vs. Current 5
Relative Chromaticity vs. Current and
Temperature 6
Typical Spatial Distribution
Performance Groups -
Brightness7
Performance Groups -
Chromaticity 8
Cree EasyWhite Bins Plotted on the
1931 CIE Color Space 9
Bin and Order Code Formats10
Cree ANSI White Bins Plotted on the
1931 CIE Color Space10
Notes11
Mechanical Dimensions11
Packaging12



## **CHARACTERISTICS**

Characteristics	Unit	Minimum	Typical	Maximum
Effective thermal resistance, junction to case	°C/W		0.4	
Viewing angle (FWHM)	degrees		120	
ESD classification (HBM per Mil-Std-883D)			Class 2	
DC forward current	mA			1,000
Reverse current	mA			0.1
Forward voltage (@ 270 mA, 85 °C)	V		40	48
LED junction temperature	°C			150
Temperature coefficient of voltage	mV/°C		-35	

# FLUX CHARACTERISTICS, STANDARD ORDER CODES AND BINS ( $I_F = 270 \text{ MA}, T_J = 85 \degree \text{C}$ )

The following tables provide order codes for XLamp CXA2011 LEDs. For a complete description of the order code nomenclature, please reference Bin and Order Code Formats (p. 10).

Color	ССТ	Min Lumine	ler Codes ous Flux @ A, 85° C	2	-Step Order Code	4-Step Order Code			
	Range	Group	Flux (lm)	Chromaticity Region		Chromaticity Region			
	5000K	H0	900	50H	CXA2011-0000-000P00H050H	50F	CXA2011-0000-000P00H050F		
	5000K	JO	1040	JUH	CXA2011-0000-000P00J050H	SUF	CXA2011-0000-000P00J050F		
	4000K	G0	780	40H	CXA2011-0000-000P00G040H	40F	CXA2011-0000-000P00G040F		
	4000K	H0	900	4011	CXA2011-0000-000P00H040H	401	CXA2011-0000-000P00H040F		
EasyWhite	3500K	G0	780	35H	CXA2011-0000-000P00G035H	35F	CXA2011-0000-000P00G035F		
Lasywhite		H0	900	5511	CXA2011-0000-000P00H035H	221	CXA2011-0000-000P00H035F		
	3000K	G0	780	30H	CXA2011-0000-000P00G030H	30F	CXA2011-0000-000P00G030F		
	JUUUK	H0	900	5011	CXA2011-0000-000P00H030H	50F	CXA2011-0000-000P00H030F		
	2700K	F0	680	27H	CXA2011-0000-000P00F027H	27F	CXA2011-0000-000P00F027F		
	2700K	G0	780	27П	CXA2011-0000-000P00G027H	275	CXA2011-0000-000P00G027F		

Notes:

- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements and a tolerance of  $\pm 2$  on CRI measurements.
- Minimum CRI for chromaticity kits 27F, 27H, 30F, 30H is 80.
- Minimum CRI for chromaticity kits 35F, 35H is 77 and typical CRI is 80.
- Minimum CRI for chromaticity kits 40F, 40H, 50F, 50H is 70 and typical CRI is 75.

Color	CCT Range	Min Lumino	der Codes ous Flux (Im) mA, 85°C	Chromaticity Regions	Order Code	
		Group	Flux (lm)			
	5000K	H0	900	240 280 200 200	CXA2011-0000-000P00H00E3	
	5000K	JO	1040	3A0, 3B0, 3C0, 3D0	CXA2011-0000-000P00J00E3	
	4000K	G0	780	5A0, 5B0, 5C0, 5D0	CXA2011-0000-000P00G00E5	
		H0	900	5AU, 5BU, 5CU, 5DU	CXA2011-0000-000P00H00E5	
ANSI White	3500К 3000К	G0	780		CXA2011-0000-000P00G00E6	
ANSI WIITE		H0	900	6A0, 6B0, 6C0, 6D0	CXA2011-0000-000P00H00E6	
		G0	780	7A0, 7B0, 7C0, 7D0	CXA2011-0000-000P00G00E7	
		H0	900	7A0, 7B0, 7C0, 7D0	CXA2011-0000-000P00H00E7	
	27004	FO	680	840 880 8C0 8D0	CXA2011-0000-000P00F00E8	
	2700K	G0	780	8A0, 8B0, 8C0, 8D0	CXA2011-0000-000P00G00E8	

Notes:


- Cree maintains a tolerance of  $\pm 7\%$  on flux and power measurements and a tolerance of  $\pm 2$  on CRI measurements.
- Minimum CRI for chromaticity kits 0E8, 0E7 is 80.
- Minimum CRI for chromaticity kit 0E6 is 77 and typical CRI for is 80.
- Minimum CRI for chromaticity kits 0E5, 0E3 is 70 and typical CRI is 75.






# **RELATIVE SPECTRAL POWER DISTRIBUTION (I<sub>F</sub>=270 MA, T<sub>J</sub>=85°C)**

The following graph represents typical spectral emission of the XLamp CXA2011 LED.

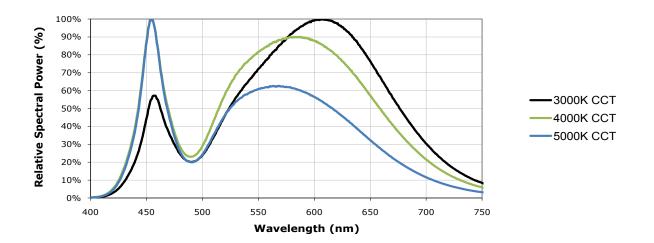

## **RELATIVE LUMINOUS FLUX VS. JUNCTION TEMPERATURE (I<sub>F</sub>=270 MA)**


The following graph represents typical performance of the XLamp CXA2011 LED.

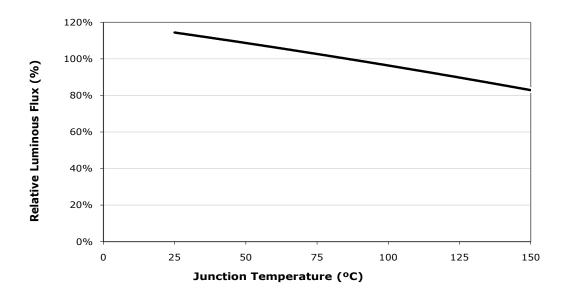




## **ELECTRICAL CHARACTERISTICS (T, =85°C)**

The following graph represents typical electrical characteristics of the XLamp CXA2011 LED.

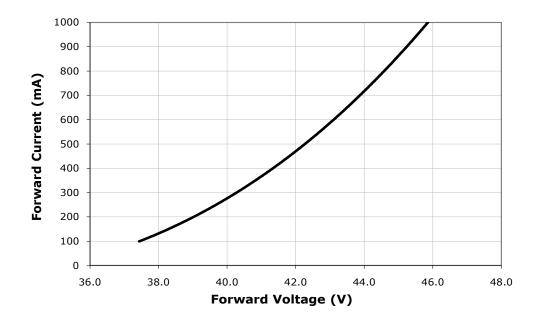

# **RELATIVE LUMINOUS FLUX VS. CURRENT (T<sub>1</sub>=85°C)**

The following graph represents typical performance of the XLamp CXA2011 LED.

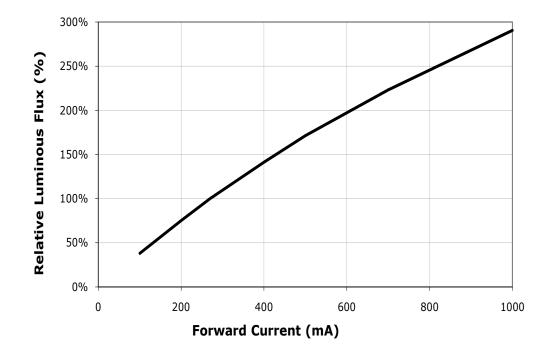







## **RELATIVE CHROMATICITY VS. CURRENT AND TEMPERATURE**

The following graphs represent typical chromaticity vs current and temperature for the XLamp CXA2011 at **3000K** CCT

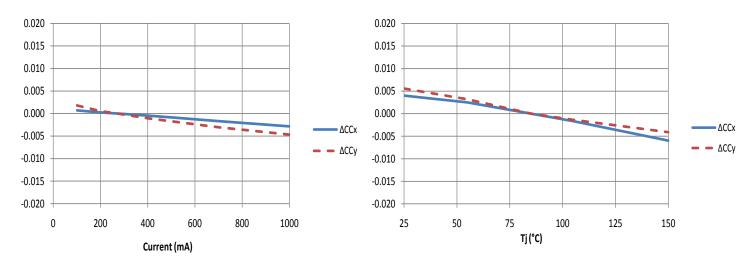


The following graphs represent typical chromaticity vs current and temperature for the XLamp CXA2011 at 5000K CCT

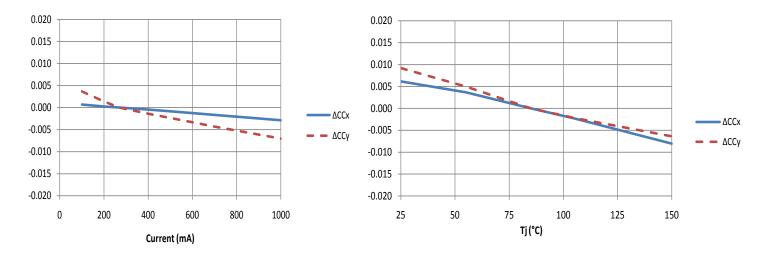



## **TYPICAL SPATIAL DISTRIBUTION**

The following graph represents the typical spatial distribution of the XLamp CXA2011 LED.

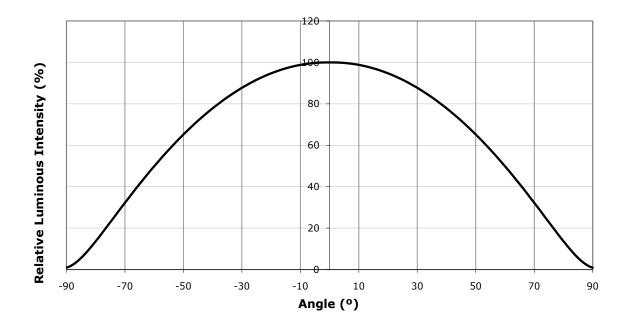

# **PERFORMANCE GROUPS - BRIGHTNESS** ( $I_F = 270 \text{ MA}, T_J = 85^{\circ}\text{C}$ )

XLamp CXA2011 LEDs are tested for luminous flux and placed into one of the following bins.

Group Code	Min. Luminous Flux @ 270 mA, T <sub>j</sub> =85°C	Max. Luminous Flux @ 270 mA, T <sub>j</sub> =85°C		
EO	590	680		
FO	680	780		
G0	780	900		
HO	900	1040		
JO	1040	1200		
K0	1200	1380		



# **PERFORMANCE GROUPS - CHROMATICITY (T<sub>1</sub>=85°C)**

XLamp CXA2011 LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

EasyWhi	EasyWhite Color Temperatures – 4-Step									
Code	ССТ	x	у							
		0.3407	0.3459							
FOF	50001/	0.3415	0.3586							
50F	5000K	0.3499	0.3654							
		0.3484	0.3521							
		0.3744	0.3685							
40F	4000K	0.3782	0.3837							
406	4000K	0.3912	0.3917							
		0.3863	0.3758							
	3500K	0.3981	0.3800							
35F		0.4040	0.3966							
225		0.4186	0.4037							
		0.4116	0.3865							
		0.4242	0.3919							
30F	3000K	0.4322	0.4096							
305	3000K	0.4449	0.4141							
		0.4359	0.3960							
		0.4475	0.3994							
27F	2700K	0.4573	0.4178							
275	2700K	0.4695	0.4207							
		0.4586	0.4060							


EasyWhite Color Temperatures – 2-Step									
Code	ССТ	x	у						
		0.3429	0.3507						
50H	50001/	0.3434	0.3571						
JUL	5000K	0.3475	0.3604						
		0.3469	0.3539						
		0.3784	0.3741						
40H	4000K	0.3804	0.3818						
4011	4000K	0.3867	0.3857						
		0.3844	0.3778						
	3500K	0.4030	0.3857						
35H		0.4061	0.3941						
5511		0.4132	0.3976						
		0.4099	0.3890						
		0.4291	0.3973						
30H	3000K	0.4333	0.4062						
201	2000K	0.4395	0.4084						
		0.4351	0.3994						
		0.4528	0.4046						
27H	2700K	0.4578	0.4138						
2/П	2700K	0.4638	0.4152						
		0.4586	0.4060						

	ANSI White Bins					ANSI White Bins				ANSI White Bins					
Code	ССТ	Bin Code	x	У	Code	ССТ	Bin Code	x	У	Code	ССТ	Bin Code	x	У	
			.3371	.3490	490			.3670	.3578			6A0	.3889	.3690	
		3A0	.3451	.3554			5A0	.3702	.3722				.3941	.3848	
		SAU	.3440	.3427			JAU	.3825	.3798			UAU	.4080	.3916	
			.3366	.3369				.3783	.3646				.4017	.3751	
			.3376	.3616			5B0	.3702	.3722			6B0	.3941	.3848	
		3B0 0K	.3463	.3687	055	4000K		.3736	.3874				.3996	.4015	
			.3451	.3554				.3869	.3958				.4146	.4089	
050	50001/		.3371	.3490				.3825	.3798	056	25001		.4080	.3916	
0E3	5000K		.3463	.3687	0E5			.3825	.3798	0E6	3500K	6C0	.4080	.3916	
		3C0	.3551	.3760				.3869	.3958				.4146	.4089	
		300	.3533	.3620			5C0	.4006	.4044				.4299	.4165	
			.3451	.3554				.3950	.3875				.4221	.3984	
			.3451	.3554				.3783	.3646				.4017	.3751	
		200	.3533	.3620			500	.3825	.3798			(D0	.4080	.3916	
		3D0	.3515	.3487			5D0	.3950	.3875			6D0	.4221	.3984	
				.3440	.3427				.3898	.3716				.4147	.3814




	ANS	White B	ins				ANS	I White I	Bins		
Code	ССТ	Bin Code	x	У		Code	ССТ	Bin Code	×	у	
			.4147	.3814					.4373	.3893	
		7A0	.4221	.3984				8A0	.4465	.4071	
		740	.4342	.4028				6AU	.4582	.4099	
			.4259	.3853					.4483	.3919	
			.4221	.3984				8B0	.4465	.4071	
		780	.4299	.4165					.4562	.4260	
			.4430	.4212		050	27004		.4687	.4289	
057			.4342	.4028					.4582	.4099	
0E7	3000K		.4342	.4028		0E8	2700K		.4582	.4099	
		7C0	.4430	.4212				000	.4687	.4289	
			700	700	700	700	.4562 .4260			8C0	.4813
			.4465	.4071					.4700	.4126	
			.4259	.3853					.4483	.3919	
		75.0	.4342	.4028					.4582	.4099	
		7D0	.4465	.4071				8D0	.4700	.4126	
			.4373	.3893					.4593	.3944	

# CREE EASYWHITE BINS PLOTTED ON THE 1931 CIE COLOR SPACE ( $T_1$ =85°C)

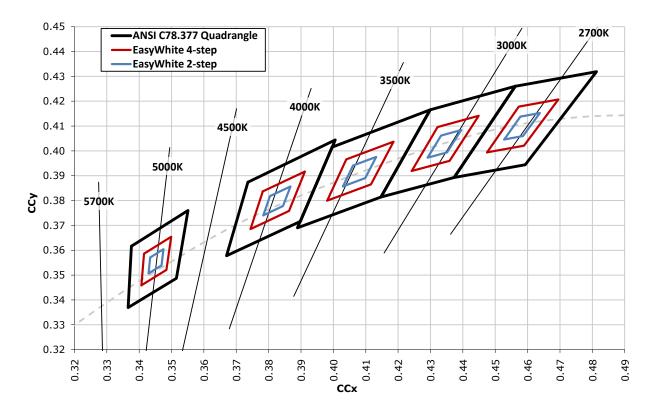

Copyright © 2011 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree, the Cree logo and XLamp are registered trademarks of Cree, Inc.




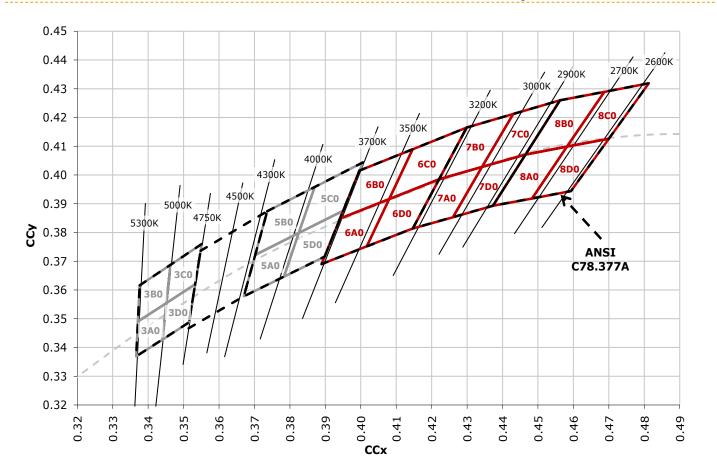

# CREE ANSI WHITE BINS PLOTTED ON THE 1931 CIE COLOR SPACE (T<sub>1</sub>=85°C)

## **BIN AND ORDER CODE FORMATS**

Bin codes and order codes are configured as follows:

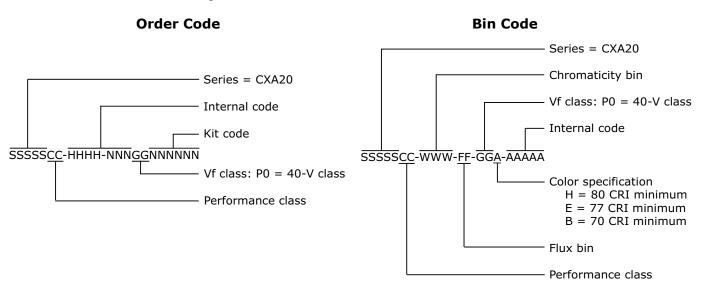



### NOTES

#### **Lumen Maintenance Projections**

Please read the XLamp Long-Term Lumen Maintenance application note for more details on Cree's lumen maintenance testing and forecasting. Please read the XLamp Thermal Management application note for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.


## **RoHS Compliance**

The levels of environmentally sensitive, persistent biologically toxic (PBT), persistent organic pollutants (POP), or otherwise restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2002/95/ EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), as amended through April 21, 2006.

### **Vision Advisory Claim**

Users should be cautioned not to stare at the light of this LED product. The bright light can damage the eye.



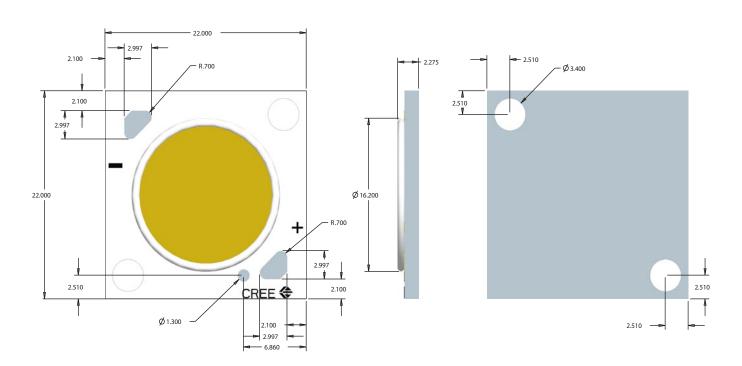


All measurements are ±.13 mm unless otherwise indicated.





## PACKAGING

Cree CXA2011 LEDs are packaged in tubes of 20, which are then combined in boxes of 5 tubes, or 100 LEDs. Boxes of 100 LEDs are of the same performance bin.

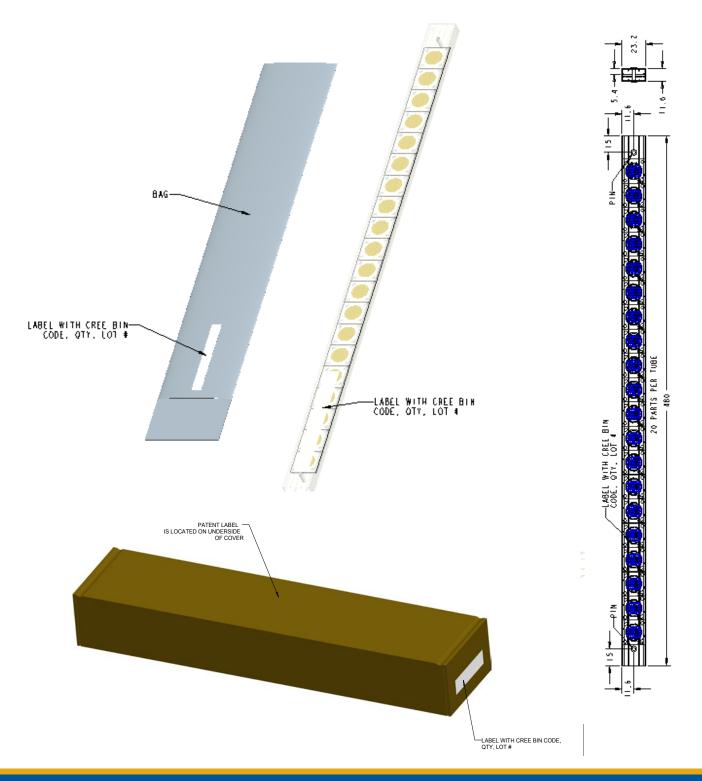

Copyright © 2011 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree, the Cree logo and XLamp are registered trademarks of Cree, Inc.