ULTRA LOW CAPACITANCE STEERING DIODE/TVS ARRAY



DESCRIPTION

The PLR0502 is an ultra low capacitance (0.6pF) steering diode and TVS array combo. This device provides circuit protection for interfaces and wireless bus applications and portable electronics. The PLR0502 is ideally suited to protect USB data I/O ports against the effects of ESD and EFT.

The PLR0502 meets the requirements of IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT). At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. The PLR0502 offers a ultra low capacitance and low leakage current in a SOT-543 package.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 24A, 8/20μs Level 2(Line-Gnd) & Level 3(Line-Line)
- 200 Watts Peak Pulse Power per Line (tp = 8/20µs)
- ESD Protection > 25 kilovolts
- · Low Clamping Voltage
- Unidirectional Configuration
- Protects 2 I/O Ports and Power Supply
- Ultra Low Capacitance: 0.6pF
- · RoHS Compliant
- REACH Compliant

APPLICATIONS


- Ethernet 10/100 Base T
- FireWire
- Wireless Communications
- USB Interfaces

MECHANICAL CHARACTERISTICS

- Molded JEDEC SOT-543 Package
- Approximate Weight: 3 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
 - Pure-Tin Sn, 100: 260-270°C
- Flammability Rating UL 94V-0

• 8mm Tape and Reel Per EIA Standard 481

PIN CONFIGURATION




TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified							
PARAMETER SYMBOL VALUE UN							
Operating Temperature	T _L	-55 to 150	°C				
Storage Temperature	T _{stg}	-55 to 150	°C				
Peak Pulse Power (tp = 8/20μs) - See Figure 1	P _{pp}	200	Watts				
Peak Forward Voltage - $I_F = 1A$, $8/20\mu s$	V _F	1.5	Volts				


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (Fig. 2) (Note 2)	MAXIMUM CLAMPING VOLTAGE (Fig. 2) (Note 2)	MAXIMUM LEAKAGE CURRENT	MAXIMUM CAPACITANCE (Per Data Line) (Fig. 5) (Note 1)
		V _{wM} VOLTS	@1mA V _(BR) VOLTS	@I _p = 1A V _c VOLTS	@ 8/20μs V _c @ Ι _{ΡΡ}	@V _{wм} Ι _D μΑ	@0V, 1MHz C _{J(SD)} pF
PLR0502	B5	5.0	6.0	9.8	20.0V @ 10.0A	1	0.6


NOTE


- 1. As shown in Figure 5, REF 1 is connected to ground, REF 2 is connected to $+V_{cc}$ and input applies to $V_{cc} = 5V$, $V_{SIGN} = 30$ mV, F = 1MHz.
- 2. Measured across pin 1 to pin 4.

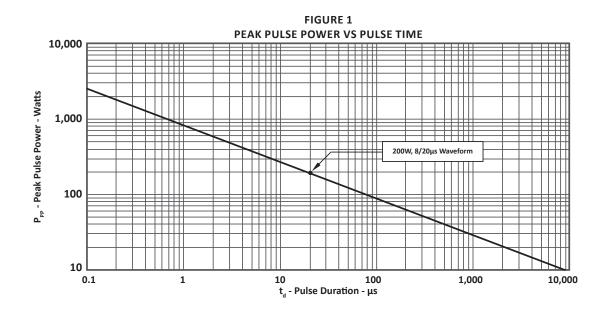

TYPICAL DEVICE CHARACTERISTICS

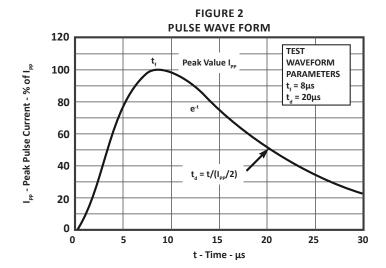

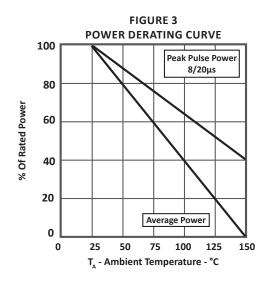


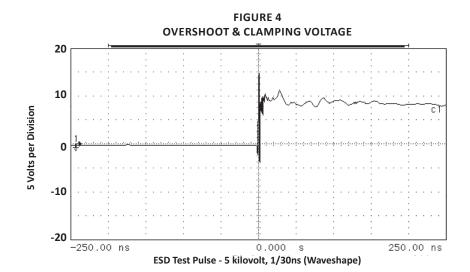




SOT-543 PACKAGE INFORMATION

OUTLINE DIMENSIONS							
DIM	MILLIM	IETERS	INCHES				
	MIN	MAX	MIN	MAX			
Α	1.50	1.70	0.059	0.067			
В	1.10 1.30		0.043	0.051			
С	0.50 0.60		0.020	0.024			
D	0.17 0.27		0.007	0.011			
G	0.50	BSC	0.020) BSC			
J	0.08	0.18	0.003	0.007			
К	0.10 0.30		0.004	0.012			
S	1.50	1.70	0.059	0.067			
R	0.05 0.15		0.002	0.006			






NOTES


- 1. Controlling dimension: inches.
- 2. Dimensioning and tolerances per ANSI Y14.5M, 1985.
- 3. Dimensions are exclusive of mold flash and metal burrs.
- 4. Do not connect center stub.

PAD LAYOUT DIMENSIONS						
DIM	MILLIMETERS	INCHES				
DIM	NOMINAL	NOMINAL				
А	1.02	0.040				
В	1.20	0.048				
С	0.30	0.012				
D	0.51	0.020				
NOTES						

1. Controlling dimension: inches.



TAPE AND REEL

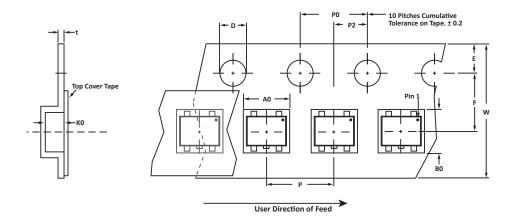

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	КО	D	E	F	W	P0	P2	Р	tmax
178mm (7")	8mm	1.78 ± 0.05	1.78 ± 0.05	0.69 ± 0.05	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T7 = 7" Reel 3,000 pieces per 8mm tape.
- 4. Marking on Part marking code (see page 2).

Package outline, pad layout and tape specifications per document number 06074.R3 3/11.

ORDERING INFORMATION							
BASE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE QTY							
PLR0502	-LF	-Т7	3,000	7"	n/a		



COMPANY INFORMATION

COMPANY PROFILE

ProTek Devices, based in Tempe, Arizona USA, is a manufacturer of Transient Voltage Suppression (TVS) products designed specifically for the protection of electronic systems from the effects of lightning, Electrostatic Discharge (ESD), Nuclear Electromagnetic Pulse (NEMP), inductive switching and EMI/RFI. With over 25 years of engineering and manufacturing experience, ProTek designs TVS devices that provide application specific protection solutions for all electronic equipment/systems.

ProTek Devices Analog Products Division, also manufactures analog interface, control, RF and power management products.

CONTACT US

Corporate Headquarters

2929 South Fair Lane Tempe, Arizona 85282 USA

By Telephone

General: 602-431-8101 Sales: 602-414-5109

Customer Service: 602-414-5114

By Fax

General: 602-431-2288

By E-mail:

Sales: sales@protekdevices.com

Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

Web

www.protekdevices.com www.protekanalog.com

COPYRIGHT © ProTek Devices 2007 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.