ULTRA LOW CAPACITANCE TVS ARRAY



DESCRIPTION

The PLR0521 is an ultra low capacitance transient voltage suppressor array, designed to protect computing applications from the damaging effects of Electrostatic Discharge and Electrical Fast Transients.

The PLR0521 meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This device offers an ultra low capacitance and low leakage current in a miniature DFN-2-0402 package.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT)
- Compatible with IEC 61000-4-5 (Surge)
- 80 Watts Peak Pulse Power per Line (tp = 8/20μs)
- ESD Protection
- Low Clamping Voltage
- · Protects One Bidirectional Line
- Ultra Low Capacitance: 0.4 pF (Typical)
- · RoHS Compliant
- REACH Compliant

MECHANICAL CHARACTERISTICS

- Molded JEDEC DFN-2-0402 Package
- Approximate Weight: 2 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
 - Pure-Tin Sn, 100: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

APPLICATIONS

- Ethernet 10/100/1000 Base T
- FireWire
- Wireless Communications
- USB Interface

PIN CONFIGURATION





TYPICAL DEVICE CHARACTERISTICS

| MAXIMUM RATINGS @ 25°C Unless Otherwise Specified | | | | | | | |
|---|------------------|------------|-------|--|--|--|--|
| PARAMETER | SYMBOL | VALUE | UNITS | | | | |
| Peak Pulse Power (tp = 8/20μs) - See Figure 1 | P _{pp} | 80 | Watts | | | | |
| Operating Temperature | T _A | -55 to 150 | °C | | | | |
| Storage Temperature | T _{stg} | -55 to 150 | °C | | | | |

| ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified | | | | | | | | | |
|---|-------------------|--|---|--|--|---|-----------------------------------|--|--|
| PART NUMBER | DEVICE MARKING | RATED STAND-OFF VOLTAGE V _{wm} | MINIMUM BREAKDOWN VOLTAGE @ 1mA V _(BR) | MAXIMUM CLAMPING VOLTAGE (Fig. 2) @Ip = 1A Vc | MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 8/20μS V _c @ I _{pp} | MAXIMUM LEAKAGE CURRENT @V _{wm} I _D | TYPICAL CAPACITANCE @0V, 1MHz C, | | |
| | | VOLTS | VOLTS | VOLTS | | μΑ | pF | | |
| PLR0521 | Н | 5.0 | 6.0 | 14.0 | 20.0V @ 4.0A | 1 | 0.4 | | |

TYPICAL DEVICE CHARACTERISTICS

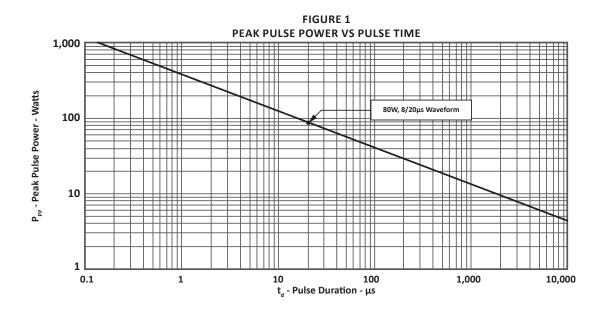

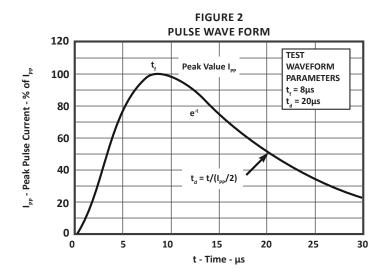






DFN-2-0402 PACKAGE INFORMATION

| OUTLINE DIMENSIONS | | | | | | | |
|--------------------|-----------|--------|---------|---------|--|--|--|
| DIM | MILLIN | IETERS | INCHES | | | | |
| | MIN | MAX | MIN | MAX | | | |
| А | 0.90 | 1.05 | 0.035 | 0.041 | | | |
| В | 0.51 | 0.65 | 0.02 | 0.024 | | | |
| С | 0.51 | 0.60 | 0.02 | 0.024 | | | |
| Н | 0~0.10 | 0~0.10 | 0~0.004 | 0~0.004 | | | |
| L1 | 0.45 | 0.55 | 0.018 | 0.022 | | | |
| L2 | 0.18 0.30 | | 0.007 | 0.012 | | | |
| L4 | 0.65 | BSC | 0.026 | 5 BSC | | | |

NOTES


- 1. Dimensioning and tolerances per ANSI Y14.M, 1985.
- 2. Controlling dimension: inches.
- 3. Dimensions are exclusive of mold flash and metal burrs.

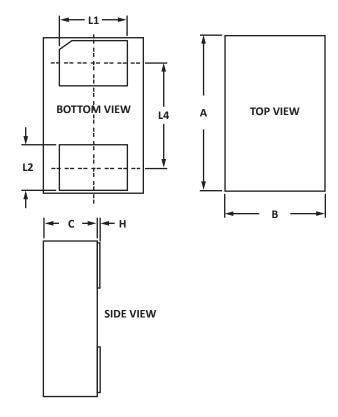


| PAD LAYOUT DIMENSIONS | | | | | | | |
|-----------------------|--------|--------|--------|-------|--|--|--|
| DINA | MILLIN | IETERS | INCHES | | | | |
| DIM | | MAX | MIN | MAX | | | |
| Α | 1.30 | 1.50 | 0.051 | 0.059 | | | |
| В | 0.60 | 0.70 | 0.024 | 0.028 | | | |
| С | 0.40 | 0.55 | 0.016 | 0.022 | | | |
| NOTES | | | | | | | |

NOTES

1. Controlling dimension: inches.



TAPE AND REEL

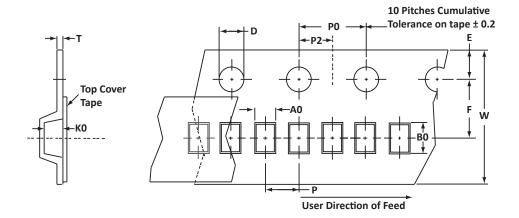

| SPECIFICATIONS | | | | | | | | | | | | |
|----------------|---------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------|
| REEL DIA. | TAPE WIDTH | A0 | В0 | ко | D | E | F | w | P0 | P2 | Р | tmax |
| 178mm (7") | 8mm | 0.70 ± 0.05 | 1.15 ± 0.10 | 0.56 ± 0.05 | 1.55 ± 0.10 | 1.75 ± 0.10 | 3.50 ± 0.05 | 8.00 ± 0.30 | 4.00 ± 0.10 | 2.00 ± 0.05 | 2.00 ± 0.05 | 0.25 |

NOTES

- 1. Dimensions are in millimeters.
- 2. Surface mount product is taped and reeled in accordance with EIA-481.
- 3. Suffix T710 = 7" Reel 10,000 pieces per 8mm tape.
- 4. Marking on Part marking code (see page 2).

Package outline, pad layout and tape specifications per document number 06094.R1 3/11 - Option 2.

| ORDERING INFORMATION | | | | | | | |
|---|-----|-------|--------|----|-----|--|--|
| BASE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE QT | | | | | | | |
| PLR0521 | n/a | -T710 | 10,000 | 7" | n/a | | |



COMPANY INFORMATION

COMPANY PROFILE

ProTek Devices, based in Tempe, Arizona USA, is a manufacturer of Transient Voltage Suppression (TVS) products designed specifically for the protection of electronic systems from the effects of lightning, Electrostatic Discharge (ESD), Nuclear Electromagnetic Pulse (NEMP), inductive switching and EMI/RFI. With over 25 years of engineering and manufacturing experience, ProTek designs TVS devices that provide application specific protection solutions for all electronic equipment/systems.

ProTek Devices Analog Products Division, also manufactures analog interface, control, RF and power management products.

CONTACT US

Corporate Headquarters

2929 South Fair Lane Tempe, Arizona 85282 USA

By Telephone

General: 602-431-8101 Sales: 602-414-5109

Customer Service: 602-414-5114

By Fax

General: 602-431-2288

By E-mail:

Sales: sales@protekdevices.com

Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

Web

www.protekdevices.com www.protekanalog.com

COPYRIGHT © ProTek Devices 2011 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.