

# **SAW Components**

SAW RF filter GPS

Series/type: B3528

Ordering code: B39162B3528U510

Date: March 22, 2011

Version: 2.2

© EPCOS AG 2011. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



SAW Components B3528


SAW RF filter 1575.42 MHz

**Data sheet** 




### **Application**

- Low-loss RF filter for GPS applications
- Impedance transformation from 50  $\Omega$  to 100  $\Omega$
- Unbalanced to balanced operation
- Very low insertion attenuation
- Low amplitude ripple
- Usable passband 2.0 MHz




### **Features**

- Package size 3.0 x 3.0 x 1.1 mm<sup>3</sup>
- Package code DCC6D
- RoHS compatible
- Approximate weight 0.037 g
- Package for Surface Mount Technology (SMT)
- Ni, gold-plated terminals
- Lead free soldering compatible with J STD20C
- AEC-Q200 qualified component family
- Electrostatic Sensitive Device (ESD)

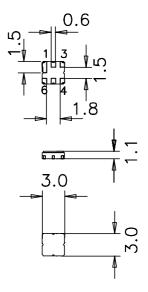

## Pin configuration

- 2 Input unbalanced
- 4,6 Output balanced
- 1,3,5 Case ground (to be grounded)

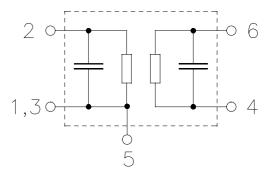



SAW Components

B3528

SAW RF filter 1575.42 MHz

**Data sheet** 

### **Characteristics**

Temperature range for specification:  $T = -40 \,^{\circ}\text{C}$  to +85  $^{\circ}\text{C}$ 

Terminating source impedance:  $Z_S = 50 \Omega$ 

Terminating load impedance:  $Z_L = 100 \Omega$  (balanced)

			min.	typ. @ 25 °C	max.	
Center frequency		f <sub>C</sub>	_	1575.42	_	MHz
Maximum insertion attenuation						
	1574.42 1576.42	MHz	_	1.2	1.9	dB
Amplitude ripple (p-p)		$\Delta \alpha$				
	1574.42 1576.42	MHz	_	0.2	0.6	dB
VSWR						
Input	1574.42 1576.42	MHz	_	1.3	1.7	
Output	1574.42 1576.42	MHz	_	1.3	1.7	
Attenuation		α				
, titoridatiori		MHz	50	60	_	dB
	960.0 1475.0	MHz	45	52	_	dB
	1475.0 1515.0	MHz	36	43	_	dB
	1515.0 1525.42	MHz	25	36	_	dB
	1625.0 1635.0	MHz	25	36		dB
	1635.0 1675.0	MHz	36	45	_	dB
	1675.0 1850.0	MHz	45	55	_	dB
	1850.0 2400.0	MHz	40	45	_	dB



# SAW Components B3528

SAW RF filter 1575.42 MHz

**Data sheet** 



# **Maximum ratings**

Operable temperature range	Т	-45/+125	°C	
Storage temperature range	$T_{stg}$	-45/+125	°C	
DC voltage	$V_{DC}$	3	V	
ESD voltage	$V_{ESD}$	50 <sup>1)</sup>	V	machine model, 10 pulses
Input power at				source $50\Omega$ , load $100\Omega$
1574.42 1576.42 MHz	$P_{IN}$	5	dBm	cw
2400 2483.5 MHz	$P_{IN}$	20	dBm	cw
824960, 17102170 MHz	$P_{IN}$	25	dBm	cw
9601525 MHz	$P_{IN}$	10	dBm	cw

<sup>1)</sup> acc. to JESD22-A115A (machine model), 10 negative & 10 positive pulses.




SAW Components B3528


SAW RF filter 1575.42 MHz

Data sheet

### **Transfer function**

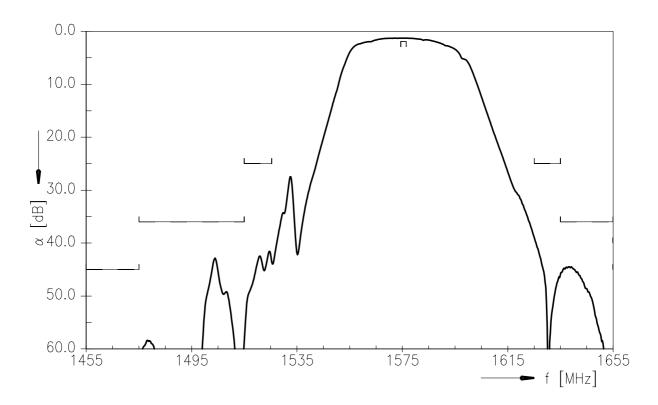

### Transfer function (wideband)

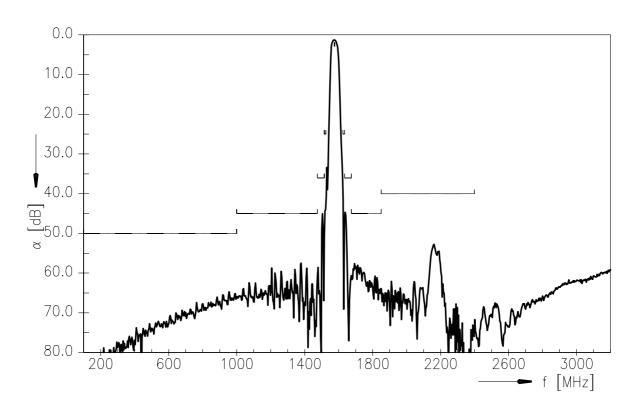



SAW Components B3528
SAW RF filter 1575.42 MHz

**Data sheet** 



### References

Туре	B3528			
Ordering code	B39162B3528U510			
Marking and package	C61157-A7-A68			
Packaging	F61074-V8228-Z000			
Date codes	L_1126			
S-parameters	B3528_NB.s3p, B3528_WB.s3p see file header for port/pin assignment table.			
Soldering profile	S_6001			
RoHS compatible	defined as compatible with the following documents:  "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."			
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.			
Matching coils	See Inductor pdf-catalog <a href="http://www.tdk.co.jp/tefe02/coil.htm#aname1">http://www.tdk.co.jp/tefe02/coil.htm#aname1</a> and Data Library for circuit simulation <a href="http://www.tdk.co.jp/etvcl/index.htm">http://www.tdk.co.jp/etvcl/index.htm</a>			

For further information please contact your local EPCOS sales office or visit our webpage at  $\underline{www.epcos.com}$  .

Published by EPCOS AG Systems, Acoustics, Waves Business Group P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2011. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



The following applies to all products named in this publication:

- Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.

from the foregoing for customer-specific products.

- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating
- 6. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.