
## ULTRA LOW CAPACITANCE TVS ARRAY



# DESCRIPTION

The PLR0521 is an ultra low capacitance transient voltage suppressor array, designed to protect computing applications from the damaging effects of Electrostatic Discharge and Electrical Fast Transients.

The PLR0521 meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This device offers an ultra low capacitance and low leakage current in a miniature DFN-2-0402 package.

APPLICATIONS

• FireWire

USB Interface

• Ethernet 10/100/1000 Base T

• Wireless Communications

## FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air 15kV, Contact 8kV
- Compatible with IEC 61000-4-4 (EFT)
- Compatible with IEC 61000-4-5 (Surge)
- 80 Watts Peak Pulse Power per Line (tp = 8/20μs)
- ESD Protection
- Low Clamping Voltage
- Protects One Bidirectional Line
- Ultra Low Capacitance: 0.4 pF (Typical)
- RoHS Compliant
- REACH Compliant

# **MECHANICAL CHARACTERISTICS**

- Molded JEDEC DFN-2-0402 Package
- Approximate Weight: 2 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
- Pure-Tin Sn, 100: 260-270°C • 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

# **PIN CONFIGURATION**




# TYPICAL DEVICE CHARACTERISTICS


05338

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified								
PARAMETER SYMBOL VALUE								
Peak Pulse Power (tp = 8/20μs) - See Figure 1	P <sub>pp</sub>	80	Watts					
Operating Temperature	T <sub>A</sub>	-55 to 150	°C					
Storage Temperature	T <sub>stg</sub>	-55 to 150	°C					

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified									
PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (Fig. 2)	MAXIMUM CLAMPING VOLTAGE (Fig. 2)	MAXIMUM LEAKAGE CURRENT	TYPICAL CAPACITANCE		
		V <sub>wm</sub> VOLTS	@ 1mA V <sub>(BR)</sub> VOLTS	@I <sub>p</sub> = 1A V <sub>c</sub> VOLTS	@ 8/20μS V <sub>c</sub> @ Ι <sub>pp</sub>	@V <sub>wM</sub> Ι <sub>D</sub> μΑ	00V, 1MHz C <sub>ی</sub> pF		
PLR0521	Н	5.0	6.0	14.0	20.0V @ 4.0A	1	0.4		

# **TYPICAL DEVICE CHARACTERISTICS**

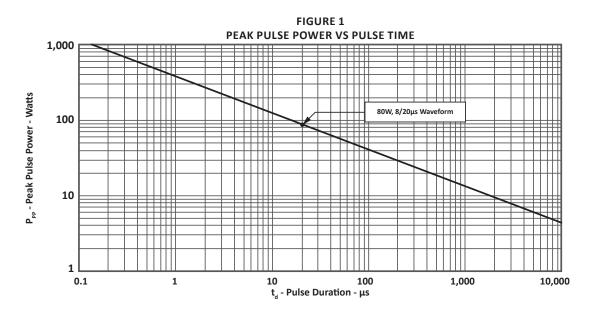

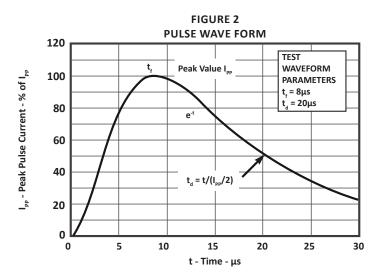

# **DFN-2-0402 PACKAGE INFORMATION**

OUTLINE DIMENSIONS								
DIM	MILLIN	IETERS	INCHES					
	MIN	MAX	MIN	MAX				
А	0.90	1.05	0.035	0.041				
В	0.51	0.65	0.02	0.024				
С	0.51	0.60	0.02	0.024				
н	0~0.10	0~0.10	0~0.004	0~0.004				
L1	0.45	0.55	0.018	0.022				
L2	0.18 0.30		0.007	0.012				
L4	0.65	BSC	0.02	5 BSC				


NOTES

05338


1. Dimensioning and tolerances per ANSI Y14.M, 1985.

2. Controlling dimension: inches.

3. Dimensions are exclusive of mold flash and metal burrs.

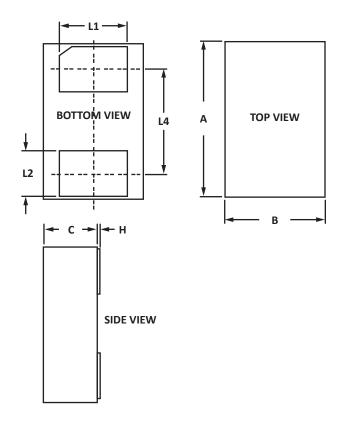


PAD LAYOUT DIMENSIONS								
DIM	MILLIN	IETERS	INCHES					
DIM	MIN	MAX	MIN	MAX				
А	1.30	1.50	0.051	0.059				
В	0.60	0.70	0.024	0.028				
C 0.40 0.55 0.016 0.022								
NOTES 1. Controlling dimension: inches.								



## TAPE AND REEL

05338

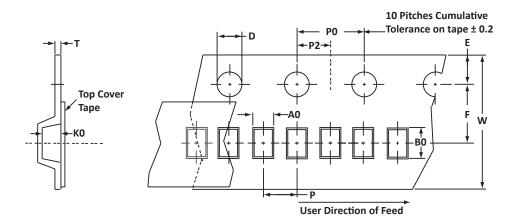

SPECIFICATIONS												
REEL DIA.	TAPE WIDTH	A0	В0	ко	D	E	F	W	PO	P2	Р	tmax
178mm (7")	8mm	0.70 ± 0.05	$1.15 \pm 0.10$	0.56 ± 0.05	1.55 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	2.00 ± 0.05	0.25
<ol> <li>Surface mount pr</li> <li>Suffix - T710 = 7"</li> <li>Marking on Part -</li> </ol>	NOTES         1. Dimensions are in millimeters.         2. Surface mount product is taped and reeled in accordance with EIA-481.         3. Suffix - T710 = 7" Reel - 10,000 pieces per 8mm tape.         4. Marking on Part - marking code (see page 2).         Package outline, pad layout and tape specifications per document number 06094.R1 3/11 - Option 2.											

ORDERING INFORMATION								
BASE PART NUMBER LEADFREE SUFFIX TAPE SUFFIX QTY/REEL REEL SIZE TUBE QTY								
PLR0521	n/a	-T710	10,000	7″	n/a			

## COMPANY INFORMATION

## **COMPANY PROFILE**

In business more than 20 years, ProTek Devices<sup>™</sup> is a privately-held company located in Tempe, Arizona, that offers a product line of transient voltage suppressors (TVS); avalanche breakdown diodes; steering diode TVS arrays and other surge suppressor component products. These TVS devices protect electronic systems from the effects of lightning, electrostatic discharge (ESD), nuclear electromagnetic pulses (NEMP), inductive switching and EMI / RFI. ProTek Devices also offers high performance interface and linear products that include analog switches; multiplexers; LED drivers; audio control ICs; RF and related high frequency products. The analog devices work in a host of consumer; industrial; automotive and other applications.

### CONTACT US

## **Corporate Headquarters**

2929 South Fair Lane Tempe, Arizona 85282 USA

## By Telephone

General: 602-431-8101 Sales: & Marketing: 602-414-5109 Customer Service: 602-414-5114 Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

#### By E-mail:

Sales: <u>sales@protekdevices.com</u> Customer Service: <u>service@protekdevices.com</u> Technical Support: <u>support@protekdevices.com</u>

## ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19 Zervex Singapore - 408538 Tel: +65-67488312 Fax: +65-67488313

Web www.protekdevices.com

COPYRIGHT © ProTek Devices 2011 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.