




Tyco Electronics Mid-Range Military/Aerospace Relays 10 AMPERES, 3PDT

- HERMETICALLY SEALED
- ALL WELDED CONSTRUCTION
- BALANCED FORCE
- PERMANENT MAGNET DRIVE
- CONTACTS RATED LOW LEVEL
 TO 10 AMPS
- 28 VDC AND 115/200 VAC 400 Hz 3 PHASE
- WEIGHT .99 OUNCES MAX. (28.15 GRAMS)



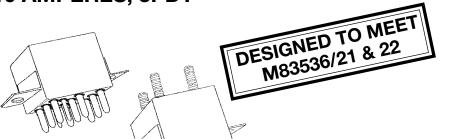

The Series FCB-310 relay is a polarized single-side stable design, where the flux from a permanent magnet provides the armature holding force in the deactivated state, and its flux path is switched and combined with the coil flux in the operated state. This results in appreciably increased contact pressure in both states over that of a spring return nonpolar design. We also manufacture other versions of this relay:

FCB-205: 5 AMP DPDT RELAY FCB-405: 5 AMP 4PDT RELAY

CONTACT RATING-AMPERES

Ratings Are Continuous Duty

TYPE OF LOAD	LIFE (MIN.) CYCLES X 10 ³	28 VDC	115VAC 400HZ	115AC 400Hz-	115/200VAC 400Hz-3Ø
Resistive	50	10	10	10	10
Inductive	10	6	-	-	-
Inductive	20	-	8	8	8
Motor	50	4	4	4	4
Lamp	50	2	2	2	2

Low Level Switching Capability: With contacts operating a load of 10 to 50 microamperes at 10 to 50 millivolts, the contact resistance miss detection level shall be 100 ohms max. Cycling rate is 1 to 12 per second, for 100,000 operations.

OVERLOAD CURRENT 30 AMPS DC, 60 AMPS 400HZ
RUPTURE CURRENT 40AMPS DC, 80 AMPS 400HZ
CONTACT MAKE BOUNCE 1 MILLISECOND AT NOMINAL VOLTAGE
MAX. CONTACT DROP AT 10 AMPS: INITIAL 0.100 VOLTS.
END OF LIFE 0.125 VOLTS





Tyco Electronics Mid-Range Military/Aerospace Relays 10 AMPERES, 3PDT

COIL DATA

				OVER TEMPERATURE RANGE		
COIL CODE	NOMINAL VOLTAGES	FREQ. HZ	DC RES (B).	PICKUP OR BELOW VOLTS	DROPOUT OR ABOVE VOLTS	MUST HOLD VOLTAGE (C)
1	6	DC	25 Ω	4.5	0.3	2.5
2	12	DC	100 Ω	9.0	0.75	4.5
3	28	DC	400 Ω	18.0	1.5	7.0
4 (A)	28	DC	400 Ω	18.0	1.5	7.0
5	48	DC	1275 Ω	36.0	2.5	14.0

- A. CODE 4 COILS HAVE BACK EMF SUPPRESSION TO 42 VOLTS MAX.
- D. MAX. OVER-VOLTAGE: 6 & 12 VDC COILS 120% OF NOMINAL; ALL OTHERS 110% OF NOMINAL.
- B. DC COIL RESISTANCE \pm 10% AT 25°C;
- C. RELAY WILL STAY IN PICKED-UP STATE DOWN TO MUST HOLD VOLTAGES SHOWN.

GENERAL SPECIFICATIONS

	-70°C TO + 125°C
	300,000 FEET
Z, & Y ENCLOSURES	200 g FOR 6 mS
W, X & M ENCLOSURES	100 g FOR 6 mS
T ENCLOSURE (IN TRACK)	50 g FOR 11 mS
Z, & Y ENCLOSURES	30 g 70-3000Hz
W, X & M ENCLOSURES	20 g 70-3000Hz
T ENCLOSURE (IN TRACK)	10 g 57-500 Hz
	20 g 500-3000 Hz
Z, & Y ENCLOSURES	0.4 g ² /Hz 50-2000Hz
T, W & M ENCLOSURES	0.2 g ² /Hz 50-2000Hz
ALL CIRCUITS TO GROUND AND	
CIRCUIT TO CIRCUIT.	1000 V rms
COIL TO GROUND	1000 V rms
	250 V rms
INITIAL (500 VDC)	100 M Ω MINIMUM
AFTER LIFE OR ENVIRONMENTAL TESTS	5 50 M Ω MINIMUM
:	6 ms OR LESS
:	6 ms OR LESS
	W, X & M ENCLOSURES T ENCLOSURE (IN TRACK) Z, & Y ENCLOSURES W, X & M ENCLOSURES T ENCLOSURE (IN TRACK) Z, & Y ENCLOSURES T, W & M ENCLOSURES ALL CIRCUITS TO GROUND AND CIRCUIT TO CIRCUIT. COIL TO GROUND

^{*} Max. contact opening under vibration or shock 10 microseconds






Tyco Electronics Mid-Range Military/Aerospace Relays


10 AMPERES, 3PDT

Below are shown the standard terminal types and the enclosures available. Specify the assembly as indicated under How To Order. Dimensions are shown in inches \pm .010 and (Millimeters \pm .25).

TERMINALS

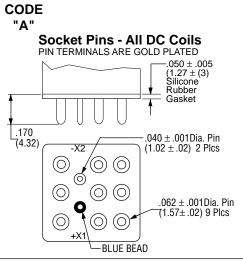

Solder Pin Terminals PIN TERMINALS TIN/LEAD PLATED .170 .030±.002 Dia.Pin (4.32) .72 .76±.05) 2 Plcs .062±.002Dia.Pin (1.57±.05) 9 Plcs

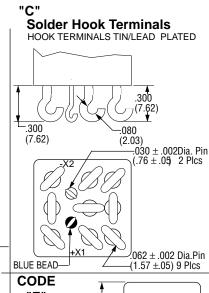

CODE


M83536/22-025 (REFERENCE ONLY) .640 Max. (16.26) .810 Max. (20.37) .810 Max. (20.37)


All Enclosures have cupro-Nickel cans bright acid tin/lead plated after assembly to terminal headers.


ENCLOSURES

Dimensions: Inches \pm .010 (mm \pm .25)


Enclosure "T" is for use with track mounted sockets and requires socket pin terminals, but no gasket. The gasket is included in the socket assembly.



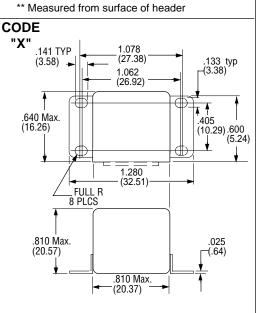

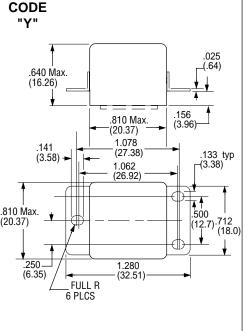

40

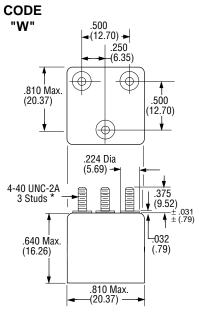


*Metric threads available, To specify use Min place of W





Tyco Electronics Mid-Range Military/Aerospace Relays 10 AMPERES, 3PDT


TERMINAL WIRING




NOTE: Polarity must be observed with DC coil supply. Relay is polarized with a permanent magnet and will not operate or be damaged by reverse polarity.

Diodes used in transient suppression and in AC rectifier circuits have peak inverse voltage rating of 600 VDC minimum. Zener diodes have a minimum rating of 1 watt.

Terminal designations are for reference only and do not appear on the header.



TERMINAL LAYOUT

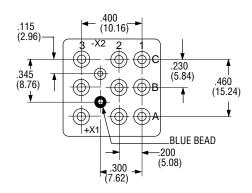

HOW TO ORDER

