


Bandpass Filter

KR 1905A-2


Passband Amplitude

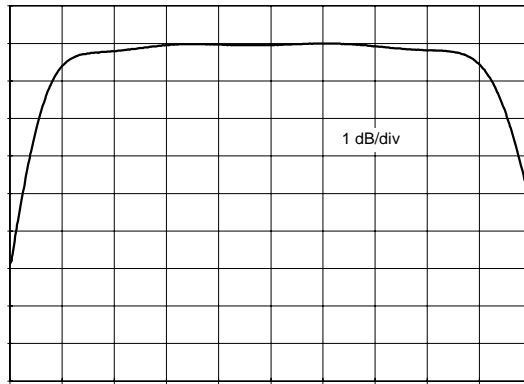

15 KHz

19.5 KHz

Overall Amplitude

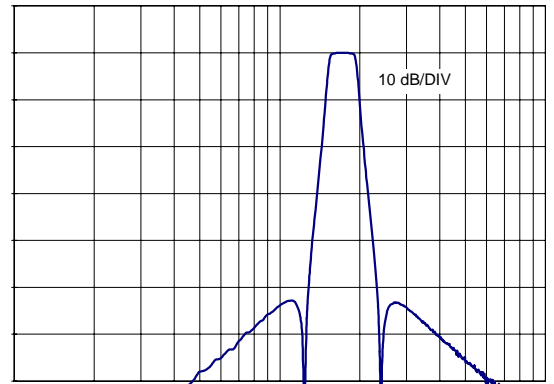


1 KHz

100 KHz

Specifications

| | |
|------------------------------------|-------------------------|
| KR Part Number | 1905A-2 |
| Filter Type | Bandpass |
| Insertion Loss | < 6.6 dB |
| Lower / Upper Passband Frequencies | 15.624 KHz / 18.856 KHz |
| Passband Loss | < 1 dB |
| Lower / Upper Stopband Frequencies | 11.24 KHz / 23.24 KHz |
| Stopband Attenuation | > 40 dB |
| Source Impedance | 100 Ω |
| Load Impedance | 1000 Ω |
| | |
| | |

Outline Drawing

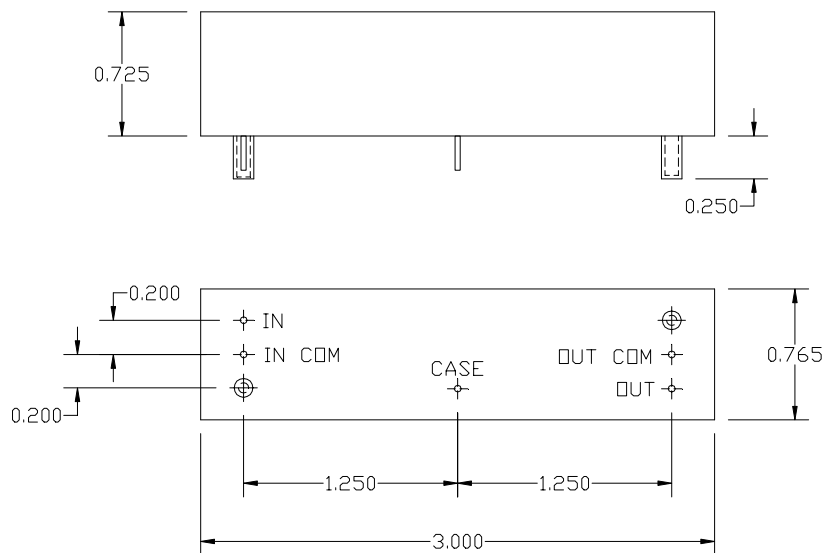

Terminals 0.03" diameter
Metal Case
Studs 4-40 UNC-2A (2 Plcs)

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900