
Ceramic Bandpass Filter IFD08855

Features

- Ceramic bandpass filter
- 50Ω single-ended operation
- ullet Surface Mounted Module Package (21.7mm $\, imes\,$ 9.8mm $\, imes\,$ 7.5mm)

Package Dimensions

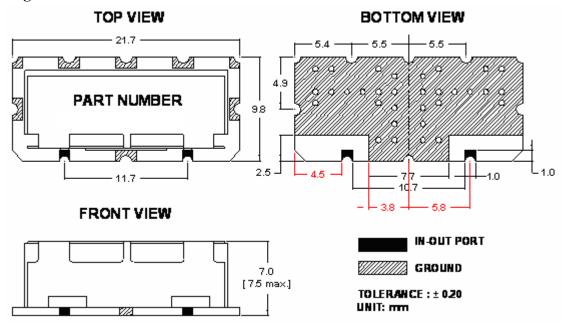

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	$^{\circ}$ C	-40	25	85
Storage Temperature Range	$^{\circ}\!\mathbb{C}$	-40	25	85
Power Handling Capability	Watt	-	-	3

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd.	Part No.	IFD08855	
102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyounggi-Do, Korea 421-809	Rev. Date	2014-09-	04	
		Rev.	AS 01	1/3

Ceramic Bandpass Filter IFD08855

Specifications

Fo = 881.5MHz

	Minimum	Typical	Maximum	Unit
Center Frequency (Fo)	-	881.5	-	MHz
Insertion Loss (869 ~ 894MHz)	-	2.0	2.5	dB
Amplitude Ripple (869 ~ 894MHz)	-	0.6	1.0	dB
Return Loss (869 ~ 894MHz)	15	18	-	dB
Relative Attenuation @ 849 MHz	48.0	53.0	-	dB
Input/Output Impedance		50		Ohm

Notes:

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss

Integrated Technology Future

IIF Co., Lta.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyounggi-Do, Korea 421-809

Part No.	IFD08855		
Rev. Date	2014-09-04		
Rev.	AS 01	2/3	

Ceramic Bandpass Filter IFD08855

Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

Part Number 1)

- 1) Part Number
 - * Ink or Laser Marking available



ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyounggi-Do, Korea 421-809

Part No.	IFD08855		
Rev. Date	2014-09-04		
Rev.	AS 01	3/3	