

LEG-150W Series– Fixed Output and Dimmable Switch Mode LED Drivers Constant Current, Non-Isolated Black Magic Thermal Advantage™ Metallic Housing

Electrical Specifications

Input Voltage Range:	120-277 VAC Nom. (108-305 V Min/Max)
Input Over-Voltage:	Can endure 320Vac for 48 Hrs, 350Vac for 2 Hrs
Frequency:	50/60 Hz Nom. (47-63 Hz Min/Max)
Power Factor:	>0.90 @ full load, 100V through 277V
THD:	≤ 20% @ for all loads >80%
Inrush Current:	<40.0 Amps maximum @ 230 VAC, cold start 25°C
Input Current:	1.4A@ 120Vac, 0.68A @ 230Vac
Maximum Power:	150W
Current Accuracy:	± 1% Over input line variation
Load Regulation:	± 2%
Leakage Current:	400 uA Typical
Hold Up Time:	Half Cycle
Protection:	Output Protection: Over-Voltage, Over-Current, and Short Circuit Protection, reset by power cycling

Environmental Specifications

Minimum Starting Temp:	-30°C
Maximum Case Temp.	80°C
Storage Temperature:	-40°C to +85°C
Humidity:	5% to 95%
Cooling:	Convection
Vibration Frequency:	5 to 55 Hz/2g, 30 minutes
Sound Rating:	Class A
MTBF:	380,000 Hours at full load and 40°C ambient conditions per MIL-217F Notice 2 $$
EMC:	FCC 47CFR Part 15 Class A compliant
Impact Resistance:	1g/s
Weight:	45 oz (1270 grams)



- IP66
- High Power Factor
- UL8750, EN61347, CSA 22.2

Constant Current - Non Dimming					
Model Number	Output Voltage Range (Vdc)	Output Current (mA ±3%)	Max Output Power (W)	Max Efficiency	
LEG150W-425-C0350	120-425	350	148.7	92%	
LEG150W-280-C0530	94-280	530	148.4	91%	
LEG150W-210-C0700	70- 210	700	147.0	90%	

Ordering Options:

-D: 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Gray on the output side. 0-10V Dimming is compatible with most quality 0-10V dimmers. See pg. 3 for more information.

Constant Current - 0-10VDC Dimming					
Model Number	Output Voltage Range (Vdc)	Output Current (mA ±3%)	Max Output Power (W)	Max Efficiency	
LEG150W-425-C0350-D	120-425	350	148.7	92%	
LEG150W-280-C0530-D	94-280	530	148.4	91%	
LEG150W-210-C0700-D	70-210	700	147.0	90%	



Note:

LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.

Specifications subject to change without notice.


Rev 8-31-15

LEG150W Series



SSL Solutions Faster Than The Speed Of Light®

Pg 2 of 3

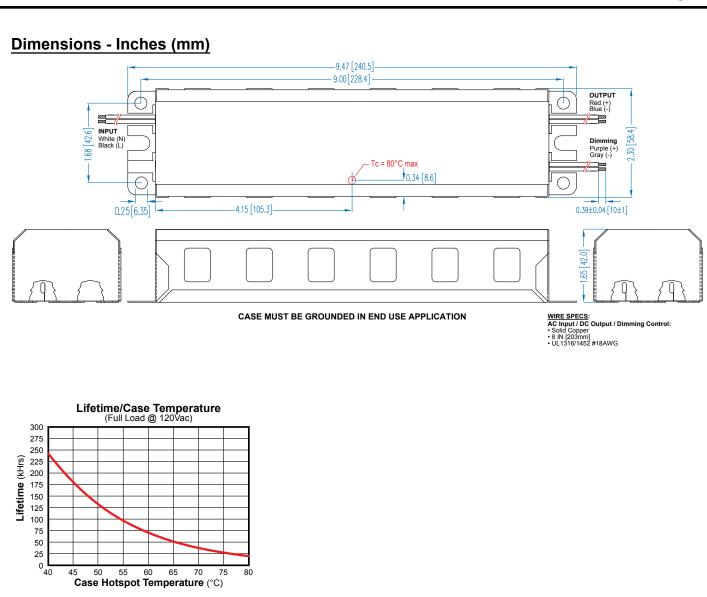

Note:

Life calculations are based on reliability with confidence using a 90% confidence level and <5% failure rate. At a confidence level of 90% it is expected that <5% of the parts will fail at the rated life provided. (Failure is defined as a driver drifting outside specification, rather than fail to operate)

UL Conditions of Acceptability

See website for additional information



LEG150W Series


SSL Solutions Faster Than The Speed Of Light®

Pg 3 of 3

"-D" Option: - 0-10VDC and Resistance Dimming


Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0 mA	—	2 mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0 V	—	+15 V

Typical Dimming Circuit



(Dimmer must be current-sink type control)

Output Current / 0-10VDC Dimming Input

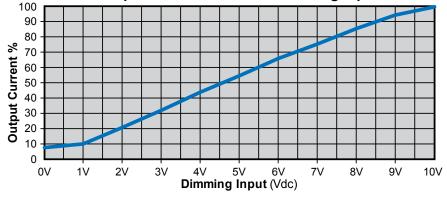

Notes:

- 1. 0-10V dimmable version comes with an extra two wires +Purple/-Gray on the output side.
- 2. When connected to a dimming device, 0-10V dimmable version will have a ±10% output current tolerance.
- This is due to variation between different 0-10V dimmers.
- 3. Compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended dimmer is Leviton IP710 or equivalent
- 4. 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
- 5. 0-10V dimmable version output will be 100% with Purple/Gray open and minimum with Purple/Gray Shorted.