
## **Dimensions:** [mm]

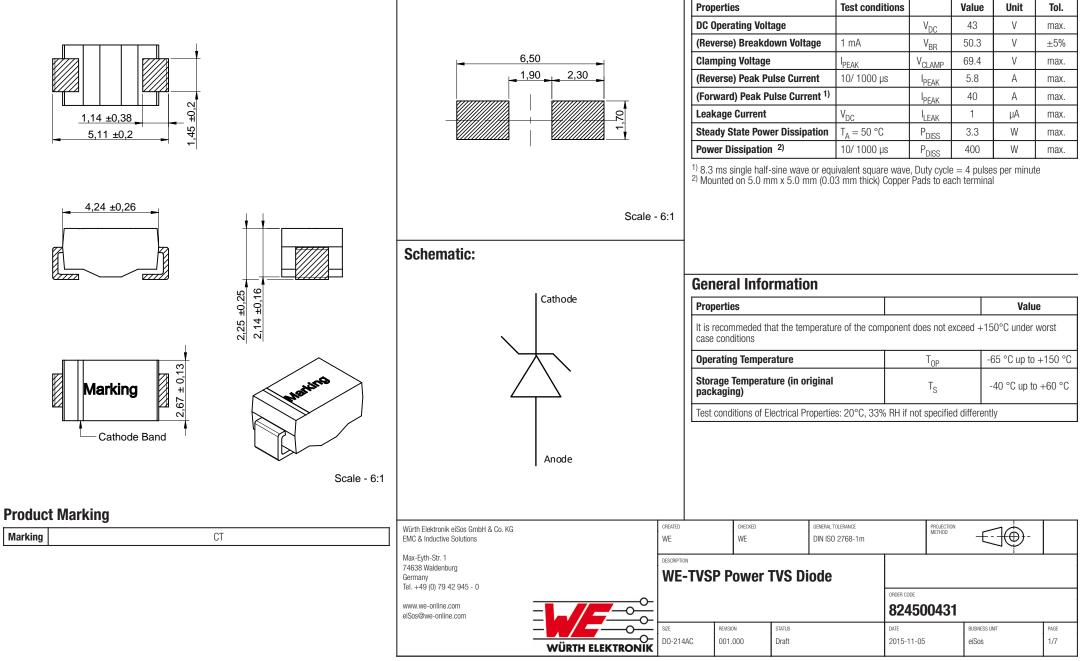

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed on intended for use in areas such as milliary, asrospace, aviation, nuclear control, train control, ship control, train control, ship control, train control, train control, ship control, train control, trai

## Recommended Land Pattern: [mm]

**Electrical Properties** 

| Properties & Approvals                  |                                                                              | Maximum Peak Pulse Power Rating:                       |
|-----------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------|
| UL Approval                             | UL497B: E478010                                                              |                                                        |
| Flammability Rating of Plastic Material | UL94-V0                                                                      |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              | Pulse With [µs]                                        |
|                                         |                                                                              |                                                        |
|                                         |                                                                              |                                                        |
|                                         | Würth Elektronik eiSos GmbH<br>EMC & Inductive Solutions                     | H & Co. KG CREATED CHECKED GENERAL TO<br>WE WE DIN ISO |
|                                         | Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 79 42 945 - 0 | WE-TVSP Power TVS Diode                                |
|                                         | www.we-online.com<br>eiSos@we-online.com                                     |                                                        |
|                                         |                                                                              | - SIZE REVISION STATUS                                 |

1000

Ð

PAGE

2/7

BUSINESS UNIT

eiSos

PROJECTION METHOD

ORDER CODE 824500431

2015-11-05

DATE


100

GENERAL TOLERANCE


DIN ISO 2768-1m

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed in itended for use in areas such as military, aerospace, avaitation, nuclear control, train control,

# **Peak Pulse Power and Current Derating:**

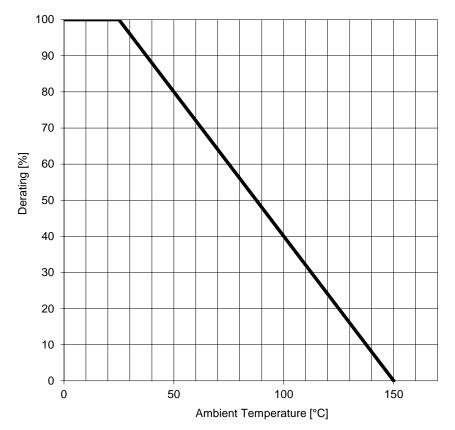

**Steady State Power Dissipation Derating:** 

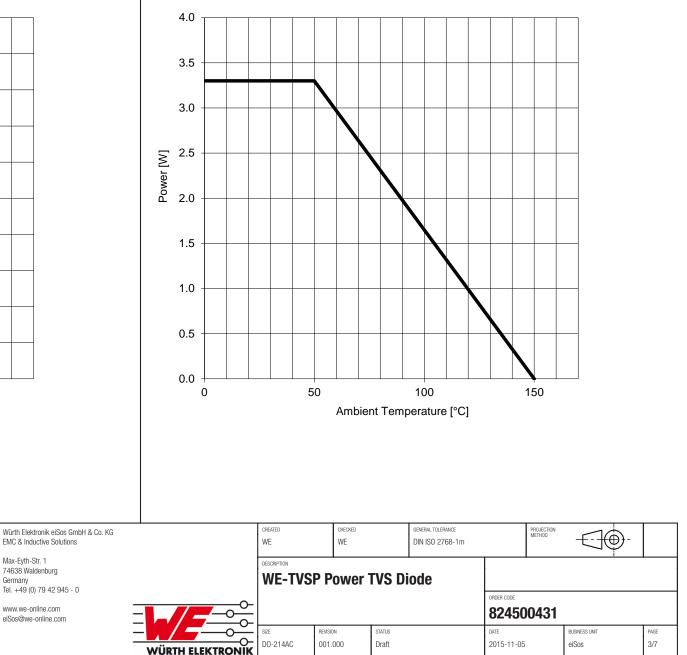


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.


Max-Eyth-Str. 1

Germany

## **Maximum Non-Repetitive Forward Surge Current:**

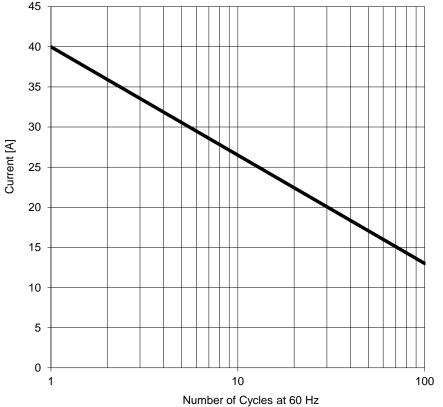


**Typical Junction Capacitance:** 

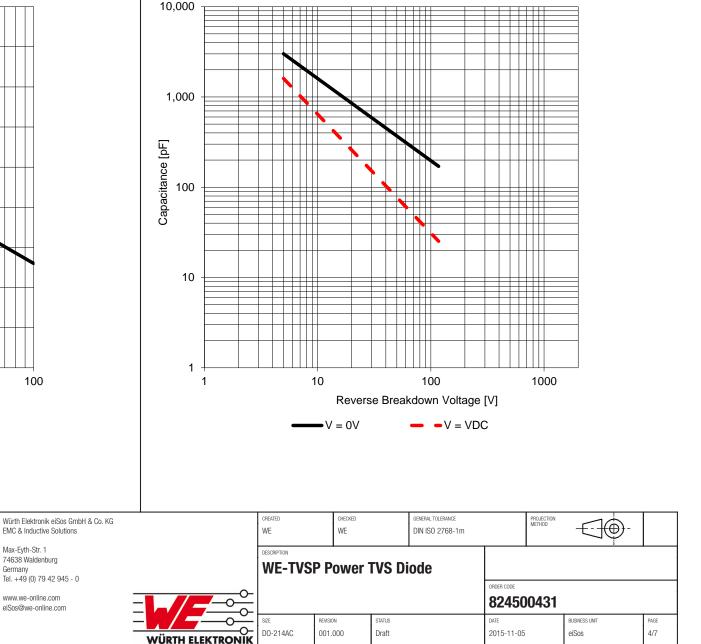

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Germany

# **Classification Reflow Profile for SMT components:**

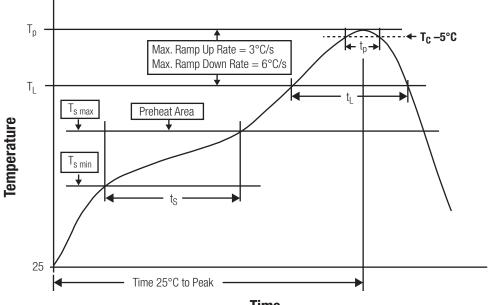

Time

# **Classification Reflow Soldering Profile:**


| Profile Feature                                     |                    | Value             |
|-----------------------------------------------------|--------------------|-------------------|
| Preheat Temperature Min <sup>1)</sup>               | T <sub>s min</sub> | 150 °C            |
| Preheat Temperature Max                             | T <sub>s max</sub> | 200 °C            |
| Preheat Time $t_s$ from $T_{s min}$ to $T_{s max}$  | t <sub>s</sub>     | 60 - 120 seconds  |
| Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )    |                    | 3 °C/ second max. |
| Liquidous Temperature                               | TL                 | 217 °C            |
| Time t <sub>L</sub> maintained above T <sub>L</sub> | tL                 | 60 - 150 seconds  |
| Peak package body temperature                       | Τ <sub>p</sub>     | see table         |
| Time within 5°C of actual peak temperaure           | t <sub>p</sub>     | 20 - 30 seconds   |
| Ramp-down Rate (T <sub>L</sub> to T <sub>P</sub> )  |                    | 6 °C/ second max. |
| Time 25°C to peak temperature                       |                    | 8 minutes max.    |

<sup>1)</sup> refer to IPC/JEDEC J-STD-020D

## **Package Classification Reflow Temperature:**

| Properties                                                    | Volume mm³<br><350 | Volume mm³<br>350-2000 | Volume mm³<br>>2000 |
|---------------------------------------------------------------|--------------------|------------------------|---------------------|
| PB-Free Assembly I Package Thickness &It 1.6 mm <sup>1)</sup> | 260 °C             | 260 °C                 | 260 °C              |
| PB-Free Assembly   Package Thickness 1.6 mm - 2.5 mm          | 260 °C             | 250 °C                 | 245 °C              |
| PB-Free Assembly   Package Thickness $\geq$ 2.5 mm            | 250 °C             | 245 °C                 | 245 °C              |

1) refer to IPC/JEDEC J-STD-020D

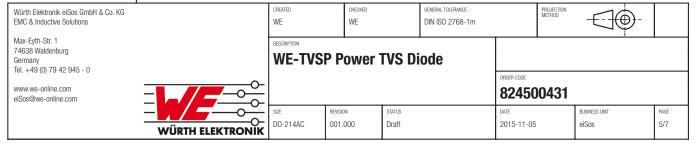

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

# **Cautions & Warnings:**

The following conditions apply to all goods within the product series of WE-TVSP of Würth Elektronik eiSos GmbH & Co. KG:

## **General:**

All recommendations according to the general technical specifications of the data-sheet have to be complied with. Further the TVS Diode is not designed for voltage stabilization with continuous power dissipation.

The disposal and operation of the product within ambient conditions which probably alloy or harm the component surface has to be avoided.

The exposure of steam, saline spray, atmosphere with reduced oxygen content, corrosive gases, rain or condensation and direct sunlight shall be prohibited.

If the product is potted in customer applications, the potting material might shrink and react chemically during and after hardening. According to this the product is exposed to the pressure and material of the potting material with the effect that the body and termination is possibly damaged by this pressure or the chemically reaction and so the electrical as well as the mechanical characteristics and the life time are in danger to be affected. After the potting material is cured, the body and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply for customer specific products.

Cleaning agents that are used to clean the application might damage or change the characteristics of the component, body, pins or termination and might reduce the life time.

Direct mechanical impact to the product shall be prevented as the material of the body could flake or in the worst case it could break.

Signals operated continuously with a high ratio of direct-current voltage might have an influence on the product life time.

#### **Product specific:**

Follow all instructions mentioned in the data sheet, especially:

- The solder profile has to be complied with according to the technical reflow soldering specification, otherwise no warranty will be sustained.
- All products shall be used before the end of the period of 12 months based on the product date-code, if not a 100% solderability can
  not be warranted.

Violation of the technical product specifications such as exceeding the nominal rated voltage will result in the loss of warranty.

The general and product specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness.

| Würth Elektronik eiSos GmbH & Co. KG<br>EMC & Inductive Solutions            | CREATED | CHECKED                 |                     | general tolerance<br>DIN ISO 2768-1m |            | PROJECTION<br>METHOD |  |                        |             |
|------------------------------------------------------------------------------|---------|-------------------------|---------------------|--------------------------------------|------------|----------------------|--|------------------------|-------------|
| Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 79 42 945 - 0 |         | WE-TVSP Power TVS Diode |                     |                                      |            |                      |  | I                      | · · · · ·   |
| www.we-online.com<br>eiSos@we-online.com                                     |         |                         |                     |                                      | ORDER CODE | 0431                 |  |                        |             |
|                                                                              |         | size<br>DO-214AC        | REVISION<br>001.000 | status<br>Draft                      |            | DATE<br>2015-11-05   |  | BUSINESS UNIT<br>eiSos | page<br>6/7 |

This electronic component has been designed and developed for useg in general electronic equipment only. This product is negative for use in equipment where a higher safely standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover With Elektronik elises GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, avaion, nuclear control, submarrine, transportation signal, disaster prevention, medical, public information network etc.. With Elektronik elises GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability must cause as the safety and reliability for the safety and reliability reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability for an control, transportation signal, disaster prevention, medical, public information network etc... With Elektronik elises GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability for advertised on the safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability for advertised on the safety for the safety for

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

## **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

## 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

## 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

## 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

| Würth Elektronik eiSos GmbH & Co. KG<br>EMC & Inductive Solutions            | CREATED | CHECKED                 |          | GENERAL TOLERANCE<br>DIN ISO 2768-1m |       | PROJECTION<br>METHOD |   |               |      |
|------------------------------------------------------------------------------|---------|-------------------------|----------|--------------------------------------|-------|----------------------|---|---------------|------|
| Max-Eyth-Str. 1<br>74638 Waldenburg<br>Germany<br>Tel. +49 (0) 79 42 945 - 0 |         | WE-TVSP Power TVS Diode |          |                                      |       |                      | • |               |      |
|                                                                              |         |                         |          |                                      |       | ORDER CODE           |   |               |      |
| www.we-online.com<br>eiSos@we-online.com                                     |         |                         |          |                                      | 82450 | 0431                 |   |               |      |
|                                                                              |         | SIZE                    | REVISION | STATUS                               |       | DATE                 |   | BUSINESS UNIT | PAGE |
|                                                                              |         | DO-214AC                | 001.000  | Draft                                |       | 2015-11-05           |   | eiSos         | 7/7  |

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use age in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in developed relicital circuits that require high safety and reliability evaluation checks for safety and reliability evaluation.