TOSHIBA


Toshiba TLxH20 Series LEDs

Features

5mm Package InGaAIP Technology Transparent Lens High Intensity Light Emission Excellent Low Current Light Output

Applications

Traffic Signals
Safety Equipment

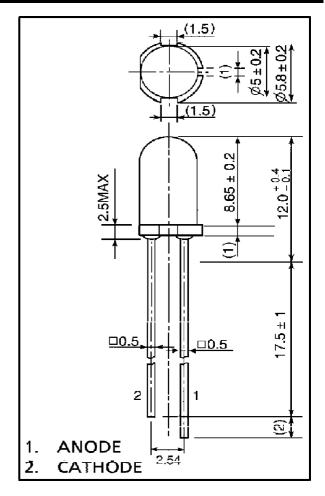

Series Line-Up

OCTIOS EITIC OP				
Part Number	Color	Material		
TLOH20TP	Ultra Bright Orange	InGaAIP		
TLRMH20TP	Ultra High Efficiency Red	InGaAlP		
TLSH20TP	Ultra Bright High Efficency Red	InGaAlP		
TLYH20TP	Ultra Bright Yellow	InGaAlP		

Maximum Ratings (Ta=25°C)

Part Number	Forward Current IF	Reverse Voltage V _R	Power Dissipation PD	Operating Temperature Topr	Storage Temperature T _{stg}
TLOH20TP	50	4	120.00	−40 ~ 100	− 40 ~ 120
TLRMH20TP	50	4	120.00	−40 ~ 100	− 40 ~ 120
TLSH20TP	50	4	120.00	−40 ~ 100	− 40 ~ 120
TLYH20TP	50	4	120.00	−40 ~ 100	− 40 ~ 120
Unit	mA	V	mW	°C	°C

Company Headquarters

120 Broadway Menands, New York 12204 Toll Free: 800.984.5337 Fax: 518.432.7454





Toshiba TLxH20 Series LEDs

Electrical and Optical Characteristics (Ta=25°C)

Part Number	PWL nm λP	Material	View Angle	Luminous Intensity				Forward Voltage V _F				Rev Current	
			2θ 1/2	min.	typ.	max.	IF@	min.	typ.	max.	IF@	max.	VR@
TLOH20TP	612	InGaAIP	7°	4760.00	15000.00	-	20mA	_	2.00	2.40	20mA	50	4V
TLRMH20TP	636	InGaAIP	7°	2720.00	9000.00	-	20mA	-	1.90	2.40	20mA	50	4V
TLSH20TP	623	InGaAIP	7°	4760.00	11000.00	-	20mA	-	2.00	2.40	20mA	50	4V
TLYH20TP	590	InGaAIP	7°	4760.00	13000.00	-	20mA	-	2.00	2.40	20mA	50	4V
-	nm	-	deg		mcd		-		٧		-	μ Α	-

Precautions

- Soldering temperature: 260°C max, soldering time: 3 s max (soldering portion of lead: up to 2 mm from the body of the device).
- If the lead is formed, the lead should be formed up to 5 mm from the body of the device without forming stress to the resin. Soldering should be performed after lead forming.
- This visible LED lamp also emits some IR light. If a photodetector is located near the LED lamp, please ensure that it will not be affected by this IR light.

NOTICE:

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
- In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


Company Headquarters 120 Broadway Menands, New York 12204


Toll Free: 800.984.5337 Fax: 518.432.7454





West Coast Sales Office 950 South Coast Drive, Suite 265 Costa Mesa, California 92626 Toll Free: 800.984.5337

TLOH20TP Graphs











Radiation pattern

Ta = 25°C



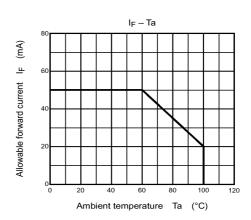



Company Headquarters 120 Broadway Menands, New York 12204 Toll Free: 800.984.5337 Fax: 518.432.7454





West Coast Sales Office 950 South Coast Drive, Suite 265 Costa Mesa, California 92626 Toll Free: 800.984.5337

TLRMH20TP Graphs



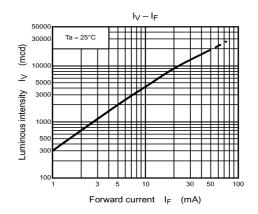









Ta = 25°C





Company Headquarters 120 Broadway Menands, New York 12204

Menands, New York 1220 Toll Free: 800.984.5337 Fax: 518.432.7454





West Coast Sales Office 950 South Coast Drive, Suite 265 Costa Mesa, California 92626 Toll Free: 800.984.5337





Toshiba TLxH20 Series LEDs

TLSH20TP Graphs











Radiation pattern

Ta = 25°C

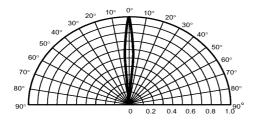

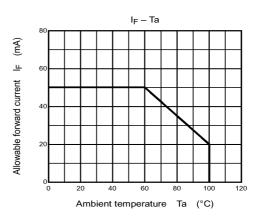

Company Headquarters 120 Broadway Menands, New York 12204 Toll Free: 800.984.5337 Fax: 518.432.7454 marktech


West Coast Sales Office 950 South Coast Drive, Suite 265 Costa Mesa, California 92626 Toll Free: 800.984.5337 Fax: 714.850.9314


Web: www.marktechopto.com | Email: info@marktechopto.com





Toshiba TLxH20 Series LEDs

TLYH20TP Graphs













 $Ta = 25^{\circ}C$





Company Headquarters 120 Broadway Menands, New York 12204

Toll Free: 800.984.5337 Fax: 518.432.7454



West Coast Sales Office 950 South Coast Drive, Suite 265

Costa Mesa, California 92626 Toll Free: 800.984.5337 Fax: 714.850.9314