

Chip Ferrite Beads - High Current Series Specifications


Part Number	[Z] @ 100 MHz (ohms)		DC Resistance	Rated Current
	Typical	Minimum	(m ohms) Maximum	(mA)
WPBH series (For high current ~3A)				
WPBH-H1005-100	10	7.5	70	500
WPBH-T1005-100	10	7.5	70	500
WPBH-S1005-100	10	7.5	80	500
WPBH-M1608-300	30	22	50	1000
WPBH-M1608-600	60	45	100	500
WPBH-M1608-600	60	45	80	1000
WPBH-M1608-121	120	90	150	500
WPBH-M1608-121	120	90	50	1000
WPBH-M2012-260	26	20	20	2000
WPBH-M2012-600	60	45	20	3000
WPBH-M2012-900	90	68	30	3000
WPBH-M2012-121	120	90	50	2500
WPBH-M2012-221	220	165	50	2000
WPBH-M2012-301	300	225	70	2000
WPBH-M2012-601	600	450	100	1000
WPBH-T2012-260	26	20	20	3000
WPBH-T2012-121	120	90	30	2500
WPBH-T2012-251	250	190	50	3000
WPBH-S2012-8R0	8	6	30	1500
WPBH-T3216-260	26	20	30	3000
WPBH-T3216-350	35	26	30	2500
WPBH-H3216-500	50	37	20	3000
WPBH-M3216-121	120	90	30	3000
WPBH-M3216-501	500	375	60	2500
WPBH-M3216-601	600	450	60	2500
WPBH-H4516-600	60	45	20	3000
WPBH-H4516-111	110	83	20	3000
WPBH-H4532-121	120	90	30	3000
WPBH-T4532-121	120	90	30	3000
WPBH-M4532-601	600 (at 50MHz)	450	40	3000
WPBH-M4532-132	1300 (at 60MHz)	980	50	3000
WPBH-B4532-132	1300	980	50	3000
WPBH-M5750-401	400	300	40	2000

Chip Ferrite Beads - High Current Series Specifications - (continued)


Part Number	[Z] @ 100 MHz (ohms)		DC Resistance	Rated Current
	Typical	Minimum	(m ohms) Maximum	(mA)
WPBU series (For high current ~6A)				
WPBU-M2012-400	40	30	20	5000
WPBU-M2012-600	60	45	20	5000
WPBU-M2012-800	80	60	20	5000
WPBU-M2012-121	120	90	20	5000
WPBU-T2012-500	50	37	15	4000
WPBU-H3216-500	50	37	10	6000
WPBU-H4516-600	60	45	10	6000
WPBU-H4532-121	120	90	20	6000
WPBU-M5750-401	400	300	20	6000

— Z --- R --- X


WPBH-M1608-600

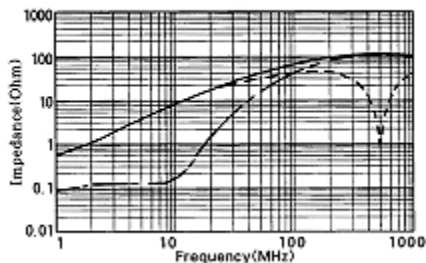


WPBH-M2012-600

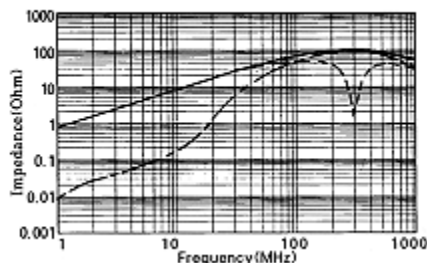


WPBH-H3216-500

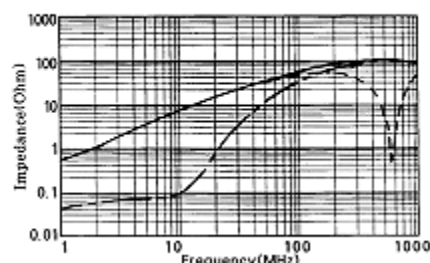


WPBH-H4516-600

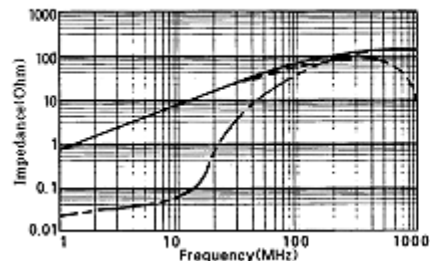


WPBH-H4532-121

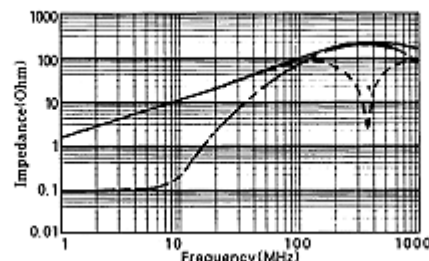


WPBH-M4532-132

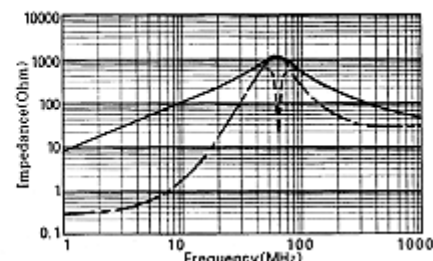


WPBH-M5750-401

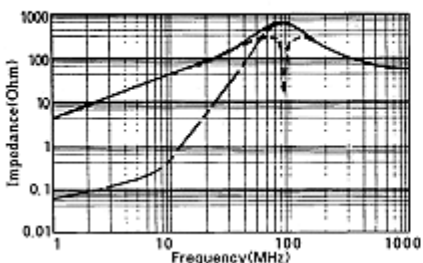

WPBU-H3216-500

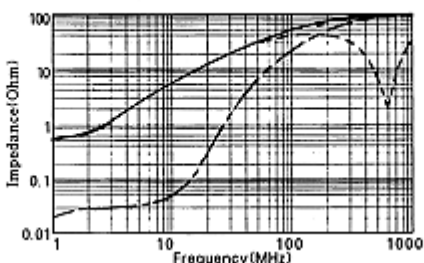

WPBH-H4516-600

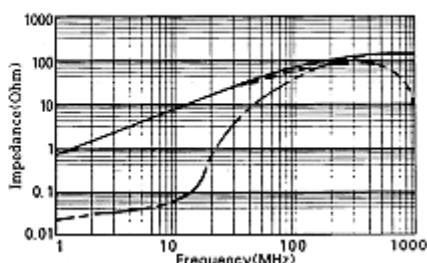

Chip Ferrite Beads - High Current Series Specifications - (continued)

— Z --- R ---X

