

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0191290045](#)
Status: **Active**
Description: Krimptite™ Block Spade Terminal for 18-22 AWG Wire

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
 UL E32244

General

Product Family Ring and Spade Terminals
 Series [19129](#)
 Crimp Quality Equipment Yes
 Mil-Spec N/A
 Product Name Krimptite™
 Type Spade Block

Physical


Barrel Type Closed
 Insulation None
 Material - Plating Mating Tin
 Packaging Type Bag
 Plating min: Mating (µin) 100
 Plating min: Mating (µm) 2.5
 Plating min: Termination (µin) 100
 Plating min: Termination (µm) 2.5
 Stud Size 8 (M4)
 Termination Interface: Style Crimp or Compression
 Wire Size AWG 18, 20, 22
 Wire Size mm² 0.35 - 0.80

Material Info

Old Part Number AA-134-08

Reference - Drawing Numbers

Sales Drawing AACD10301

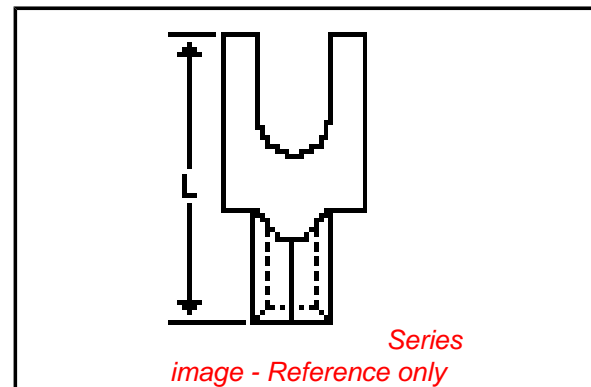

EU RoHS

**ELV and RoHS
 Compliant**
**REACH SVHC
 Contains SVHC: No**
**Halogen-Free
 Status**

China RoHS



Halogen-Free

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

[19129Series](#)

Application Tooling | [FAQ](#)

*Tooling specifications and manuals are
 found by selecting the products below.
 Crimp Height Specifications are then
 contained in the Application Tooling
 Specification document.*

Global

Description	Product #
Hand Crimp Tool	0640030100
Crimp Head for the AT-200™ Pneumatic Hand Tool	0640070100

NOTES:

① MAT'L : COPPER

PLATING : ELECTRO-TIN (.0003 MIN.)


STUD SIZES : (.005)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING # E32244
 "CSA" LISTING # 18689

ALL DIMENSIONS = INCHES
MM

WIRE SIZE: 22-18 AWG
 .25-1.5 MM²

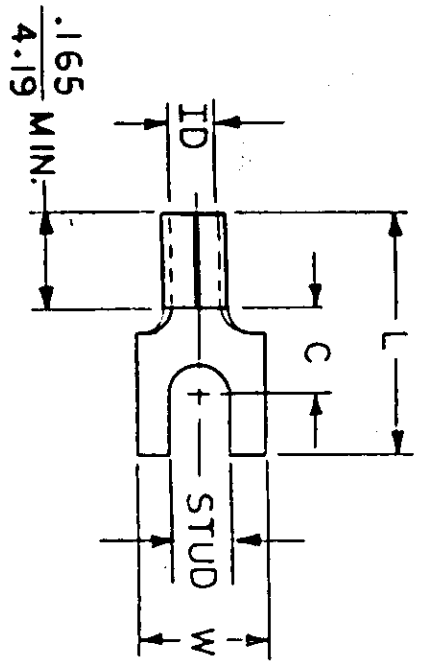

FILE NO. AA-CD-103-01

PART NUMBER	"W"	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS	DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			
							FRAC.	DEC.	ANG.	
AA-134-	.291 7.39	.207 5.26	.560 14.22	.062 1.57	04, 06, 08	.028 ^{±.001} .71				
AA-138-	.245 6.23	.207 5.26	.560 14.22	.062 1.57	04, 06	.028 ^{±.001} .71				
AA-191-	.420 10.67	.235 5.97	.640 16.26	.054 1.37	06, 08, 10	.031 ^{±.001} .79				
AA-194-	.375 9.53	.235 5.97	.643 16.33	.054 1.37	06, 08, 10	.031 ^{±.001} .79				
AA-197-	.325 8.26	.235 5.97	.640 16.26	.054 1.37	04, 06, 08	.031 ^{±.001} .79				
							REFERENCE			
							SCALE:	NTS	DATE	TITLE:
							DRWN. BY:	JJ	10-17-84	SPADE TONGUE TERMINAL
							CHKD. BY:	GZ	10-22-84	KRIMP TITE 100-SERIES
							APPRD. BY:			
							DWG. NO.	A	CUSTOMER DWG.	

