

Tous droits réservés. Toute réimpression ou communication à des tiers sans autorisation écrite de BERG ELECTRONICS est formellement interdite.



All rights reserved. Reproduction or use in any form without written authority from the proprietor. Property of BERG ELECTRONICS. Copyright BERG ELECTRONICS Inc.

DESCRIPTION : ABOVE PCB, DECK AND PUSH ROD LOCATION ARE AS VIEW BY USER.

PRODUCT NO.	PUSH ROD LOCATION		STAND-OFF HEIGHT	CLOSEST TO PCB EJ HDR ASS'Y (B)	FARTHEST FROM PCB EJ HDR ASS'Y (C)	THREADED INSERT (2 PCS) (D) 61553-****	MATING RECEPTACLE (E)	CHLOROPRANE RUBBER FOAM (F)	P.C.B SIDE	RECOMMENDED P.C.B LAYOUT	MOUNT STYLE TO PCB AND PUSH ROD SIDE
(A) 61720-*****	DECK CLOSEST TO PCB	DECK FARTHEST TO PCB									
000CA	LEFT	RIGHT	0.0	61721-100CA	61373-000CA	0000	100 POSITIONS (2x50) 0.8mm RECEPTACLE PART NO. 73277-101000	NONE	ABOVE	SEE DRAWING NO.: TA-1050	
006CA	LEFT	RIGHT	0.6	61844-106CA	61843-006CA	0006		NONE			
020CA	LEFT	RIGHT	2.0	61844-120CA	61843-020CA	0020		NONE			
022CA	LEFT	RIGHT	2.2	61844-122CA	61843-022CA	0022		NONE			
040CA	LEFT	RIGHT	4.0	61844-140CA	61843-040CA	0040		NONE			
043CA	LEFT	RIGHT	4.3	61844-143CA	61843-043CA	0043		NONE			
050CA	LEFT	RIGHT	5.0	61844-150CA	61843-050CA	0050		NONE			
100CA	RIGHT	LEFT	0.0	61721-000CA	61373-100CA	0000		NONE			
106CA	RIGHT	LEFT	0.6	61844-006CA	61843-106CA	0006		NONE			
120CA	RIGHT	LEFT	2.0	61844-020CA	61843-120CA	0020		NONE			
122CA	RIGHT	LEFT	2.2	61844-022CA	61843-122CA	0022		NONE			
140CA	RIGHT	LEFT	4.0	61844-040CA	61843-140CA	0040		NONE			
143CA	RIGHT	LEFT	4.3	61844-043CA	61843-143CA	0043		NONE			
150CA	RIGHT	LEFT	5.0	61844-050CA	61843-150CA	0050		NONE			
200CA	RIGHT	RIGHT	0.0	61721-000CA	61373-000CA	0000		NONE			
206CA	RIGHT	RIGHT	0.6	61844-006CA	61843-006CA	0006		NONE			
220CA	RIGHT	RIGHT	2.0	61844-020CA	61843-020CA	0020		NONE			
222CA	RIGHT	RIGHT	2.2	61844-022CA	61843-022CA	0022		NONE			
222CAM	RIGHT	RIGHT	2.2	61844-022CA	61843-022CA	0022		61805-001			
240CA	RIGHT	RIGHT	4.0	61844-040CA	61843-040CA	0040		NONE			
243CA	RIGHT	RIGHT	4.3	61844-043CA	61843-043CA	0043		NONE			
250CA	RIGHT	RIGHT	5.0	61844-050CA	61843-050CA	0050		NONE			
300CA	LEFT	LEFT	0.0	61721-100CA	61373-100CA	0000		NONE			
306CA	LEFT	LEFT	0.6	61844-106CA	61843-106CA	0006		NONE			
320CA	LEFT	LEFT	2.0	61844-120CA	61843-120CA	0020		NONE			
322CA	LEFT	LEFT	2.2	61844-122CA	61843-122CA	0022		NONE			
340CA	LEFT	LEFT	4.0	61844-140CA	61843-140CA	0040		NONE			
343CA	LEFT	LEFT	4.3	61844-143CA	61843-143CA	0043		NONE			
350CA	LEFT	LEFT	5.0	61844-150CA	61843-150CA	0050		NONE			

ORDERING INFORMATION

THREADED INSERT ASSEMBLED BY BERG		
NAME	PART NO.	Q'TY
(A) EJECT HEADER ASS'Y	61720-*****	1
(E) MATING RECEPTACLE	73277-101000	2
THREADED INSERT ASSEMBLED BY CUSTOMER		
NAME	PART NO.	Q'TY
(B) DECK CLOSEST TO PCB	61721-***** or 61844-*****	1
(C) DECK FARTHEST FROM PCB	61373-***** or 61843-*****	1
(D) M2 INSERT	61553-****	2
(E) MATING RECEPTACLE	73277-101000	2

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY	ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection	FCI	
A	T60459	W	L11/18/96	linear	± 0.30	projection	title CARDBUS FOLDABLE	
B	T70023	W	L01/07/97	linear	± 0.30	projection	SPRING BACK, TYPE 1/2/3	
C	T70165	W	L05/03/97	angles	± 2'	projection	product family : PCMCIA	
D	T70191	W	L05/13/97	dr	WENDY CHEN	10/09/96	unit	code
E	T70313	W	L08/08/97	enr	JOSEPH HSIAO	10/09/96	mm/inch	TWN
F	T80183	W	L05/04/98	chr	JOSEPH HSIAO	10/09/96	size	dwg no.
G	T00102	W	L05/09/00	appd	JENN TSAO	10/09/96	scale	1 of 12
sheet	revision	G	G	G	G	G	G	G
index	sheet	1	2	3	4	5	6	7

DESCRIPTION : ABOVE PCB, DECK AND PUSH ROD LOCATION ARE AS VIEW BY USER.

PRODUCT NO.	PUSH ROD LOCATION		STAND-OFF HEIGHT	CLOSEST TO PCB	FARTHEST FROM PCB	THREADED INSERT (2 PCS) ① 61553-***	MATING RECEPTACLE ⑤	P.C.B SIDE	RECOMMENDED P.C.B LAYOUT	MOUNT STYLE TO PCB AND PUSH ROD SIDE
	DECK CLOSEST TO PCB	DECK FARTHEST TO PCB		EJ HDR ASS'Y ②	EJ HDR ASS'Y ③					
④ 61720-*****										
722CA	RIGHT	RIGHT	2.2	61844-522CA	61843-522CA	0022	100 POSITIONS (2x50) 0.8mm RECEPTACLE PART NO. 73277-101000	BELOW	SEE DRAWING NO.: TA-1050	
740CA	RIGHT	RIGHT	4.0	61844-540CA	61843-540CA	0040				
743CA	RIGHT	RIGHT	4.3	61844-543CA	61843-543CA	0043				
750CA	RIGHT	RIGHT	5.0	61844-550CA	61843-550CA	0050				
822CA	LEFT	LEFT	2.2	61844-622CA	61843-622CA	0022				
840CA	LEFT	LEFT	4.0	61844-640CA	61843-640CA	0040				
843CA	LEFT	LEFT	4.3	61844-643CA	61843-643CA	0043				
850CA	LEFT	LEFT	5.0	61844-650CA	61843-650CA	0050				

ORDERING INFORMATION

THREADED INSERT ASSEMBLED BY BERG		
NAME	PART NO.	Q'TY
④ EJECT HEADER ASS'Y	61720-*****	1
⑤ MATING RECEPTACLE	73277-101000	2
THREADED INSERT ASSEMBLED BY CUSTOMER		
NAME	PART NO.	Q'TY
② DECK CLOSEST TO PCB	61844-*****	1
③ DECK FARTHEST FROM PCB	61843-*****	1
① M2 INSERT	61553-****	2
⑤ MATING RECEPTACLE	73277-101000	2

mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection	title
G				angles	± 2°		CARDBUS FOLDABLE SPRING BACK, TYPE 1/2/3
				dr	WENDY CHEN 08/08/97	unit	product family : PCMCIA
				engr	JOSEPH HSIA 08/08/97	mm/inch	code
				chr	JOSEPH HSIA 08/08/97	scale	size
				appd	JENN TSAO 08/08/97	1:1	dwg no.
sheet	revision						A3
Index	sheet						61720
							TWN
							sheet 2 of 2

Tous droits réservés. Toute réimpression ou utilisation non autorisée sans la permission écrite de la propriété intellectuelle de BERG ELECTRONICS est formellement interdite.



All rights reserved. Any reproduction or unauthorized use without the written permission of BERG ELECTRONICS is expressly prohibited.

DESCRIPTION : ABOVE PCB, DECK AND PUSH ROD LOCATION ARE AS VIEW BY USER.

PRODUCT NO.	PUSH ROD LOCATION		STAND-OFF HEIGHT	CLOSEST TO PCB EJ HDR ASS'Y ②	FARTHEST FROM PCB EJ HDR ASS'Y ③	THREADED INSERT (2 PCS) ④ 61553-***	MATING RECEPTACLE ⑤	CHLOROPRANE RUBBER FOAM ⑥	P.C.B SIDE	RECOMMENDED P.C.B LAYOUT	MOUNT STYLE TO PCB AND PUSH ROD SIDE
① 61720-*****	DECK CLOSEST TO PCB	DECK FARTHEST TO PCB									
200CAS	RIGHT	RIGHT	0.0	61844-000CAS	61843-000CAS	0000	100 POSITIONS (2x50) 0.8mm RECEPTACLE PART NO. 73277-101000	NONE	ABOVE	SEE DRAWING NO.: TA-1050	
206CAS	RIGHT	RIGHT	0.6	61844-006CAS	61843-006CAS	0006		NONE			
220CAS	RIGHT	RIGHT	2.0	61844-020CAS	61843-020CAS	0020		NONE			
222CAS	RIGHT	RIGHT	2.2	61844-022CAS	61843-022CAS	0022		NONE			
240CAS	RIGHT	RIGHT	4.0	61844-040CAS	61843-040CAS	0040		NONE			
243CAS	RIGHT	RIGHT	4.3	61844-043CAS	61843-043CAS	0043		NONE			
250CAS	RIGHT	RIGHT	5.0	61844-050CAS	61843-050CAS	0050		NONE			
300CAS	LEFT	LEFT	0.0	61844-100CAS	61843-100CAS	0000		NONE			
306CAS	LEFT	LEFT	0.6	61844-106CAS	61843-106CAS	0006		NONE			
320CAS	LEFT	LEFT	2.0	61844-120CAS	61843-120CAS	0020		NONE			
322CAS	LEFT	LEFT	2.2	61844-122CAS	61843-122CAS	0022		NONE			
340CAS	LEFT	LEFT	4.0	61844-140CAS	61843-140CAS	0040		NONE			
343CAS	LEFT	LEFT	4.3	61844-143CAS	61843-143CAS	0043		NONE			
350CAS	LEFT	LEFT	5.0	61844-150CAS	61843-150CAS	0050		NONE			

ORDERING INFORMATION

THREADED INSERT ASSEMBLED BY BERG		
NAME	PART NO.	Q'TY
① EJECT HEADER ASS'Y	61720-*****	1
⑤ MATING RECEPTACLE	73277-101000	2
THREADED INSERT ASSEMBLED BY CUSTOMER		
NAME	PART NO.	Q'TY
② DECK CLOSEST TO PCB	61844-*****	1
③ DECK FARTHEST FROM PCB	61843-*****	1
④ M2 INSERT	61553-****	2
⑤ MATING RECEPTACLE	73277-101000	2




mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection	title	product family : PCMCIA	code
G				angles	± 2'		CARDBUS FOLDABLE		TWN
							SPRING BACK, FORCE- SAVING		sheet
				dr WENDY CHEN	05/04/98	unit			3 of
				enr JOSEPH HSIA	05/04/98	mm/inch			
				chr JOSEPH HSIA	05/04/98	scale			
				appd JENN TSAO	05/04/98	1:1			
sheet	revision								
index	sheet								

Tous droits réservés. Reproduction ou utilisation sans autorisation écrite de la propriété.
 All rights reserved. Reproduction or use without written authority from the proprietor.
 Property of a BERG ELECTRONICS.
 Copyright BERG ELECTRONICS by



All rights reserved. Reproduction or use in third parties is not permitted without written authority from the proprietor.
 Property of a BERG ELECTRONICS.
 Copyright BERG ELECTRONICS by


PRODUCT NO.
 SEE TABLE A

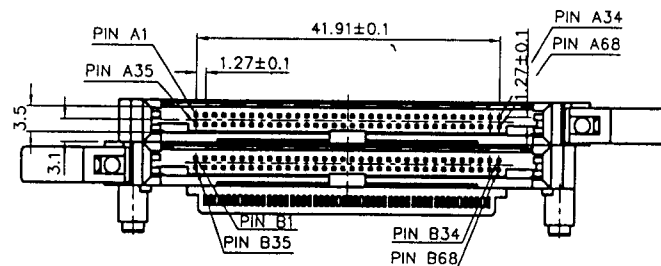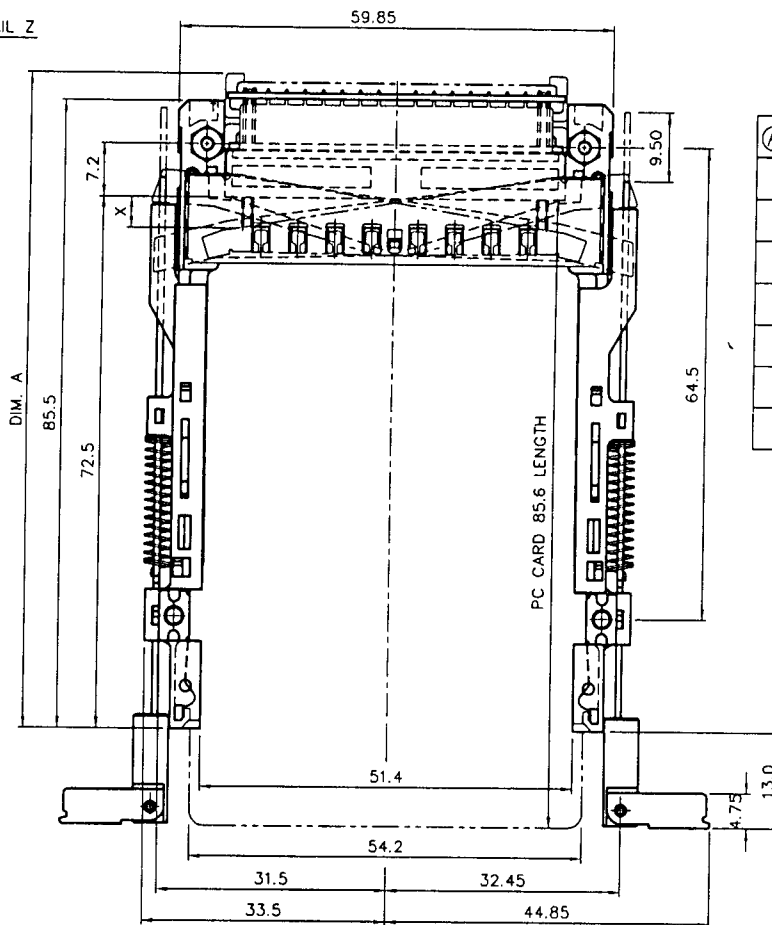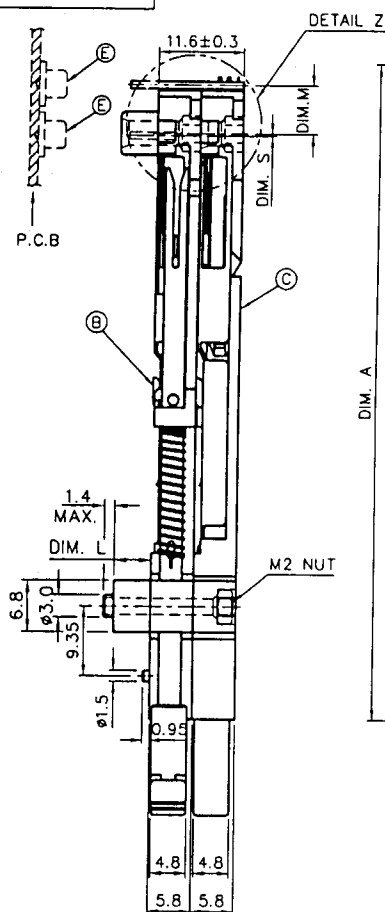

P/N: 61720-0*CA
 (ABOVE P.C.B/LAYOUT SEE TA-1050)

TABLE A

① PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
61720-050CA	5.0 mm	-0.3	6.55	89.25
-043CA	4.3 mm	-0.3	6.55	89.25
-040CA	4.0 mm	-0.3	6.55	89.25
-022CA	2.2 mm	1.0	7.85	90.55
-020CA	2.0 mm	1.0	7.85	90.55
-006CA	0.6 mm	5.5	12.35	95.05
-000CA	NONE	5.5	12.35	95.05



THREADED INSERT CAN BE
 ASSEMBLED BY BERG OR BY
 CUSTOMER

DETAIL Z




mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		ELECTRONICS 	
rev.	ecn no.	dr	date	linear	± 0.30	projection 	title CARDBUS FOLDABLE SPRING BACK, TYPE 1/2/3		
G									
				angles	± 2°	scale 	product family : PCMCIA size dwg no. A3 61720		
		dr	WENDY CHEN	10/09/96	unit	mm/inch		code	
		enqr	JOSEPH HSIA	10/09/96				TWN	
		chr	JOSEPH HSIA	10/09/96				sheet	
		appd	JENN TSAO	10/09/96				4 of	
sheet	revision								
index	sheet								

Tous droits réservés. Reproduction ou communication à des tiers sans autorisation écrite de BERG ELECTRONICS.
 All rights reserved. Reproduction or communication to third parties in any form without written authority from the proprietor.
 Copyright BERG ELECTRONICS by



All rights reserved. Reproduction or use to third parties in any form without written authority from the proprietor.
 Copyright BERG ELECTRONICS by


PRODUCT NO.
 SEE TABLE A

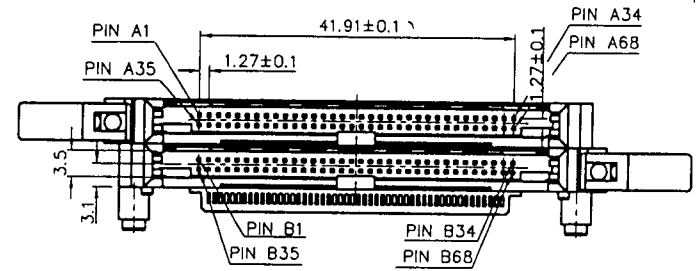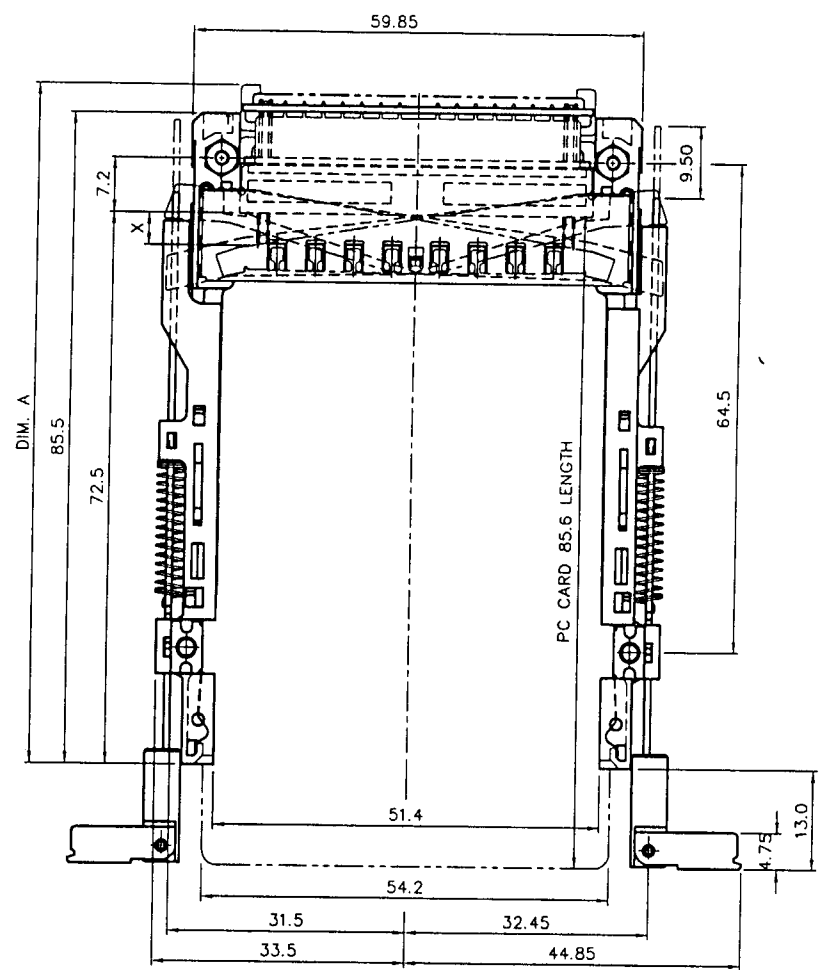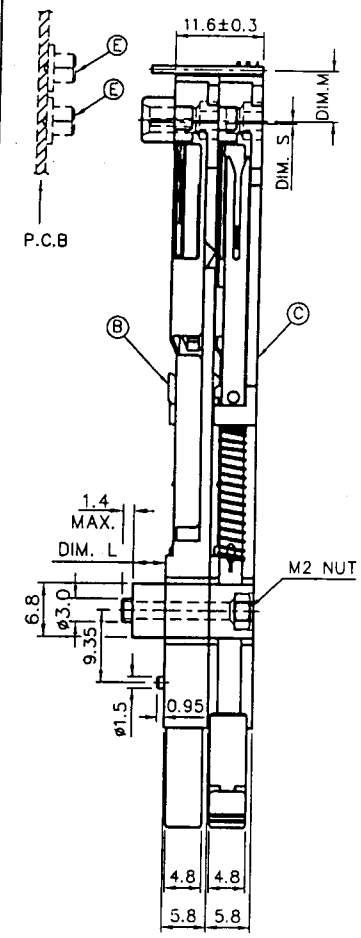

P/N: 61720-1**CA
 (ABOVE P.C.B/LAYOUT SEE TA-1050)

TABLE A

① PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
61720-150CA	5.0 mm	-0.3	6.55	89.25
-143CA	4.3 mm	-0.3	6.55	89.25
-140CA	4.0 mm	-0.3	6.55	89.25
-122CA	2.2 mm	1.0	7.85	90.55
-120CA	2.0 mm	1.0	7.85	90.55
-106CA	0.6 mm	5.5	12.35	95.05
-100CA	NONE	5.5	12.35	95.05



THREADED INSERT CAN BE ASSEMBLED BY BERG OR BY CUSTOMER

DETAIL Z




mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
rev.	ecn	no.	dr	date	linear	± 0.30	projection	TITLE CARDBUS FOLDABLE	
G					angles	± 2°		SPRING BACK, TYPE 1/2/3	
					dr	WENDY CHEN 10/09/96	unit	product family : PCMCIA	
					engr	JOSEPH HSIA 10/09/96	mm/inch	code	
					chr	JOSEPH HSIA 10/09/96	scale	size	
					appd	JENN TSAO 10/09/96		dwg no.	
sheet		revision						A3	
index		sheet						61720	
								TWN	
								sheet	
								5 of	

Tous droits réservés. Reproduction ou utilisation sans autorisation écrite de la propriété de BERG ELECTRONICS. Droits de reproduction BERG ELECTRONICS by



All rights strictly reserved. Reproduction or use in third parties is not permitted without written authority from the proprietor. Property of BERG ELECTRONICS. Copyright BERG ELECTRONICS by


PRODUCT NO.
SEE TABLE A

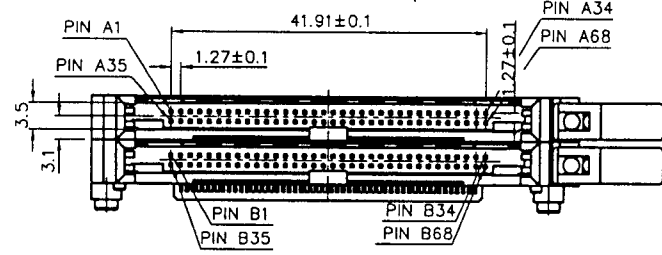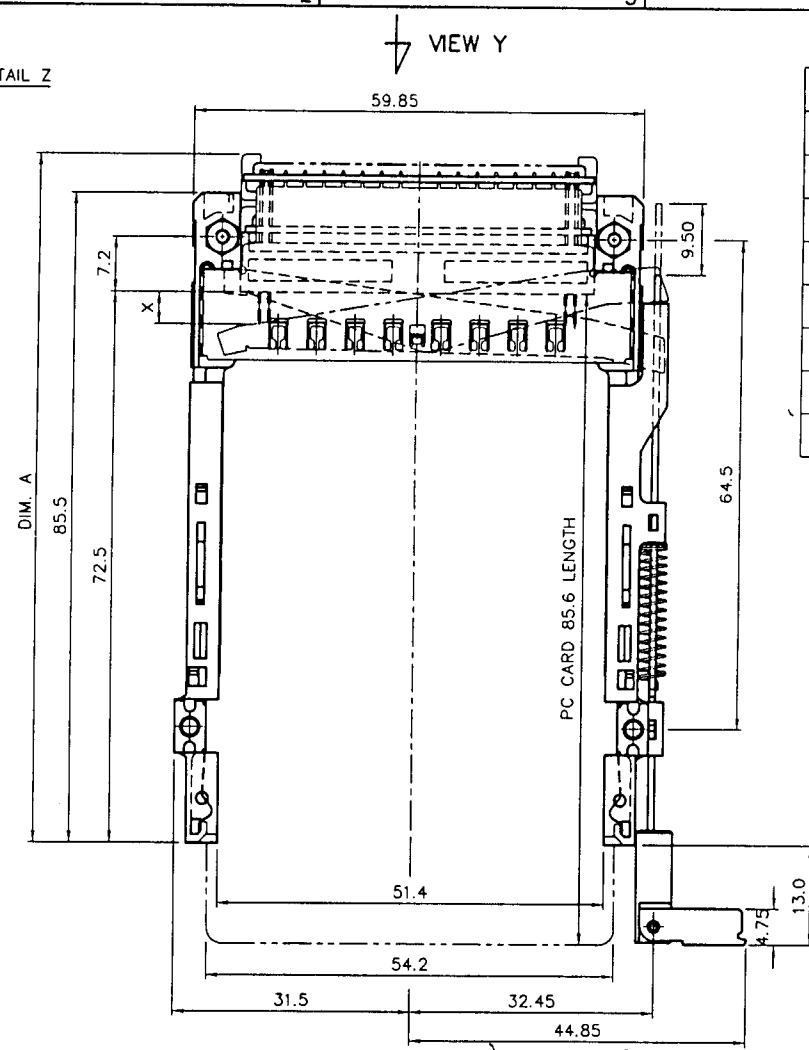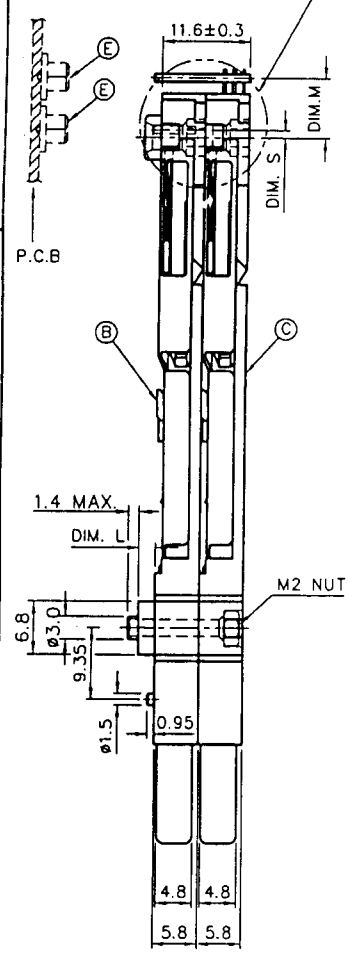

P/N : 61720-2**CA
(ABOVE P.C.B/LAYOUT SEE TA-1050)


TABLE A

PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
Ⓐ 61720-250CA	5.0 mm	-0.3	6.55	89.25
-243CA	4.3 mm	-0.3	6.55	89.25
-240CA	4.0 mm	-0.3	6.55	89.25
-222CA	2.2 mm	1.0	7.85	90.55
-222CAM	2.2 mm	1.0	7.85	90.55
-220CA	2.0 mm	1.0	7.85	90.55
-206CA	0.6 mm	5.5	12.35	95.05
-200CA	NONE	5.5	12.35	95.05

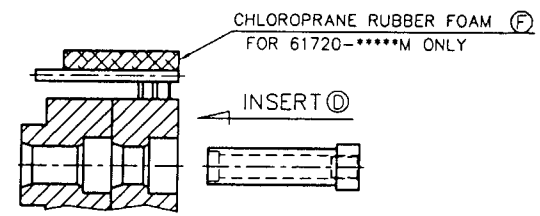

THREADED INSERT CAN BE ASSEMBLED BY BERG OR BY CUSTOMER

DETAIL Z

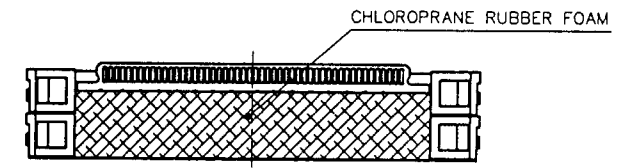




VIEW Y
FOR 61720-*****M ONLY

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection		FCI	
G				angles	± 2°			TITLE CARD BUS FOLDABLE SPRING BACK, TYPE 1/2/3	
				dr	WENDY CHEN 10/09/98	unit		product family : PCMCIA	
				enr	JOSEPH HSIAO 10/09/98	mm/inch		size	
				chr	JOSEPH HSIAO 10/09/98	scale		dwg no.	
				appd	JENN TSAO 10/09/98			A3	
sheet	revision							61720	
index	sheet							TWN sheet 6 of	

Tous droits réservés. Reproduction ou utilisation sans autorisation écrite de FCI Electronics.

All rights reserved. Reproduction or use without written authority from FCI Electronics.


PRODUCT NO.
SEE TABLE A

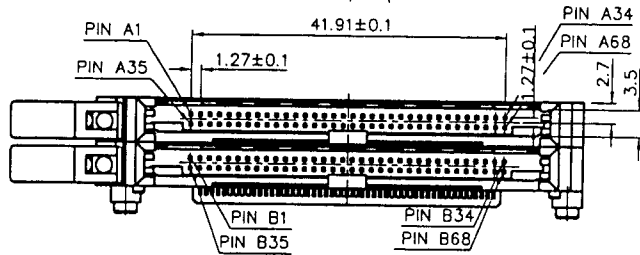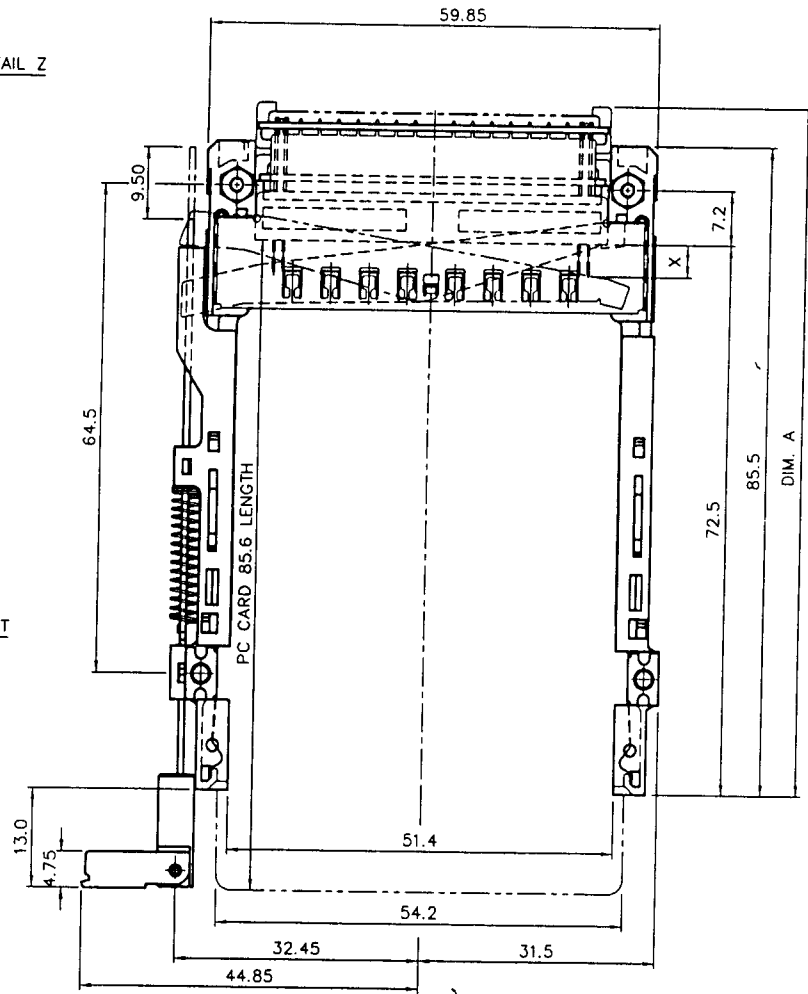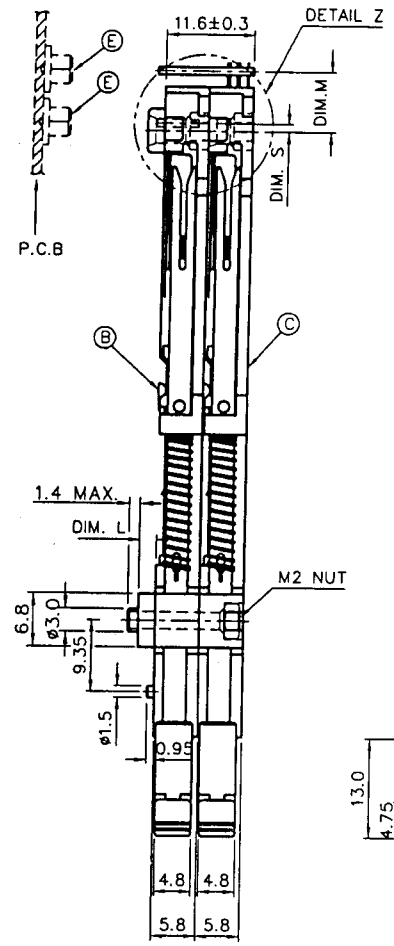

P/N : 61720-3**CA
(ABOVE P.C.B./LAYOUT SEE TA-1050)

TABLE A

PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
① 61720-350CA	5.0 mm	-0.3	6.55	89.25
-343CA	4.3 mm	-0.3	6.55	89.25
-340CA	4.0 mm	-0.3	6.55	89.25
-322CA	2.2 mm	1.0	7.85	90.55
-320CA	2.0 mm	1.0	7.85	90.55
-306CA	0.6 mm	5.5	12.35	95.05
-300CA	NONE	5.5	12.35	95.05



THREADED INSERT CAN BE
ASSEMBLED BY BERG OR BY
CUSTOMER

DETAIL Z




mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection	title
G				angles	± 2°	①	CARDBUS FOLDABLE SPRING BACK, TYPE 1/2/3
				dr	WENDY CHEN 10/09/96	unit	product family : PCMCIA
				enr	JOSEPH HSIAO 10/09/96	mm/inch	code
				chr	JOSEPH HSIAO 10/09/96	scale	TWN
				appd	JENN TSAO 10/09/96	A3	sheet
				sheet	revision	61720	7 of
				index	sheet		



Tous droits réservés. Reproduction ou utilisation sans autorisation écrite de BERG ELECTRONICS Inc. est formellement interdite.

All rights reserved. Reproduction or use in any form without written authority from the proprietor. Copyright BERG ELECTRONICS Inc.


PRODUCT NO.
SEE TABLE A

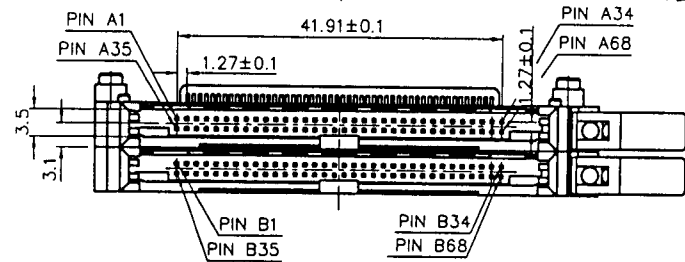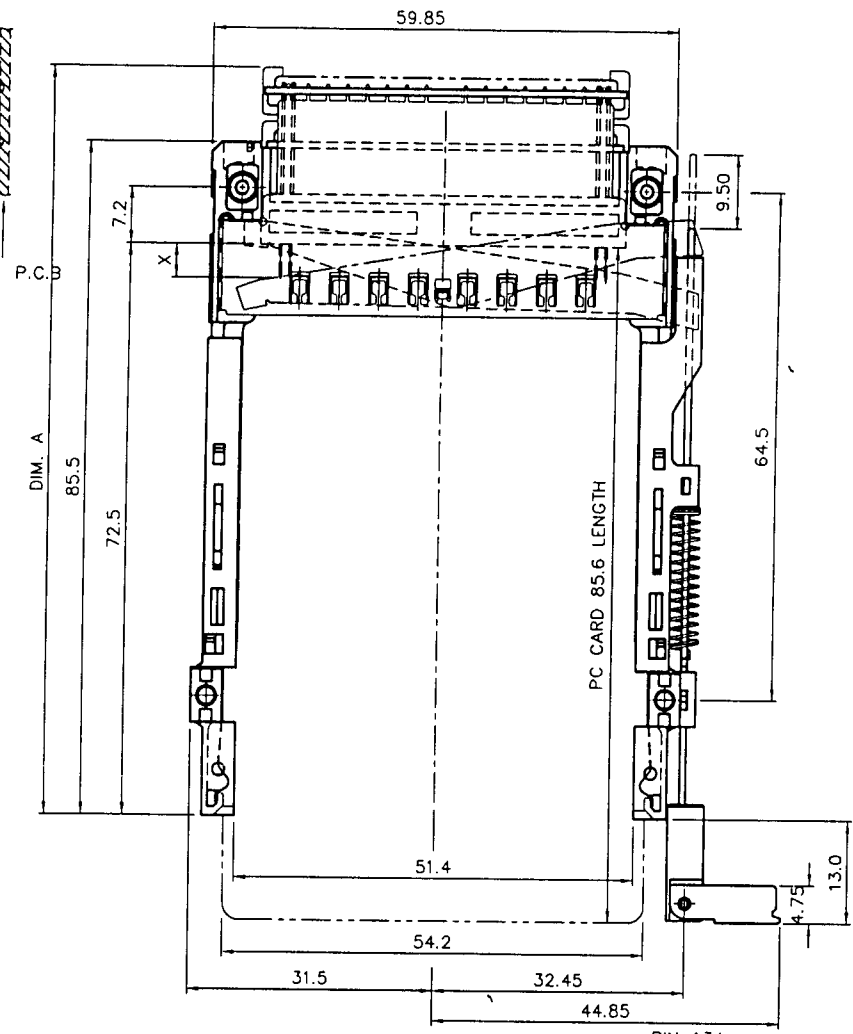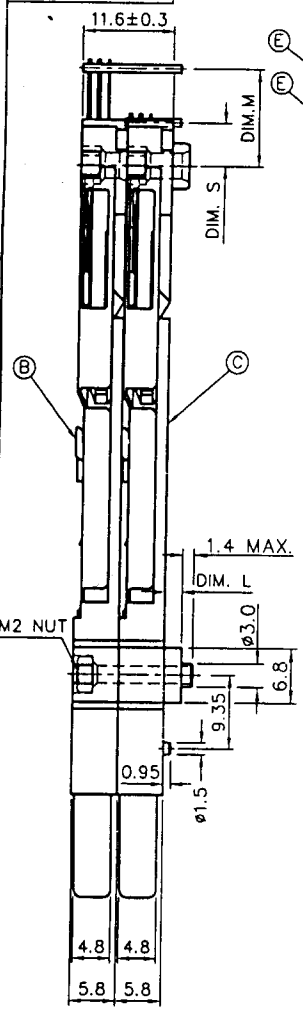

P/N : 61720-7**CA
(BELOW P.C.B/LAYOUT SEE TA-1050)

TABLE A

① PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
61720-750CA	5.0 mm	-0.3	6.55	89.25
-743CA	4.3 mm	-0.3	6.55	89.25
-740CA	4.0 mm	-0.3	6.55	89.25
-722CA	2.2 mm	5.5	12.35	95.05



THREADED INSERT CAN BE ASSEMBLED BY BERG OR BY CUSTOMER

DETAIL Z

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection	unit	FCI	
G				angles	± 2°		mm/inch	CARD BUS FOLDABLE	
				dr	WENDY CHEN 05/15/97			SPRING BACK, TYPE 1/2/3	
				engr	JOSEPH HSI 05/15/97			product family : PCMCIA	
				chr	JOSEPH HSI 05/15/97			code	
				appd	JENN TSAO 05/15/97			size	
sheet	revision			scale	1.5:1			dwg no.	
index	sheet							A3	
								61720	
								sheet	
								8 of	

Tous droits réservés. Reproduction ou utilisation sans autorisation écrite de BERG ELECTRONICS.
 All rights reserved. Reproduction or use without written authority from BERG ELECTRONICS.
 Copyright BERG ELECTRONICS

All rights reserved. Reproduction or use without written authority from BERG ELECTRONICS.
 Copyright BERG ELECTRONICS


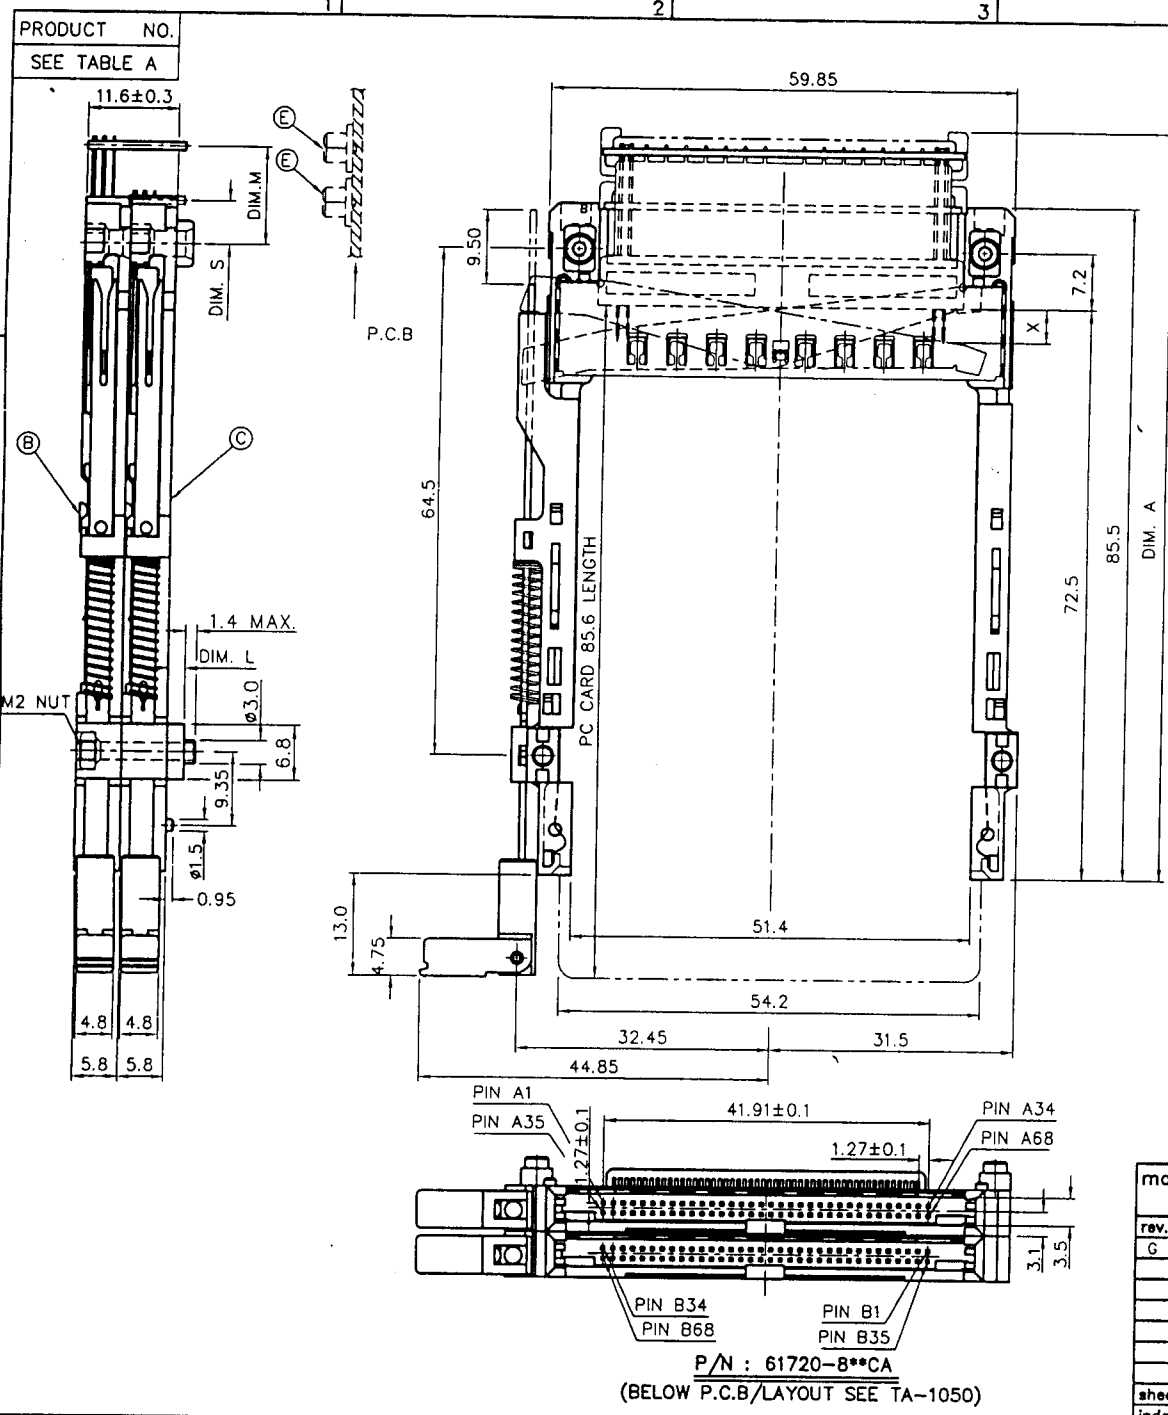


TABLE A

① PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
61720-850CA	5.0 mm	-0.3	6.55	89.25
-843CA	4.3 mm	-0.3	6.55	89.25
-840CA	4.0 mm	-0.3	6.55	89.25
-822CA	2.2 mm	5.5	12.35	95.05



THREADED INSERT CAN BE ASSEMBLED BY BERG OR BY CUSTOMER

DETAIL Z

mat'l code		tolerance unless otherwise specified		CUSTOMER COPY	ELECTRONICS	
rev.	ecn. no.	dr	date	linear	projection	FCI
G				± 0.30		
				angles	± 2°	
		dr	WENDY CHEN 05/15/97	unit	mm/inch	USE CARDBUS FOLDABLE SPRING BACK, TYPE 1/2/3
		enqr	JOSEPH HSIAD 05/15/97	size	dwg no.	product family : PCMCIA
		chr	JOSEPH HSIAD 05/15/97	scale	1:5:1	code
		appd	JENN TSAO 05/15/97			TWN
sheet	revision					9 of
index	sheet					

P/N : 61720-8**CA
 (BELOW P.C.B./LAYOUT SEE TA-1050)

All rights strictly reserved. Reproduction or use in third parties is not permitted without written authority from the proprietor.
 Tous droits strictement réservés. Reproduction ou utilisation à des fins tierces sans autorisation écrite du propriétaire.
 Copyright BERG ELECTRONICS
 Droits de reproduction BERG ELECTRONICS by

PRODUCT NO.
 SEE TABLE A


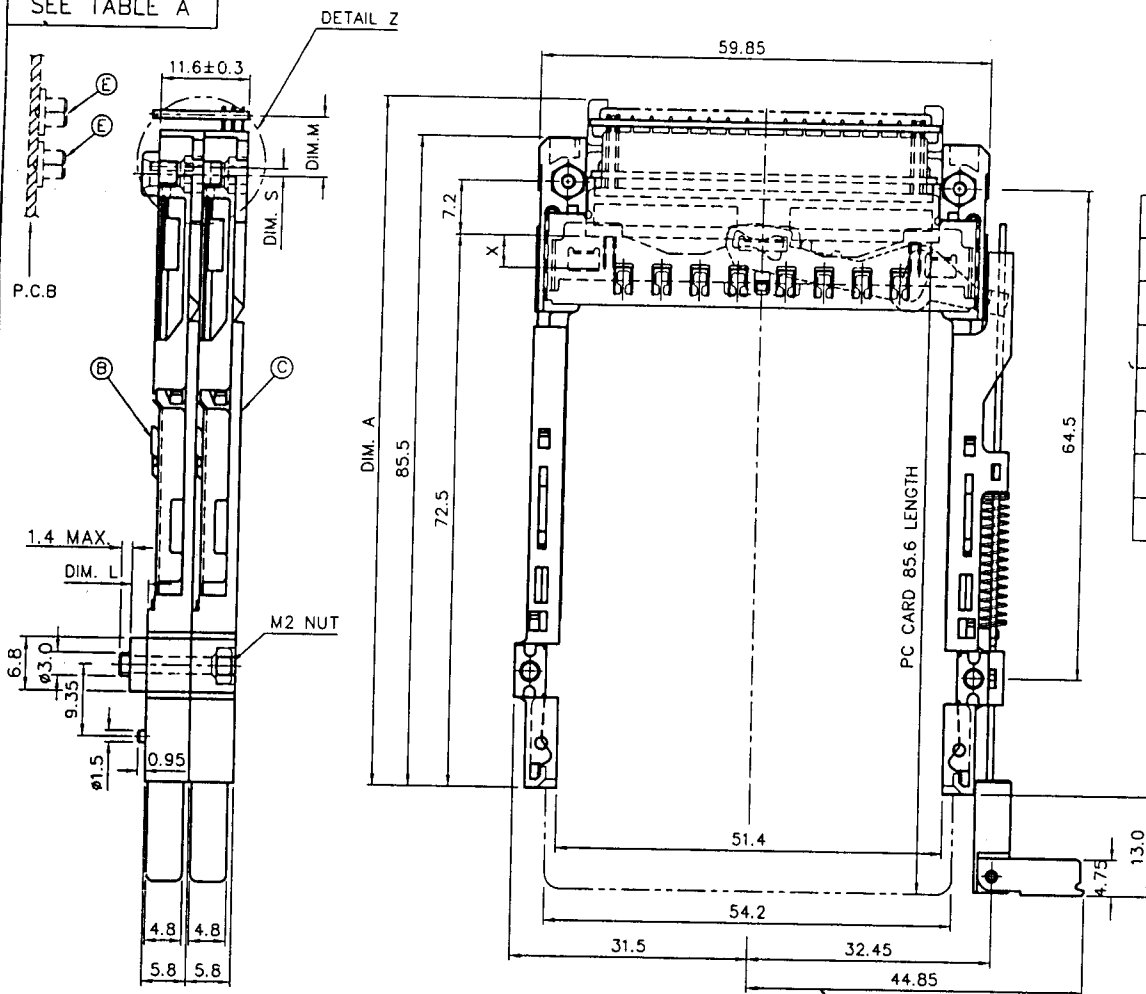



TABLE A

PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
Ⓐ 61720-250CAS	5.0 mm	-0.3	6.55	89.25
-243CAS	4.3 mm	-0.3	6.55	89.25
-240CAS	4.0 mm	-0.3	6.55	89.25
-222CAS	2.2 mm	1.0	7.85	90.55
-220CAS	2.0 mm	1.0	7.85	90.55
-206CAS	0.6 mm	5.5	12.35	95.05
-200CAS	NONE	5.5	12.35	95.05

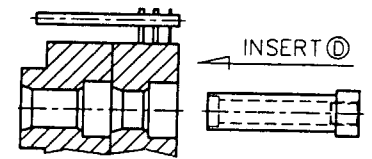

THREADED INSERT CAN BE
 ASSEMBLED BY BERG OR BY
 CUSTOMER

DETAIL Z

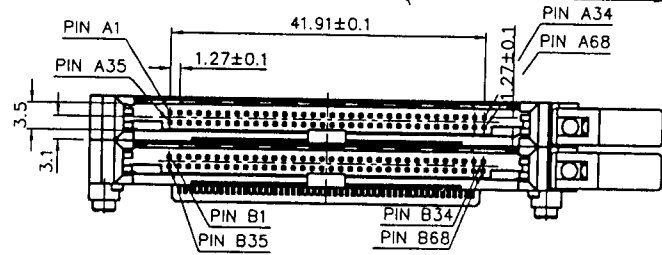

P/N : 61720-2**CAS
 (ABOVE P.C.B/LAYOUT SEE TA-1050)

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection	unit	mm/inch	scale
G									
				angles	± 2°				
		dr	WENDY CHEN	10/09/96					
		enqr	JOSEPH HSIA	10/09/96					
		chr	JOSEPH HSIA	10/09/96					
		appd	JENN TSAO	10/09/96					
sheet	revision								
index	sheet								



title CARDBUS FOLDABLE
 SPRING BACK, FORCE-SAVING
 product family : PCMCIA
 size dwg no. 61720
 code TWN
 sheet 10 of




Tous droits réservés. Toute réimpression ou reproduction sans autorisation écrite de BERG ELECTRONICS est formellement interdite.



All rights reserved. Reproduction or issue in third parties in any form without written authority from the proprietor.

Copyright BERG ELECTRONICS


PRODUCT NO.
SEE TABLE A

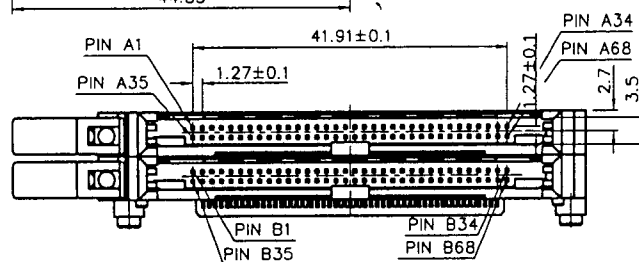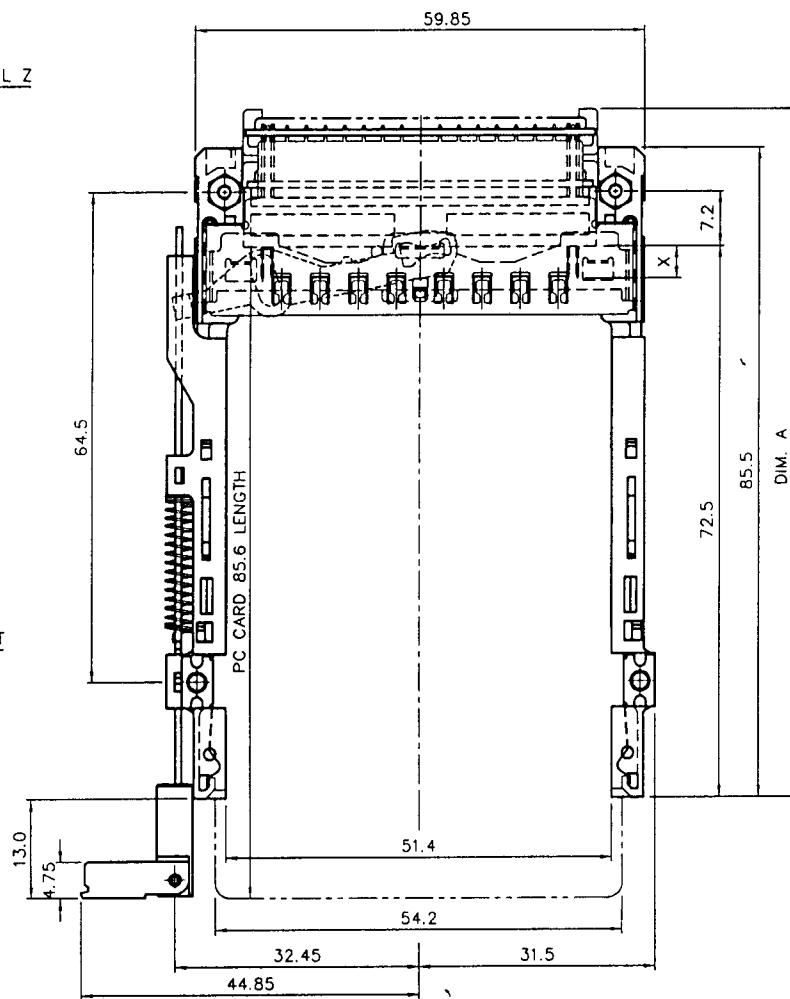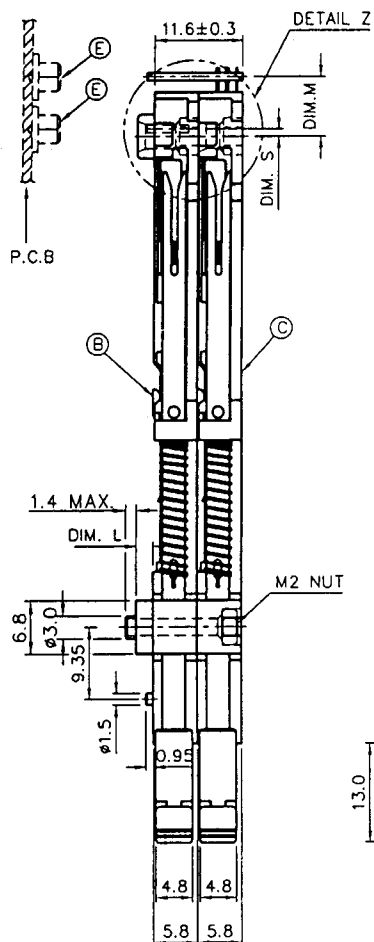

P/N : 61720-3**CAS
(ABOVE P.C.B/LAYOUT SEE TA-1050)

TABLE A

PRODUCT NO.	STAND-OFF(DIM. L)	DIM. S	DIM. M	DIM. A
Ⓐ 61720-350CAS	5.0 mm	-0.3	6.55	89.25
-343CAS	4.3 mm	-0.3	6.55	89.25
-340CAS	4.0 mm	-0.3	6.55	89.25
-322CAS	2.2 mm	1.0	7.85	90.55
-320CAS	2.0 mm	1.0	7.85	90.55
-306CAS	0.6 mm	5.5	12.35	95.05
-300CAS	NONE	5.5	12.35	95.05



THREADED INSERT CAN BE
ASSEMBLED BY BERG OR BY
CUSTOMER

DETAIL Z

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
rev.	ecn no.	dr	date	linear	± 0.30	projection	unit	CARDUS FOLDABLE	
G				angles	± 2°		mm/inch	SPRING BACK, FORCE-SAVING	
				dr	WENDY CHEN/05/04/98		scale	product family : PCMCIA	code
				engr	JOSEPH HSIA/05/04/98			size dwg no.	TWN
				chr	JOSEPH HSIA/05/04/98			A3	61720
				appd	JENN TSAO/05/04/98			sheet	11 of
sheet	revision			index	sheet				

PART NUMBER DESCRIPTION :

61720-□□□□□□

CARDBUS TYPE
S : FORCE-SAVING ONLY

BUTTON COLOR
A : BLACK

C : 13.0 mm

STAND-OFF

00 : 0.0 mm
06 : 0.6 mm
20 : 2.0 mm
22 : 2.2 mm
40 : 4.0 mm
43 : 4.3 mm
50 : 5.0 mm

PUSH ROD

TOP MOUNT	BOTTOM MOUNT
0 : RIGHT-LEFT	
1 : LEFT-RIGHT	
2 : RIGHT-RIGHT	7 : RIGHT-RIGHT
3 : LEFT-LEFT	8 : LEFT-LEFT

NOTES:

- 8.0mm MIN CARD EJECT.
- EJECT TRAVEL: 9.50mm
- MATERIAL:
 - EJECT HEADER ASS'Y
 PLASTIC HOUSING: LCP UL94V-0 BLACK
 PIN: PHOSPHOR BRONZE
 PCB: FR4
 PLASTIC GUIDE: POLYPHTHARAMID UL94V-0 BLACK
 PLATE: STAINLESS
 EMI CONTACT: PHOSPHOR BRONZE
 - RECEPTACLE
 PLASTIC: LCP 94V-0 NATURAL
 PIN: BeCu
- FINISH
 PIN :
 UNDER PLATING: 0.5um MIN. Ni
 CONTACT AREA: 0.1um MIN. GOLD OVER
 0.5um MIN. Pd-Ni
 SOLDER TAIL: 2.5um MIN. Sn-Pb
 GROUND SHIELD :
 UNDER PLATING: 0.75um MIN. Ni
 CONTACT SURFACE: 0.03um GOLD MIN. OVER
 PdNi 0.5um MIN.(GOLD FLASH DOUBLE SIDES)
 OR, 0.2um GOLD(ONE SIDE ONLY)
- PUSH ROD LOCATION AND P.C.B. ARE AS APPEARS INSTALLED
- DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68
- DO NOT TOUCH AND KEEP CLEAN THE SURFACES OF PCB OF HEADER ASS'Y.
- P.C.B LAYOUT AND PIN ASSIGNMENT REFERED TO PART NUMBER TA-1050.

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		FCI ELECTRONICS	
rev.	ecn no.	dr	date	linear		projection		title	
G				±0.30		⊕		CARDBUS FOLDABLE SPRING BACK, TYPE 1/2/3	
				angles ± 2'				product family : PCWGA	
				dr WENDY CHEN 10/09/98		unit		code	
				enqr JOSEPH HSIA 10/09/98		mm/inch		TWN	
				chr JOSEPH HSIA 10/09/98		scale		sheet	
				appd JENN TSAO 10/09/98		1:1		12 of	
sheet revision						A3		61720	
Index sheet									