



High Quality Power Cord


UL Certificated




RoHS
Compliant

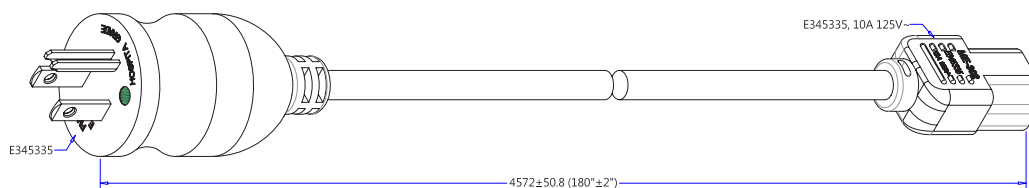

FM-2 (NEMA 5-15P, Hospital Grade)
(Dimensions of Plug Face)

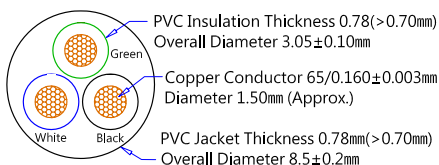

SJT 16AWGx3C
(Wire Cross-Section)



ME-302 (IEC 60320, C13, 13A 125V~)
(Dimensions of Connector Face)

Dimensions : Millimetres

| Plug Component | | |
|----------------------|--|-----|
| Colour | Component | Qty |
| 35P (Grey, GY-82) | FM-2 (Nema 5-15P, Hospital Grade) | 1 |
| Nickel-plated | 4.75 "U" GEM 98478BBL-1 U-type Earth Pins Terminal | 1 |
| Nickel-plated | 6.3×15 Solid Blades/ GEM98693ABL-1 | 2 |
| | 18AWG, ID 6mm, (10-13mm) Metal Washer | 3 |

| Dimension | | |
|-----------|-------|-----------|
| Strip | ROJ | Colour |
| 6 +1/-0 | 70 ±2 | Black (L) |
| 6 +1/-0 | 70 ±2 | White (N) |
| 6 +1/-0 | 80 ±2 | Green (E) |

Wire Styles

SJT16AWGx3C
60°C Grey, GY-82
Length : 4,572mm ±50.8mm
180" ±2"

| Connector Component | | |
|--|------|---------------|
| Instruction | Qty. | Colour |
| ME-302 (IEC 60320, C13, 13A, 125V) | 1 | 35p (Black) |
| 2.0 × 4.0 GEM 98740BS-0 (#16-18) Receptacle Terminal | 3 | Brass-Natural |
| GA005-5 (2.0 × 4.0 Serial Housing) | 1 | Off-White |

| Dimensions | | |
|------------|---------|-----------|
| ROJ | Strip | Colour |
| 16±1 | 5 +1/-0 | Black (L) |
| 16±1 | 5 +1/-0 | White (N) |
| 16±1 | 5 +1/-0 | Green (E) |

Dimensions : Millimetres

www.element14.com
www.farnell.com
www.newark.com

