


SAW Bandpass Filter 251911B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40°C ~ 85°C
- Electrostatics Sensitive Device (ESD)


2. Package Dimension

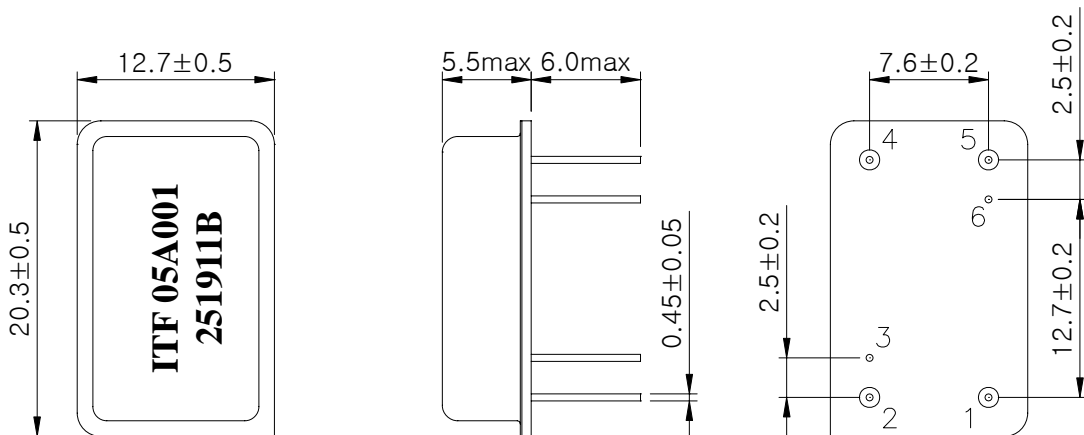

Package : D2012

Dimensions shown are nominal in millimeters
 Base : Fe(SPCC), Au plating over Ni plated
 Cap : Cu & Cr Alloy, Ni Plated
 Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251911B	
		Rev. Date	2005-12-09	
		Rev.	NM5022-CS03	1/5

SAW Bandpass Filter 251911B



3. Specifications

Fo = 190.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	190.0	-
Insertion Loss	dB	-	26.0	28.0
1dB Bandwidth	MHz	-	19.6	-
3dB Bandwidth	MHz	19.8	19.9	-
50dB Bandwidth	MHz	-	21.7	22.0
Amplitude Ripple (Fo +/- 9.375 MHz)	dB	-	0.7	1.0
Group Delay Variation (Fo +/- 9.375 MHz)	nsec	-	50	100
Absolute Delay	usec	-	2.9	-
Ultimate Rejection	dB	50	52	-
Temperature Coefficient of Frequency	ppm/°C	-	-23	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251911B	
		Rev. Date	2005-12-09	
		Rev.	NM5022-CS03	2/5

SAW Bandpass Filter 251911B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

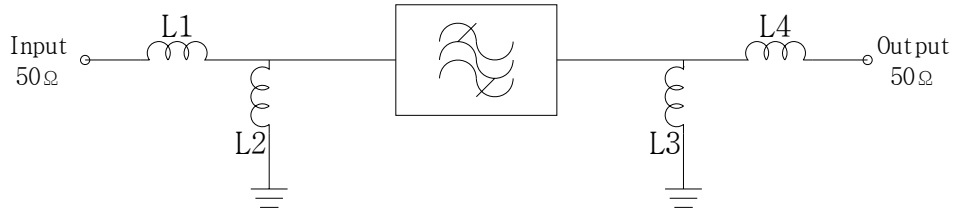


L1 = 27 nH, L2 = 27 nH
L3 = 22 nH, L4 = 27 nH

5. Marking Configuration

ITF¹⁾05A001²⁾
251911B³⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	251911B	
		Rev. Date	2005-12-09	
		Rev.	NM5022-CS03	3/5

SAW Bandpass Filter 251911B







6. Typical Performance (at +25°C)

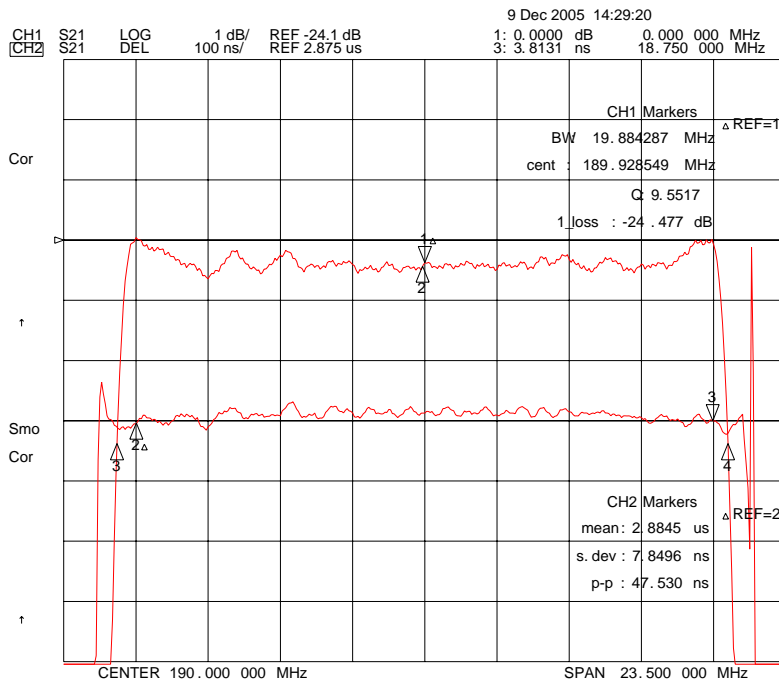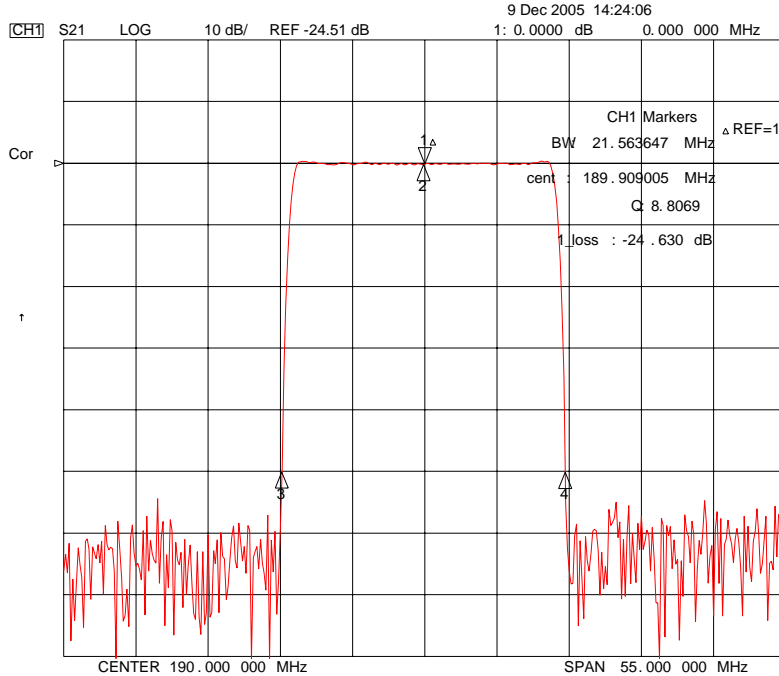

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No.	251911B	
			Rev. Date	2005-12-09	
			Rev.	NM5022-CS03	4/5

SAW Bandpass Filter 251911B

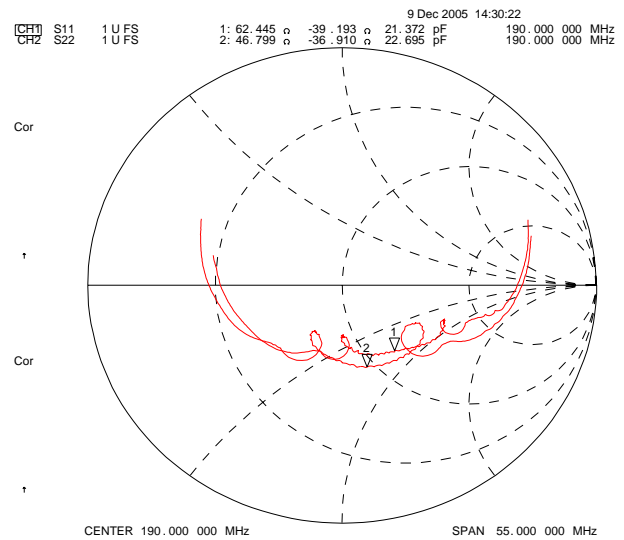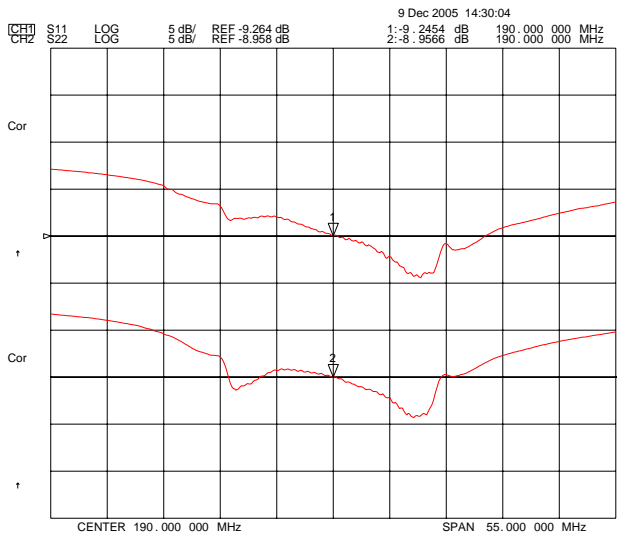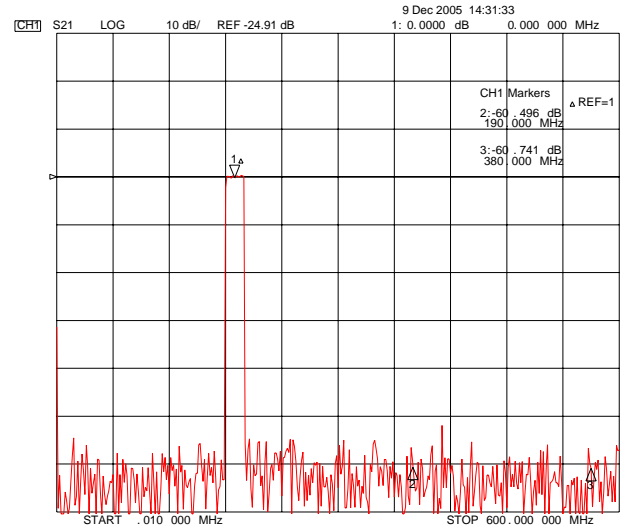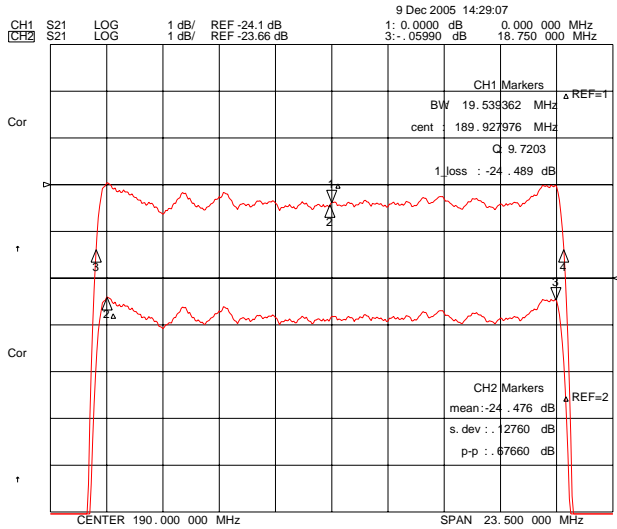

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	251911B	
Rev. Date	2005-12-09	
Rev.	NM5022-CS03	5/5