
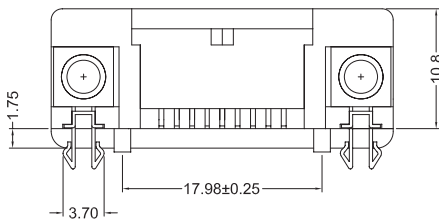
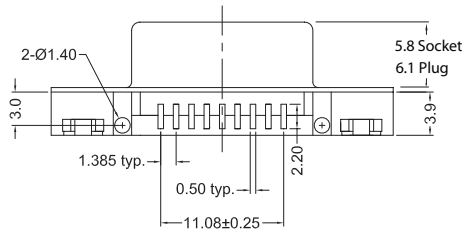


K20XHT Series Right Angle Surface Mount

Dimensions in mm

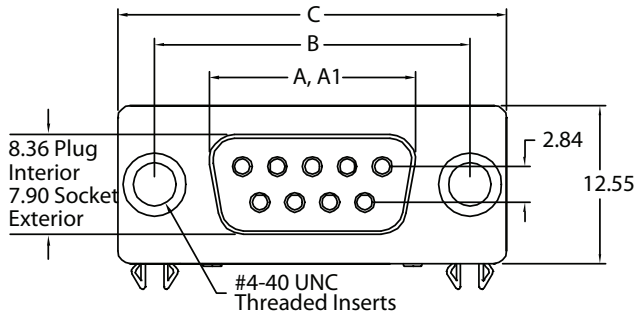

Shell Size	In mm	A	A1	B	C
9 (E)		.643 16.33	.666 16.92	.984 24.99	1.213 30.81
25 (B)		1.511 38.38	1.534 38.96	1.852 47.04	2.088 53.04

A = Exterior of Female Shell (S) A1 = Interior of Male Shell (P)

*Contact factory for specifications. 888-KYCON-22

D-SUBMINIATURE CONNECTORS

K20XHT Series

Documentation & Ordering Information

Kycon Part #

Part Number Builder

K20X	-	B	-	S	-		
Series		Shell Size Contact		Contact Type		Mounting Options	Plating Option

Series

K20XHT - D-Subminiature Connector, Right Angle, Ultra Short Footprint, Surface Mount, Reflow Compatible

Shell Size-Contact Option

E - 9 Contacts

B - 25 Contacts

Contact Type

P - Pin Contact (Plug) Available only with E9 Shell Size option

S - Socket Contact (Receptacle)

Mounting Option

H - With Top only grounding strap with Riveted Threaded Inserts

L - With round Latch

LJ - With round Latch and Jack screw

N - With Board Locks and (4-40) Riveted Threaded Inserts

NJ - With Board Locks, Riveted Threaded Inserts, and

4-40 Hex. Jack Screws Assembled to Connector

Plating Option

Blank - Gold Flash

15 - 15µ" Gold

30 - 30µ" Gold

*Contact Kycon for Other Options