

SL32 THRU SL34


LOW VF SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE - 20 to 40 Volts CURRENT - 3.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals

SMC/DO-214AB

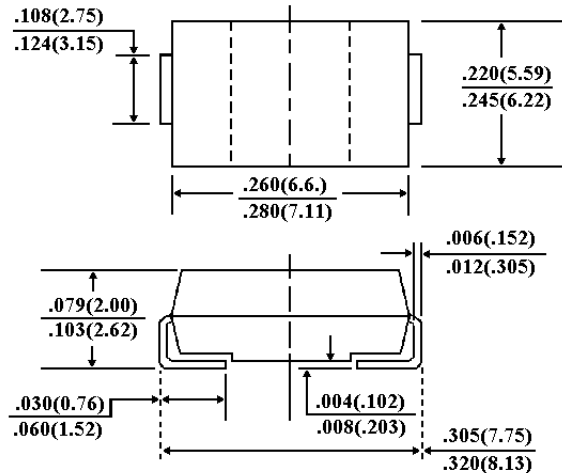

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode

Standard packaging: 16mm tape (EIA-481)

Weight: 0.007 ounce, 0.21 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SL32	SL33	SL34	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	Volts
Maximum Average Forward Rectified Current at T_L (See Figure 1)	$I_{(AV)}$	3.0			Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	100.0			Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	V_F	0.38	0.38	0.40	Volts
Maximum DC Reverse Current $T_A=25$ °C (Note 1) At Rated DC Blocking Voltage $T_A=100$ °C	I_R	0.5 20.0			mA
Maximum Thermal Resistance (Note 2)	$R_{\theta KJL}$ $R_{\theta KJA}$	17 55			°C/W
Operating Junction Temperature Range	T_J	-50 to +125			°C
Storage Temperature Range	T_{STG}	-50 to +150			°C

NOTES:

1. Pulse Test with PW=300 µs, 1% Duty Cycle.
2. Mounted on P.C.Board with 14mm² (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES
SL32 THRU SL34


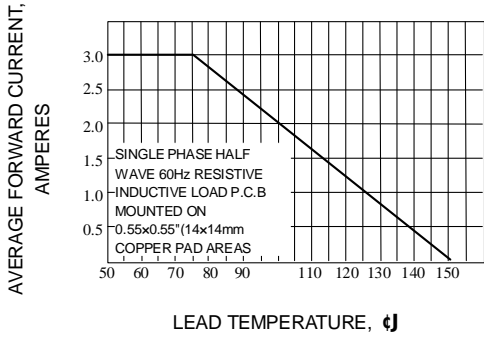


Fig. 1-FORWARD CURRENT DERATING CURVE

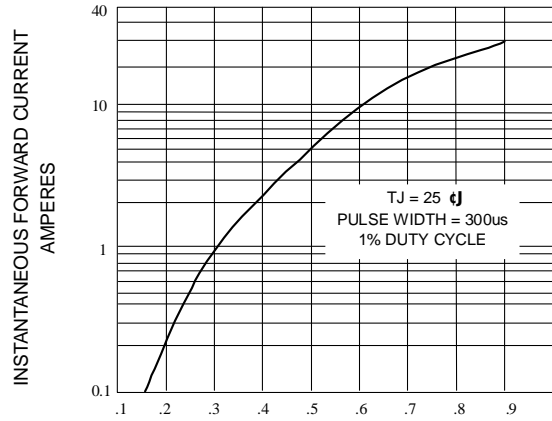

TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

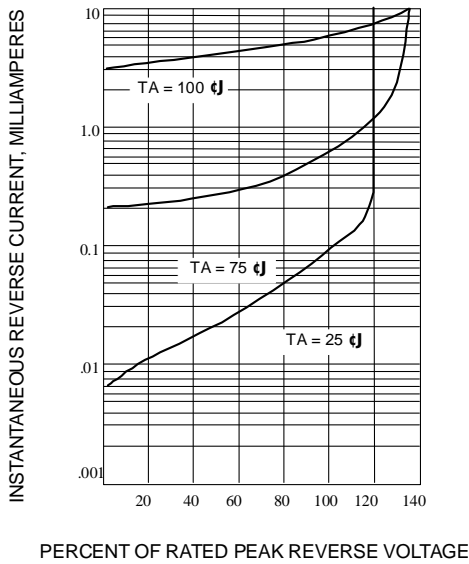


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

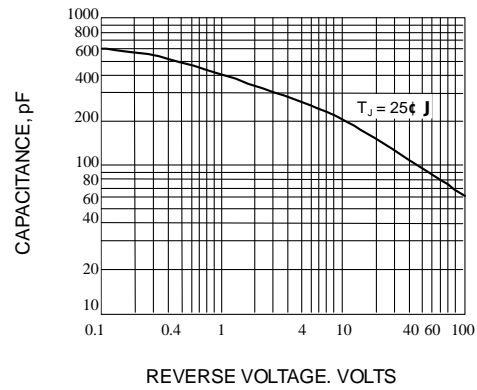


Fig. 4-TYPICAL JUNCTION CAPACITANCE

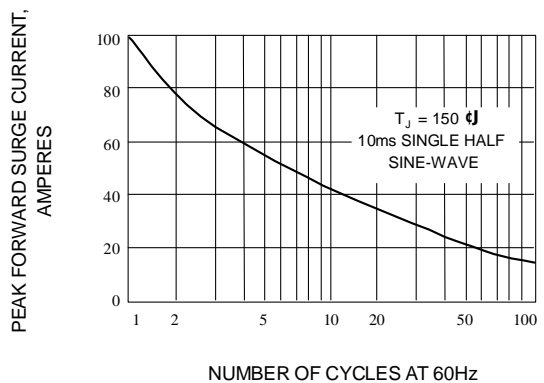


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT