

PACKAGED FLIP CHIP ARRAY

APPLICATIONS

- ✓ Cellular Phones
- ✓ MCM Boards
- ✓ Wireless Communication Circuits
- ✓ IR LEDs
- ✓ SMART & PCMCIA Cards

IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns


FEATURES

- ✓ **CHIP SCALE PACKAGE 0.050" (1.270mm) x 0.030" (0.762mm)**
- ✓ ESD Protection > 25 kilovolts
- ✓ Available in Multiple Voltage Types Ranging From 3.3V to 36V
- ✓ 250 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- ✓ Bidirectional Configuration & Monolithic Structure
- ✓ Protects 1 Line
- ✓ RoHS Compliant in Lead-Free Versions

MECHANICAL CHARACTERISTICS

- ✓ Encapsulated 0502 Chip
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Available in Tin-Lead or Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:
 - Tin-Lead - Sn/Pb, 85/15: 240-245°C
 - Pure-Tin - Sn, 100: 260-270°C
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481
- ✓ Device Marking On Reel

PIN CONFIGURATION





DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	250	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C




ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified						
PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT (See Note 2)	TYPICAL CAPACITANCE @0V, 1 MHz C pF
		@ 1mA $V_{(BR)}$ VOLTS	@ $I_p = 1A$ V_C VOLTS	@ 8/20 μs $V_C @ I_{PP}$	@ V_{WM} I_D μA	
PKFC3.3C	3.3	4.0	7.0	12.5V @ 20A	75*	150
PKFC05C	5.0	6.0	9.8	14.7V @ 17A	10**	100
PKFC08C	8.0	8.5	13.4	19.2V @ 13A	10***	75
PKFC12C	12.0	13.3	19.0	29.7V @ 9.0A	1	50
PKFC15C	15.0	16.7	24.0	35.7V @ 7.0A	1	40
PKFC24C	24.0	26.7	43.0	55.0V @ 5.0A	1	30
PKFC36C	36.0	40.0	64.0	84.0V @ 3.0A	1	25

Note 1: All devices are bidirectional. Electrical characteristics apply in both directions.

Note 2: *Typical leakage current < 5 μA @ 2.8V. **Typical leakage current < 500nA @ 3.3V. ***Typical leakage current < 200nA @ 5V.

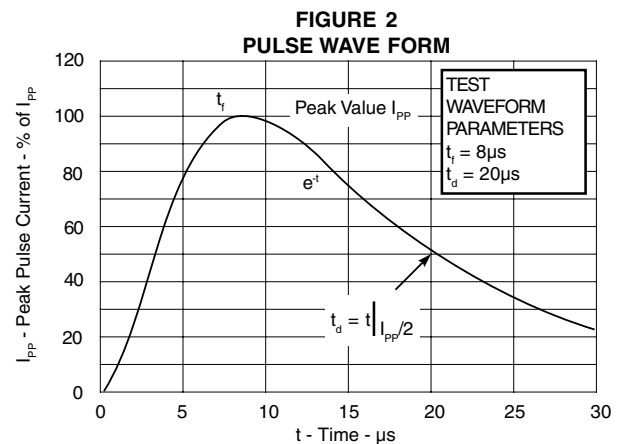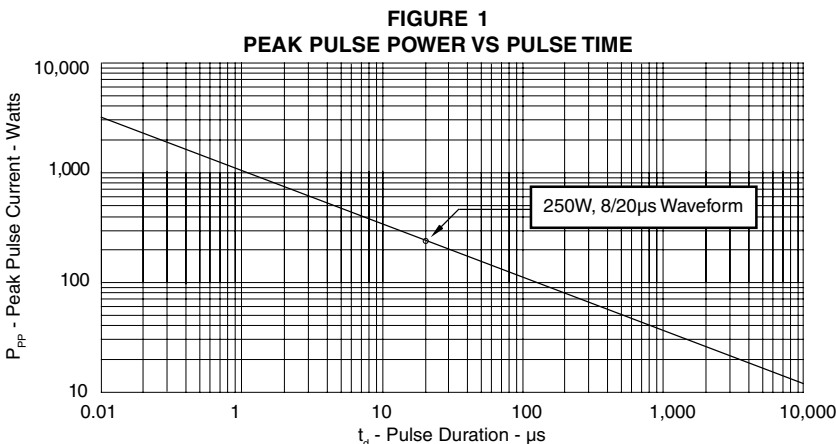

GRAPHS

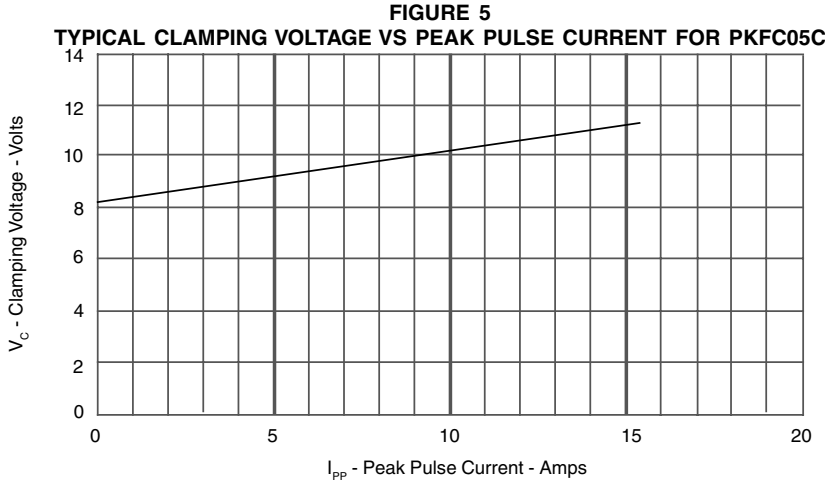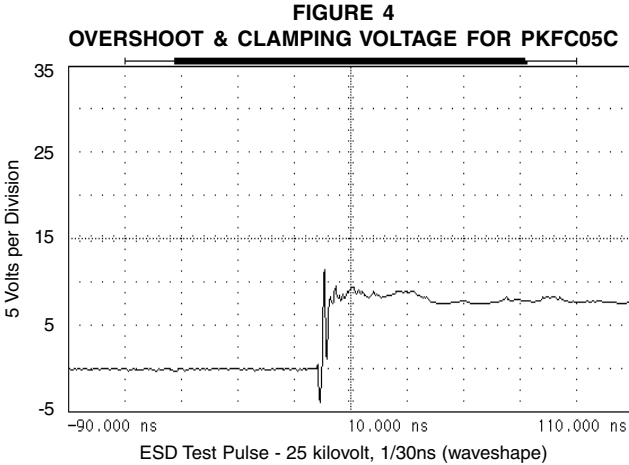
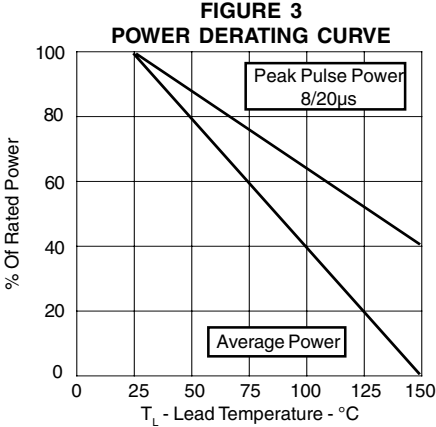


APPLICATION INFORMATION

PRINTED CIRCUIT BOARD RECOMMENDATIONS	
PARAMETER	VALUE
Pad Size on PCB	0.275mm
Pad Shape	Round
Pad Definition	Non-Solder Mask Defined Pads
Solder Mask Opening	0.325mm Round
Solder Stencil Thickness	0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.330mm Round
Solder Paste Type	No Clean
Pad Protective Finish	OSP(Entek Cu Plus 106A)
Tolerance - Edge To Corner Ball	±50µm
Solder Ball Side Coplanarity	±20µm
Maximum Dwell Time Above Liquidous (183°C)	60 Seconds
Soldering Maximum Temperature	270°C

REQUIREMENTS
<p>Temperature: T_p for Lead-Free (SnAgCu): 260-265°C T_p for Tin-Lead: 240-245°C Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area & plating.</p>

RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION

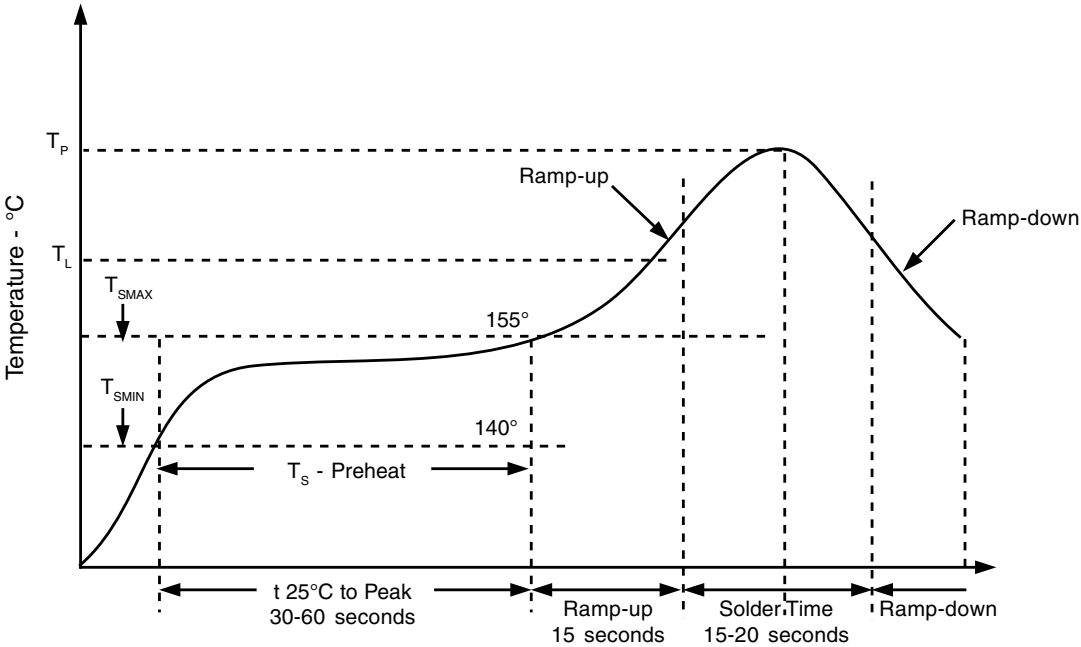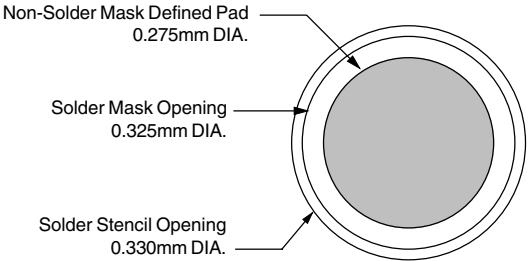

PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE		PACKAGE DIMENSIONS		
		DIM	MILLIMETERS	INCHES
		A	0.838	0.033
		B	1.245	0.049
		C	0.762	0.030
		D	0.533	0.021
		E	0.228	0.009
		F	0.533	0.021
		G	0.305	0.012
		H	0.432	0.017
		J	0.432	0.017
K	0.355	0.014		
NOTES				
1. Controlling dimensions in inches. 2. Decimal tolerances for mounting pad : ± 0.003" (± 0.08mm). 3. Maximum size: 0.052" (1.321mm) by 0.036" (0.914mm). 4. All dimensions ±0.003" on package outline.				
MOUNTING PAD		PAD DIMENSIONS		
		DIM	MILLIMETERS	INCHES
		A	1.016	0.040
		B	0.635	0.025
		C	1.473	0.058
		E	0.203	0.008
		F	0.508	0.020
G	0.343	0.0135		
J	0.343	0.0135		
TAPE & REEL ORIENTATION				
NOTE				
1. Top view of tape. Solder PADS face down in tape package.				
Outline & Dimensions: Rev 1 - 8/03, 06040				

TAPE & REEL ORDERING NOMENCLATURE

1. Surface mount product is taped and reeled in accordance with EIA 481.
2. *8mm Plastic Tape*: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1 (i.e., PKFC05C-T75-1).
3. *8mm Paper Tape*: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-2 (i.e., PKFC05C-T75-2).
4. Suffix - LF = Lead-Free, Pure-Tin Plating, i.e., PKFC05C-LF-T75-2.

COPYRIGHT © ProTek Devices 2005

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
 2929 South Fair Lane, Tempe, AZ 85282
 Tel: 602-431-8101 Fax: 602-431-2288
 E-Mail: sales@protekdevices.com
 Web Site: www.protekdevices.com