


FEATURES

- 25Ω cut-off bus outputs
- 50Ω receiver outputs
- Transmit and receive registers with separate clocks
- 1500ps max. delay from CLK1 to Bus Outputs (BUS)
- 1500ps max. delay from CLK2 to Receiver Outputs (Q)
- Individual bus enable pins
- Internal 75KΩ input pull-down resistors
- Voltage and temperature compensation for improved noise immunity
- Industry standard 100K ECL levels
- Extended supply voltage option:
VEE = -4.2V to -5.5V
- Available in 28-pin PLCC package

DESCRIPTION

The SY100S891 is a 5-bit registered transceiver containing five bus transceivers with both transmit and receive registers. The bus outputs (BUS₀ – BUS₄) are specified for driving a 25 ohm bus and the receive outputs (Q₀ – Q₄) are specified for driving a 50 ohm line. The bus outputs have a normal high level output voltage and a normal low level output voltage when the bus enable (BUSEN₀ – BUSEN₄) is high. However, the output is switched to a cut-off level when a bus-enable is low. This cut-off level is sufficiently low that a relatively high impedance is presented to the bus in order to minimize reflections. There is one bus-enable for each bus driver; a clock (CLK₁) which is common to all five bus driver registers; and a separate clock (CLK₂) which is common to all five receive registers. Data at the D inputs is clocked to the Bus register by a positive transition of CLK₁ and data on the bus is clocked into the Receiver register by a positive transition of CLK₂. A high on the Master Reset clears all registers.


PIN CONFIGURATION

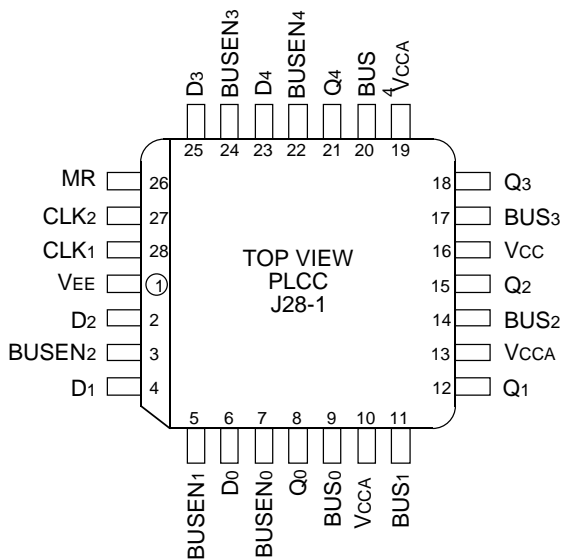

PIN NAMES

Pin	Function
BUSEN ₀₋₄	Bus Enable Inputs
D ₀ – D ₄	Data Inputs
CLK ₁	Bus Driver Clock Input
CLK ₂	Receive Register Clock
MR	Master Reset
Q ₀ – Q ₄	Bus Receive Outputs
BUS ₀₋₄	Bus Outputs

BLOCK DIAGRAM

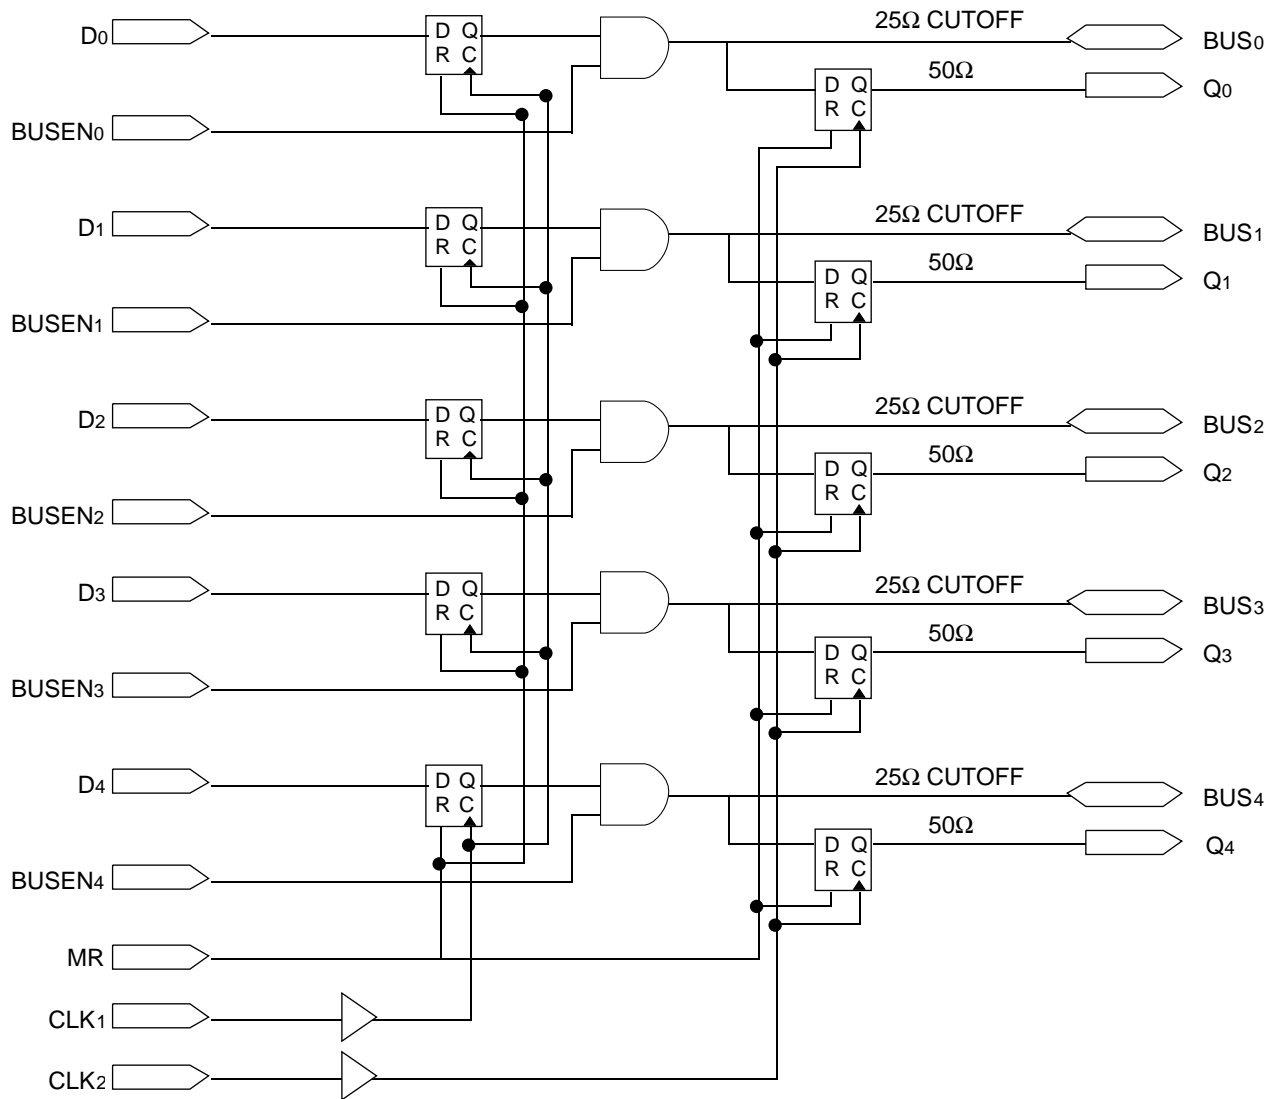

DC ELECTRICAL CHARACTERISTICS

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition	
V _{CUT}	Cut-off Bus Output Voltage	-2200	-2160	-2100	mV	$V_{IN} = V_{IH} (Max.)$ or $V_{IL} (Min.)$	Loading with 25Ω to $-2.20V$
V _{OH}	Output HIGH Voltage Bus	-1025	-955	-880	mV	$V_{IN} = V_{IH} (Max.)$ or $V_{IL} (Min.)$	Loading with 25Ω to $-2.0V$
V _{OL}	Output LOW Voltage Bus	-1810	-1705	-1620	mV		
V _{OHA}	Output HIGH Voltage Bus	-1035	—	—	mV	$V_{IN} = V_{IH} (Min.)$ or $V_{IL} (Max.)$	
V _{OLA}	Output LOW Voltage Bus	—	—	-1610	mV		
V _{OH}	Output HIGH Voltage Receiver	-1025	-955	-880	mV	$V_{IN} = V_{IH} (Max.)$ or $V_{IL} (Min.)$	Loading with 50Ω to $-2.0V$
V _{OL}	Output LOW Voltage Receiver	-1810	-1705	-1620	mV		
V _{OHA}	Output HIGH Voltage Receiver	-1035	—	—	mV	$V_{IN} = V_{IH} (Min.)$ or $V_{IL} (Max.)$	
V _{OLA}	Output LOW Voltage Receiver	—	—	-1610	mV		
V _{IH}	Input HIGH Voltage	-1165	—	-880	mV	Guaranteed HIGH Signal for All Inputs	
V _{IL}	Input LOW Voltage	-1810	—	-1475	mV	Guaranteed LOW Signal for All Inputs	
I _{IL}	Input LOW Current	0.5	—	—	μA	$V_{IN} = V_{IL} (Min.)$	
I _{IH}	Input High Current	—	—	150	μA	$V_{IN} = V_{IH} (Max.)$	
I _{EE}	Power Supply Current	-216	—	—	mA	Inputs Open	
C _{IN}	Input Pin Capacitance	—	4	—	pF		
C _{OUT}	Output Pin Capacitance	—	5	—	pF		

AC ELECTRICAL CHARACTERISTICS

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_A = 0^\circ C$			$T_A = +25^\circ C$			$T_A = +85^\circ C$			Unit	Condition
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.		
tPLH tPHL	Propagation Delay ⁽¹⁾ CLK1 to Bus	600	1000	1500	600	1000	1500	600	1000	1500	ps	
tPLH tPHL	Propagation Delay ⁽²⁾ CLK2 to Q	500	800	1200	500	800	1200	500	800	1200	ps	
tPLH tPHL	Propagation Delay ⁽¹⁾ BUSEN to Bus	500	800	1200	500	800	1200	500	800	1200	ps	
tPLH tPHL	Propagation Delay ⁽¹⁾ Master Reset to Bus	600	1000	1500	600	1000	1500	600	1000	1500	ps	
tPLH tPHL	Propagation Delay ⁽²⁾ Master Reset to Q	500	800	1200	500	800	1200	500	800	1200	ps	
tS	Set-up Time Bus Wrt CLK2 D Wrt CLK1	—	—	400	—	—	400	—	—	400	ps	
		—	—	400	—	—	400	—	—	400		
tREL	Master Reset Release Time	—	—	1000	—	—	1000	—	—	1000	ps	
tH	Hold Time Bus Wrt CLK2 D Wrt CLK1	—	—	400	—	—	400	—	—	400	ps	
		—	—	400	—	—	400	—	—	400		
tr	Output Rise Time Bus ⁽³⁾ Q ⁽⁴⁾	500	—	1000	500	—	1000	500	—	1000	ps	
		300	—	900	300	—	900	300	—	900		
tf	Output Fall Time Bus ⁽³⁾ Q ⁽⁴⁾	500	—	1000	500	—	1000	500	—	1000	ps	
		300	—	900	300	—	900	300	—	900		
tskew	Skew (Maximum difference between slowest and fastest path)	—	100	—	—	100	—	—	100	—	ps	


NOTES:

1. Loaded with 25Ω to $-2.0V$
2. Loaded with 50Ω to $-2.0V$
3. 25Ω Load
4. 50Ω Load

PRODUCT ORDERING CODE

Ordering Code	Package Type	Operating Range
SY100S891JC	J28-1	Commercial
SY100S891JCTR	J28-1	Commercial

28 LEAD PLCC (J28-1)

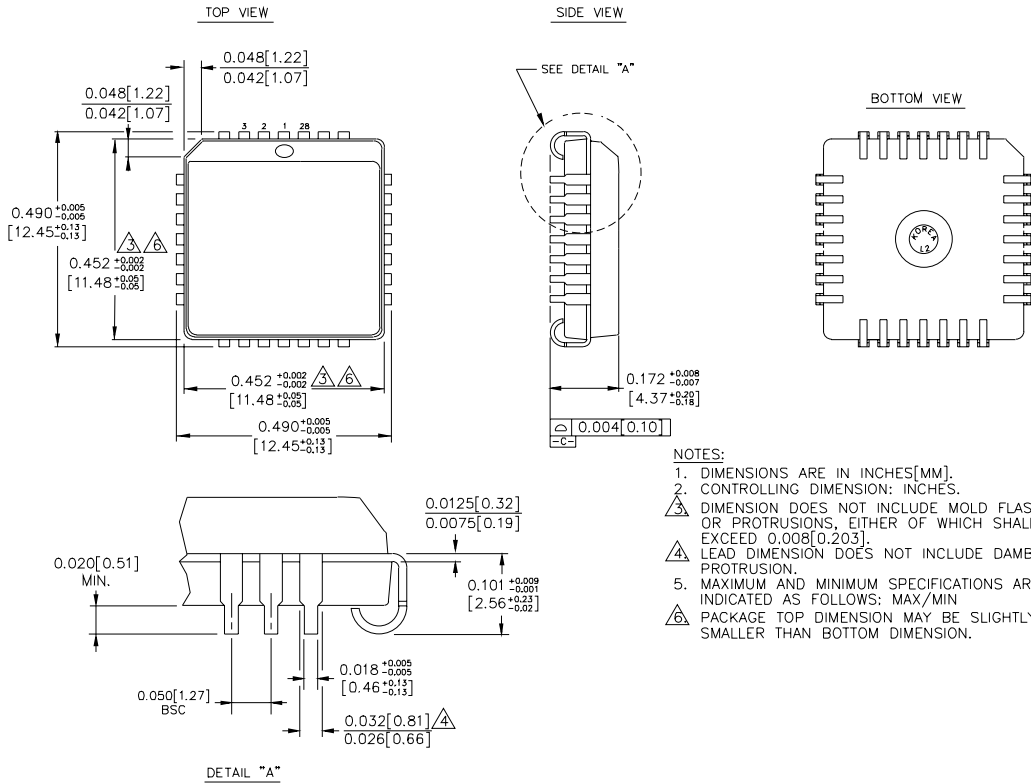

- NOTES:**
1. DIMENSIONS ARE IN INCHES[MM].
 2. CONTROLLING DIMENSION: INCHES.
 3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.008[0.203].
 4. LEAD DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION.
 5. MAXIMUM AND MINIMUM SPECIFICATIONS ARE INDICATED AS FOLLOWS: MAX/MIN
 6. PACKAGE TOP DIMENSION MAY BE SLIGHTLY SMALLER THAN BOTTOM DIMENSION.

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated