



## 5mm Infrared With Special Forming LED ,T-1 3/4

MODEL NO : IR333C/H0/F47

### ■ Features :

- High radiant intensity
- Peak wavelength  $\lambda_p=940\text{nm}$
- View angle  $40^\circ$
- High reliability
- 2.54mm Lead spacing

### ■ Description :

- EVERLIGHT's Infrared Emitting Diode (IR333C/H0/F47) is a high intensity diode, molded in a water clear plastic package.

The device is spectrally matched with phototransistor, photodiode and infrared receiver module.

### ■ Applications :



- Free air transmission system
- Optoelectronic switch
- Floppy disk drive
- Infrared applied system
- Smoke detector

| PART NO. | CHIP     | LENS COLOR  |
|----------|----------|-------------|
|          | MATERIAL |             |
| IR       | GaAlAs   | Water clear |

## 5mm Infrared With Special Forming LED ,T-1 3/4

MODEL NO : IR333C/H0/F47

### ■ Package Dimensions :

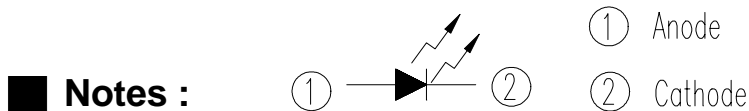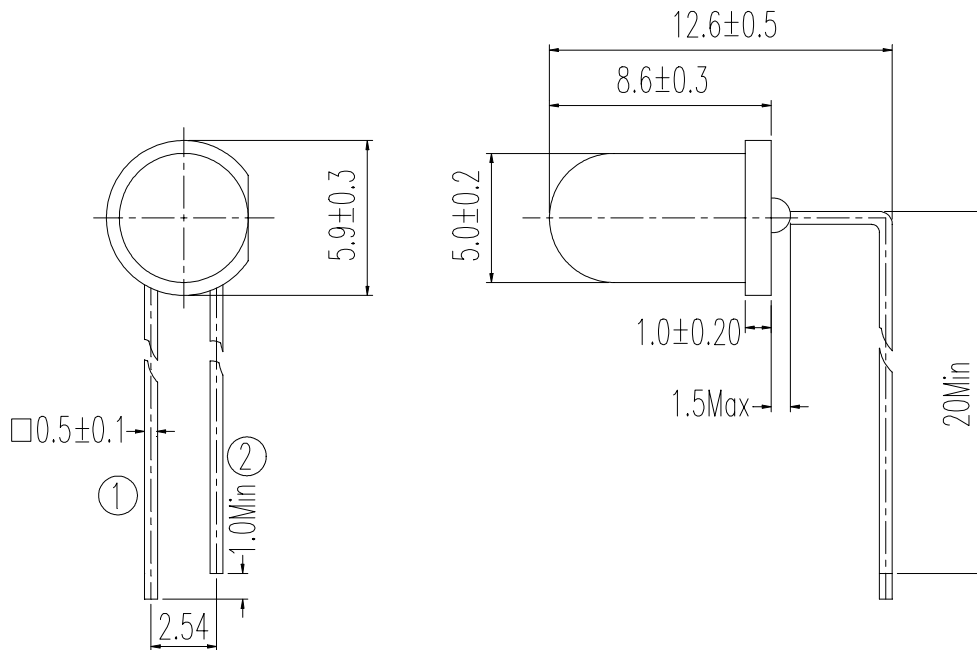

1. All dimensions are in millimeter.
2. Protruded resin under flange 1.5 mm Max.
3. Lead spacing is measured where the lead emerge from the package.
4. Lens color : Water clear.
5. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
6. These specification sheets include materials protected under copyright of EVERLIGHT corporation . Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
7. When using this product , please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.



# EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DIR-033-156    REV : 1.1  
 ECN : \_\_\_\_\_    PAGE : 3/8

## 5mm Infrared With Special Forming LED ,T-1 3/4

MODEL NO : IR333C/H0/F47

### ■ Absolute Maximum Ratings at Ta = 25°C

| Parameter  | Symbol   | Rating    | Unit | Notice |
|--|----------|-----------|------|--------|
| Continuous Forward Current                                     | $I_F$    | 50        | mA   |        |
| Peak Forward Current<br>Pulse width=100 $\mu$ s, Duty cycle=1% | $I_{FP}$ | 1.0       | A    |        |
| Reverse Voltage  | $V_R$    | 5         | V    |        |
| Operating Temperature  | Topr     | -40 ~ +85 | °C   |        |
| Storage Temperature  | Tstg     | -40 ~ +85 | °C   |        |
| Soldering Temperature  | Tsol     | 260       | °C   |        |
| Power Dissipation at(or below)<br>25°C Free Air Temperature    | Pd       | 100       | mW   |        |

### ■ Electronic Optical Characteristics :

| Parameter          | Symbol           | Min. | Typ. | Max. | Unit          | Condition   |
|--------------------|------------------|------|------|------|---------------|---|
| Radiant Intensity  | Ee               | 5.6  | 10   | ---- | mW/sr         | $I_F=20\text{mA}$                                   |
|                    |                  | ---- | 45   | ---- |               | $I_F=100\text{mA}, t_p=100 \mu\text{s}, t_p/T=0.01$ |
|                    |                  | ---- | 400  | ---- |               | $I_F=1\text{A}, t_p=100 \mu\text{s}, t_p/T=0.01$    |
| Peak Wavelength    | $\lambda_p$      | ---- | 940  | ---- | nm            | $I_F=20\text{mA}$                                   |
| Spectral Bandwidth | $\Delta \lambda$ | ---- | 45   | ---- | nm            | $I_F=20\text{mA}$                                   |
| Forward Voltage    | $V_F$            | ---- | 1.2  | 1.5  | V             | $I_F=20\text{mA}$                                   |
|                    |                  | ---- | 1.4  | 1.85 |               | $I_F=100\text{mA}, t_p=100 \mu\text{s}, t_p/T=0.01$ |
|                    |                  | ---- | 2.6  | 4.0  |               | $I_F=1\text{A}, t_p=100 \mu\text{s}, t_p/T=0.01$    |
| Reverse Current    | $I_R$            | ---- | ---- | 10   | $\mu\text{A}$ | $V_R=5\text{V}$                                     |
| View In Angle      | $2\theta_{1/2}$  | ---- | 40   | ---- | deg           | $I_F=20\text{mA}$                                   |



## 5mm Infrared With Special Forming LED ,T-1 3/4

MODEL NO : IR333C/H0/F47

### ■ Typical Electrical/Optical/Characteristics Curves

Fig. 1 Forward Current vs. Ambient Temperature

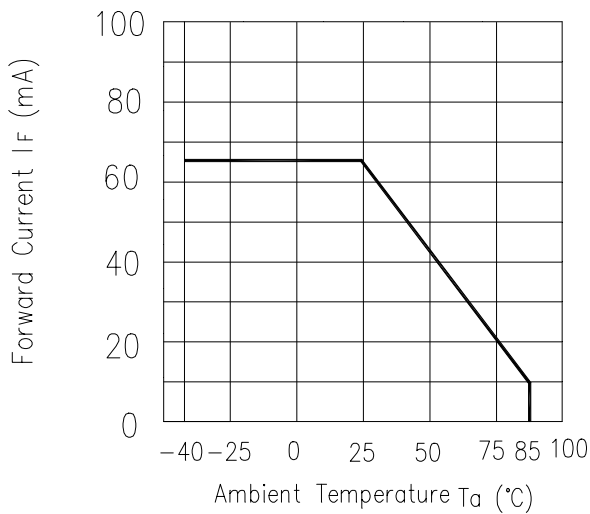


Fig. 2 Spectral Distribution

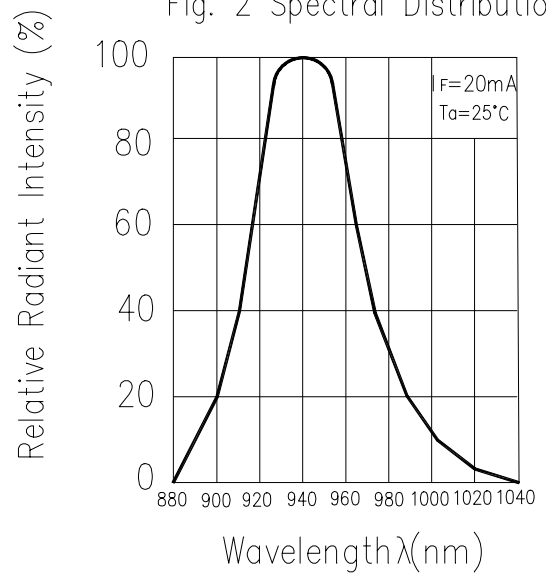


Fig. 3 Peak Emission Wavelength  $\lambda_p$  vs. Ambient Temperature


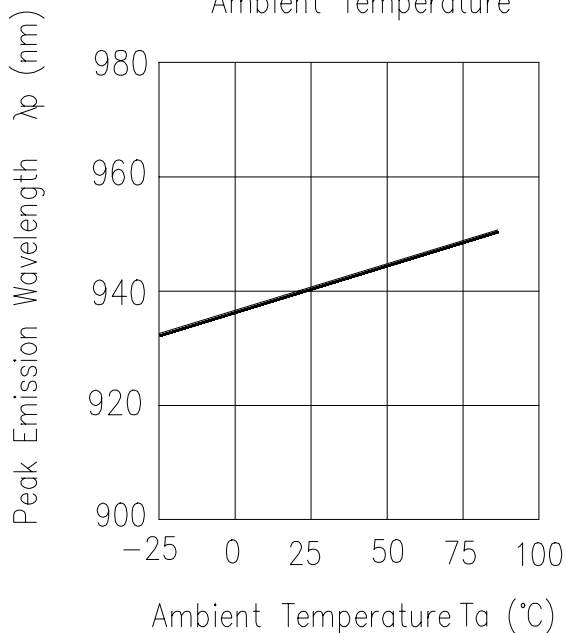


Fig. 4 Forward Current vs. Forward Voltage



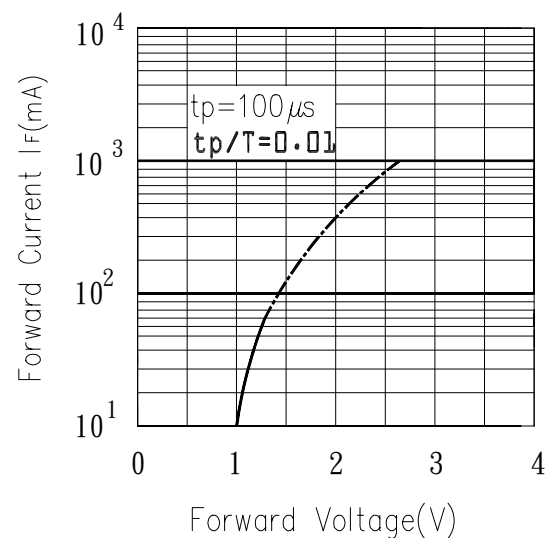

## 5mm Infrared With Special Forming LED ,T-1 3/4

MODEL NO : IR333C/H0/F47

### ■ Typical Electrical/Optical/Characteristics Curves

Fig. 5 Relative Intensity vs. Forward Current

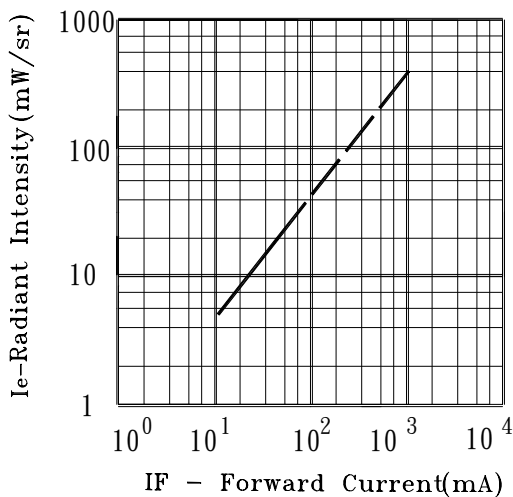


Fig. 6 Relative Radiant Intensity vs. Angular Displacement

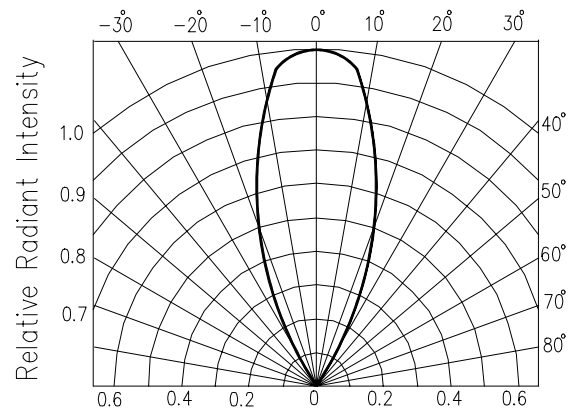


Fig. 7 Relative Intensity vs. Ambient Temperature (°C)


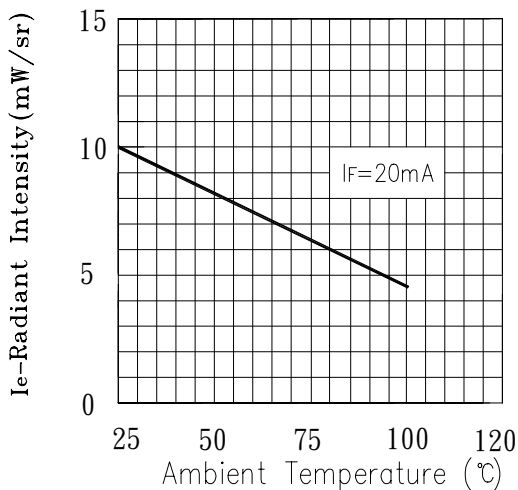


Fig. 8 Forward Current vs. Ambient Temperature (°C)



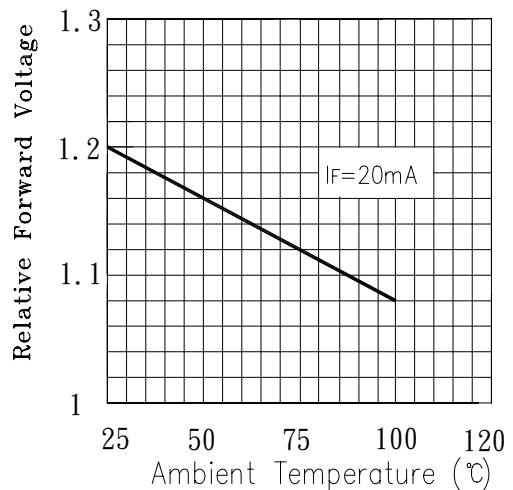

# EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DIR-033-156      REV : 1.1  
 ECN : \_\_\_\_\_      PAGE : 6/8

## 5mm Infrared With Special Forming LED ,T-1 3/4

MODEL NO : IR333C/H0/F47

### ■ Reliability Test Item And Condition

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

| NO. | Item                             | Test Conditions  | Test Hours/<br>Cycles | Sample Size | Failure Judgement Criteria  | Ac/Re |
|-----|----------------------------------|--|-----------------------|-------------|---|-------|
| 1   | Solder Heat                      | TEMP : 260°C ± 5 °C  | 5 secs                | 22 pcs      |   | 0/1   |
| 2   | Temperature Cycle                | H : +85°C    30 mins<br>↑<br>5 mins<br>↓<br>L : -55°C    30 mins | 50 cycles             | 22 pcs      | $I_R \geq U \times 2$<br>$E_e \leq L \times 0.8$<br>$V_F \geq U \times 1.2$ | 0/1   |
| 3   | Thermal Shock                    | H : +100°C    5 mins<br>↑<br>10 secs<br>↓<br>L : -10°C    5 mins | 50 cycles             | 22 pcs      | U :Upper<br>specification<br>limit<br>L :Lower<br>specification<br>limit    | 0/1   |
| 4   | High Temperature Storage         | TEMP. : +100°C   | 1000 hrs              | 22 pcs      |   | 0/1   |
| 5   | Low Temperature Storage          | TEMP. : -55°C  | 1000 hrs              | 22 pcs      |   | 0/1   |
| 6   | DC Operating Life                | $I_F = 20\text{mA}$  | 1000 hrs              | 22 pcs      |   | 0/1   |
| 7   | High Temperature / High Humidity | 85°C / 85% R.H.  | 1000 hrs              | 22 pcs      |   | 0/1   |



**5mm Infrared With Special Forming LED ,T-1 3/4**

MODEL NO : IR333C/H0/F47


---

■ **Test Method For Power :**

Condition :  $I_f=20$  mA

Test Item : Radiant Intensity

Unit : mW/sr

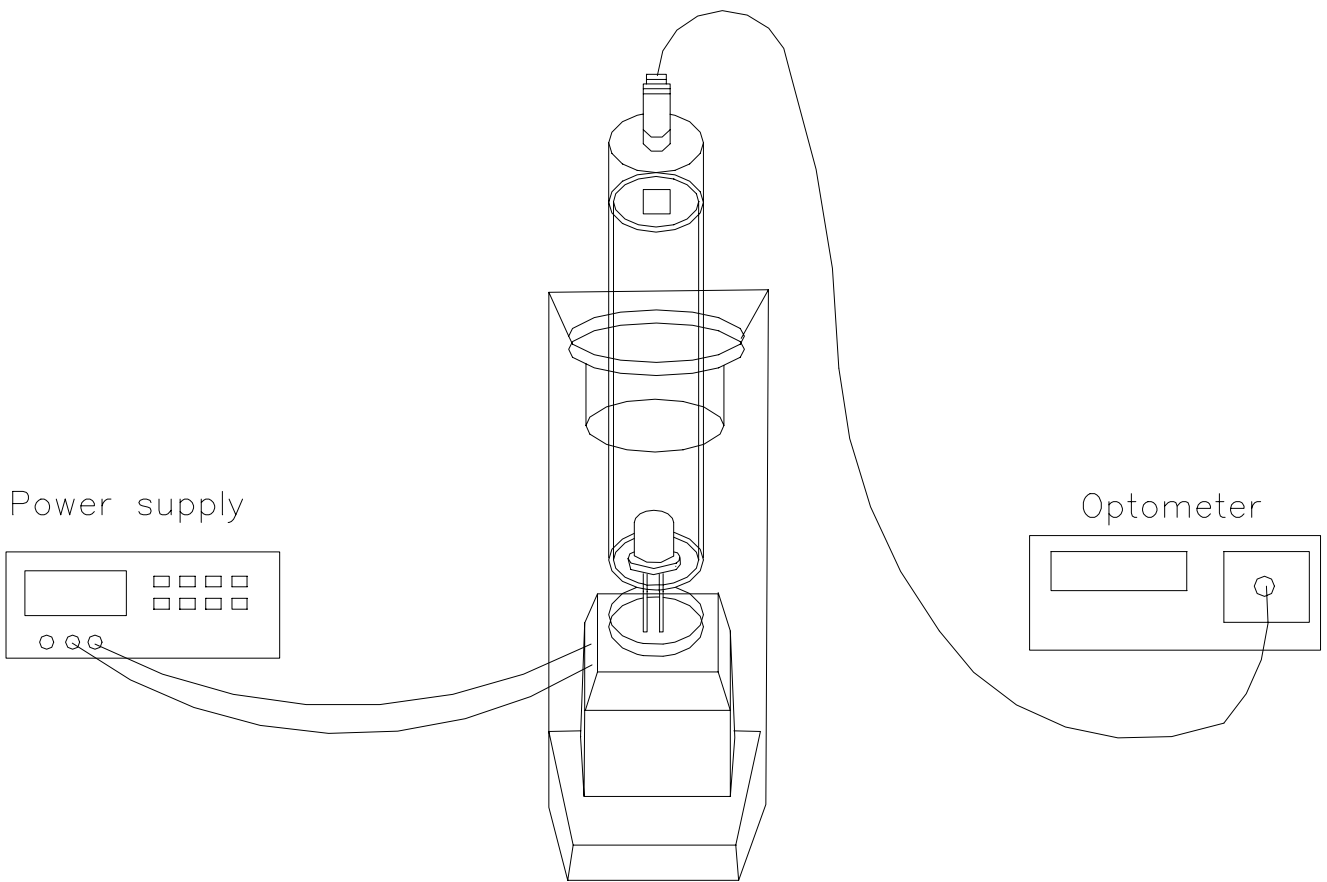




# EVERLIGHT ELECTRONICS CO., LTD.

DEVICE NUMBER : DIR-033-156    REV : 1.1  
ECN : \_\_\_\_\_    PAGE : 8/8

## 5mm Infrared With Special Forming LED ,T-1 3/4

MODEL NO : IR333C/H0/F47

### ■ Packing Specifications

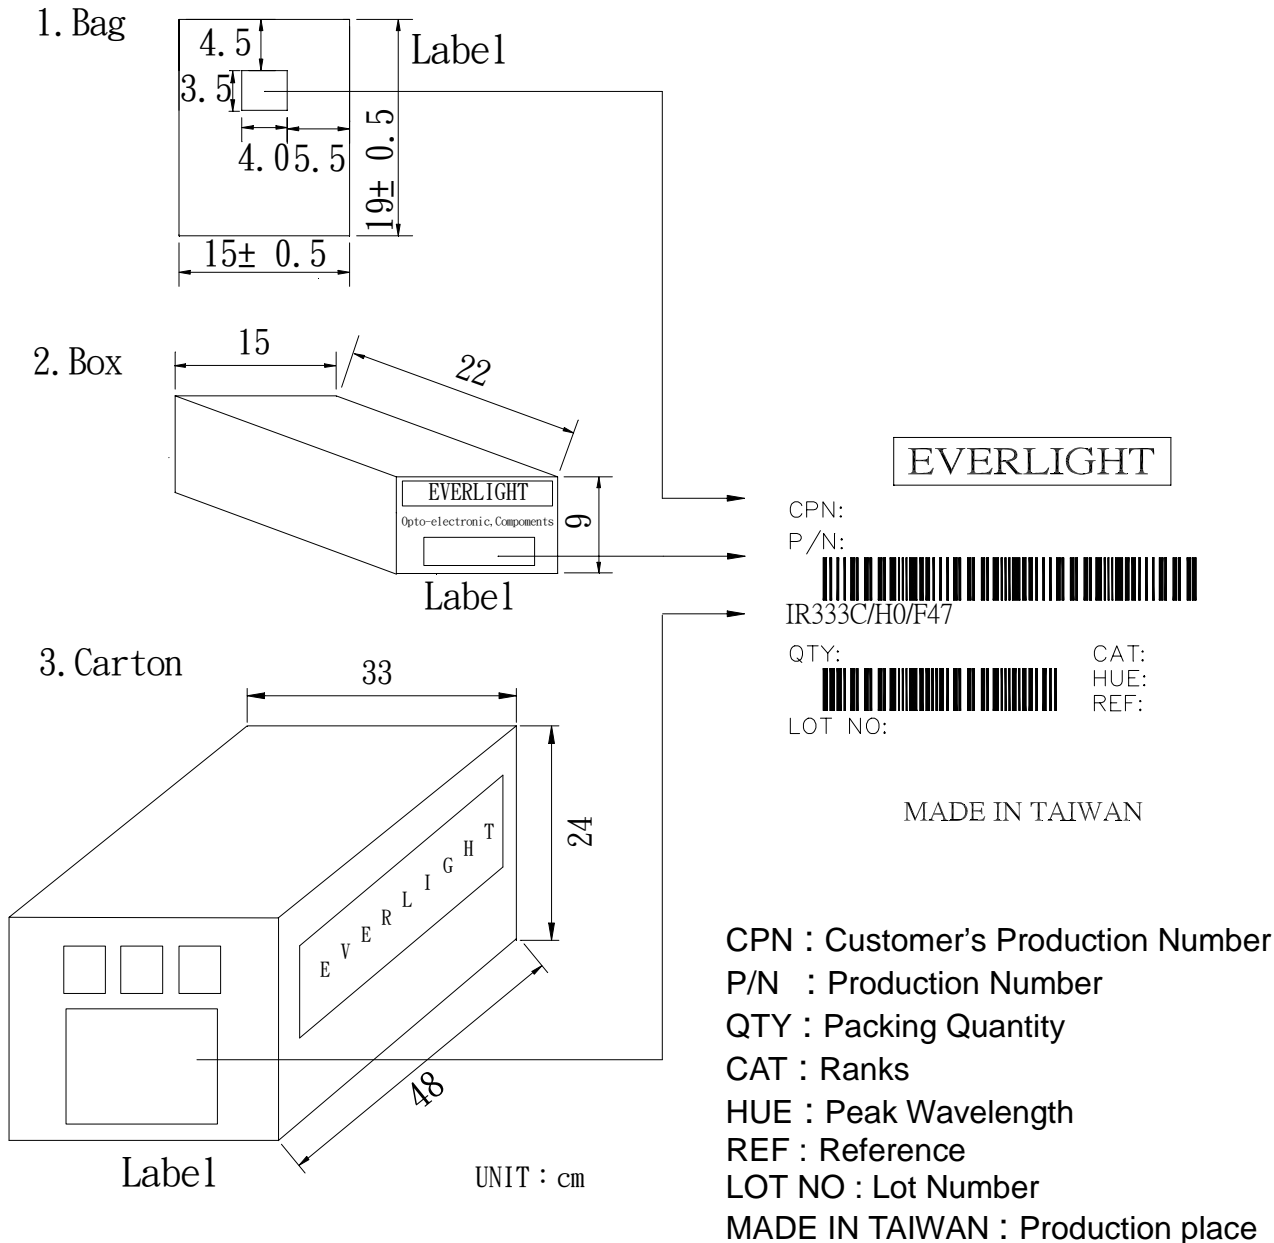

### ■ Packing Quantity Specification

1. 500 Pcs/1Bag , 6 Bags/1Box
2. 10 Boxes/1Carton