


12 Amp Subminiature PCB Power Relay

PC834



FEATURES

- 12 Amp continuous contact capacity
- 1 Form A contact form
- Smallest 12 Amp relay
- Class "B" insulation standard
- Class "F" insulation available
- 2.5 Kv dielectric between coil and contacts
- Sealed, immersion cleanable



File # E86876

UL/CSA RATINGS

Load Type	All Forms All Contacts
General Use	12 Amps @ 125 VAC, 10 Amps @ 277 VAC @ 30 VDC
Resistive	12 Amps @ 125 VAC, 10 Amps @ 277 VAC @ 30 VDC
TV	5 Amps @ 125 VAC

CONTACT DATA

Material		AgCdO (Silver Cadmium Oxide) AgSnO (Silver Tin Oxide)
Initial Contact Resistance		100 milliohms max @ 0.1A, 6VDC
Service Life	Mechanical	1 X 10 ⁷ Operations
	Electrical	1 X 10 ⁵ Operations

CHARACTERISTICS

Operate Time	10 ms. Max.
Release Time	4 ms. Max.
Insulation Resistance	100 megohms min, at 500VDC, 50%RH
Dielectric Strength	2500 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts
Shock Resistance	10 g, 11ms, functional; 100 g, destructive
Vibration Resistance	DA 1.5 mm, 10 - 55 Hz
Power Consumption	.45W
Ambient Temperature Range	-40 to 70 C operating for class B, -40 to 130 C storage
Weight	7 grams approx.

ORDERING INFORMATION

Example:	PC834	-1A	-12	S	F
Model					
Contact Form					
1A					
Coil Voltage					
Enclosure					
S: Sealed; C: Flux Free					
Insulation System					
Nil: Class B (125 degrees C), F: Class F (155 degrees C)					

COIL DATA


Coil Voltage	Resistance ohms $\pm 10\%$	Must Operate Voltage Max. (VDC)	Must Release Voltage Min. (VDC)	Continuous Voltage Max. (VDC)
3	20	2.25	0.15	3.3
5	56	3.75	0.25	5.5
6	80	4.5	0.30	6.6
9	180	6.75	0.45	9.9
12	320	9.0	0.60	13.2
18	720	13.5	0.90	19.8
24	1280	18.0	1.20	26.4

Note: Custom coil voltages within the ranges shown are available on special order.

**Dimensions in Inches (millimeters)
Drawings are 2X actual size**

Side View

End View

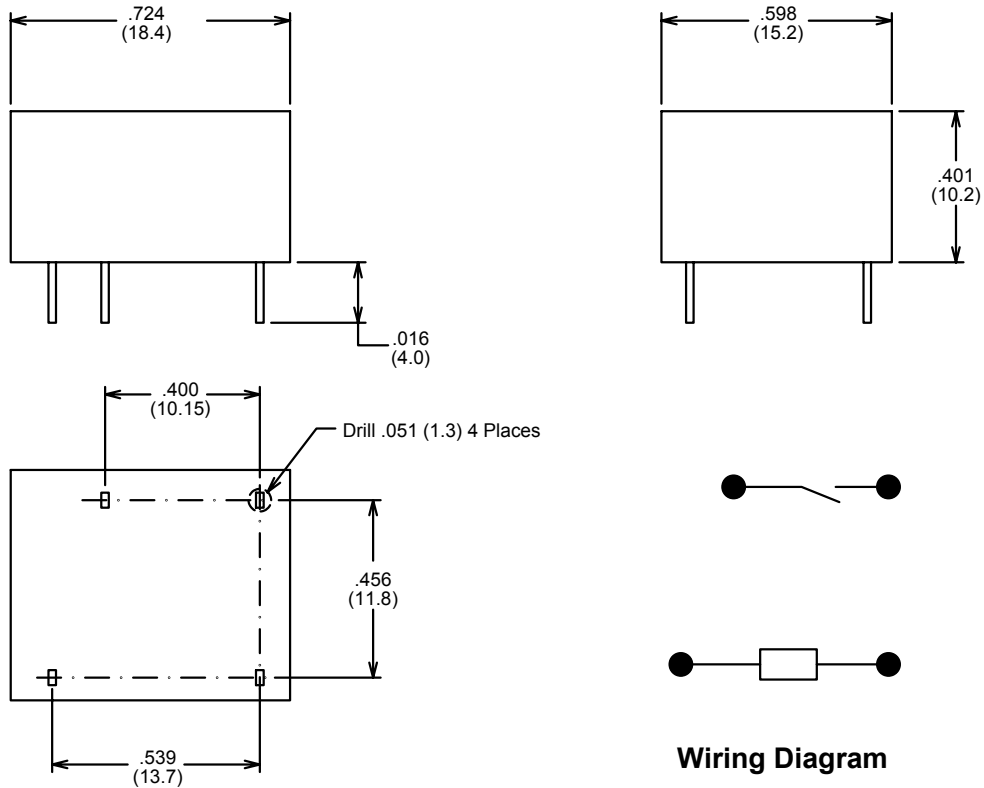

Notes:

Tolerances $\pm .010$ unless otherwise noted



3220 Commander Drive, Suite 102, Carrollton, Texas 75006

Sales: Call Toll Free (888) 997-3933 Fax (818) 342-5296 email: pickerwest@sbcglobal.net URL: pickercomponents.com