


Specifications


Parameter	Unit	Minimum	Typical	Maximum	
Center Frequency	MHz	69.9	70	70.1	
Insertion Loss	dB	-	24.3	27	
1 dB Bandwidth	MHz	-	14.42	-	
3 dB Bandwidth	MHz	14.5	14.62	-	
40 dB Bandwidth	MHz	-	15.37	-	
50 dB Bandwidth	MHz	-	15.44	-	
Passband Variation	dB	-	0.9	1.5	
Absolute Delay	usec	-	3.74	4	
Ultimate Rejection	$f_0 \pm 7.7\text{MHz}$	dB	35	60	-
	$f_0 \pm 7.9\text{MHz}$	dB	45	61	-
	$f_0 \pm 8.3\text{MHz}$	dB	50	59	-
	$f_0 \pm 12.3\text{MHz}$	dB	55	57	-
	$f_0 \pm 15\text{MHz}$	dB	55	62	-
Material Temperature coefficient	KHz/°C	-6.58			
Ambient Temperature	°C	25			
Package Size	DIP3512 (35.2x12.7x5.2mm3)				

Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

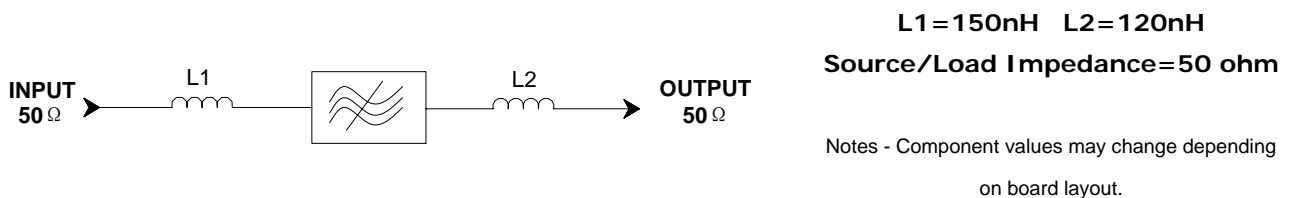

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN70A31	
		Rev. Date	2006-8-30	
		Rev.	1.0	Page

Package Dimension

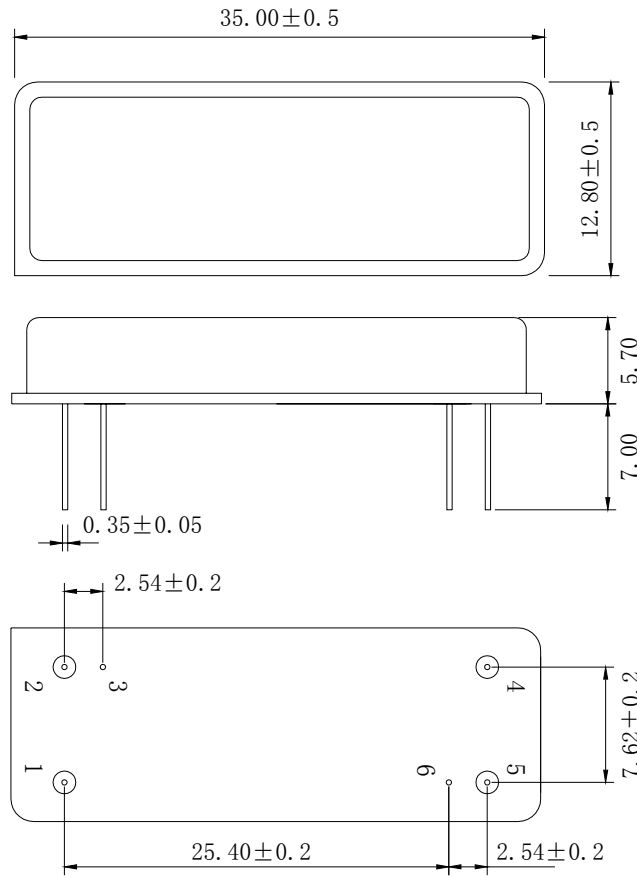

Package: DIP3512

Unit: mm

Input	1
Output	5
Ground	2,3,4,6

Package: DIP3512

Unit: mm




SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060


Part Number	LBN70A31	
Rev. Date	2006-8-30	
Rev.	1.0	Page 2/3

Typical Performance


Frequency Respond

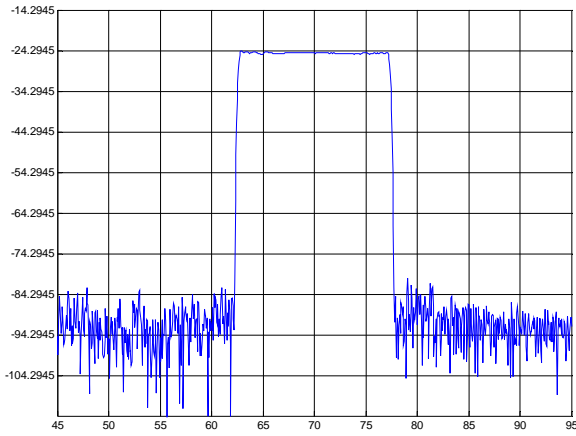


Passband Respond

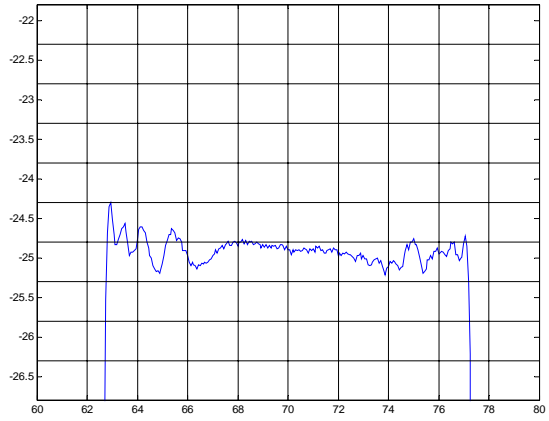


Group Delay Variation($f_0 \pm 7\text{MHz}$)

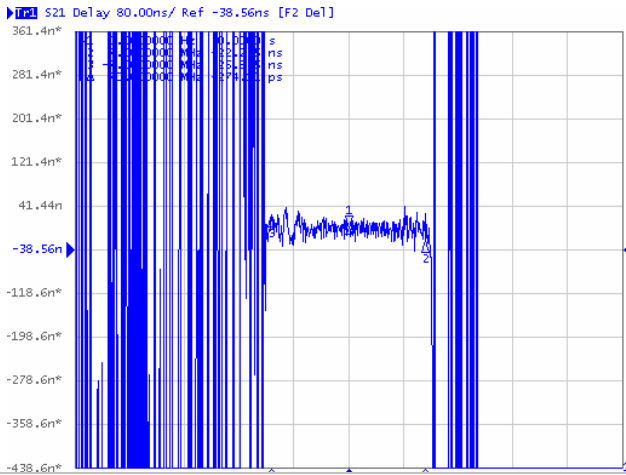


Phase Linearity($f_0 \pm 7\text{MHz}$)

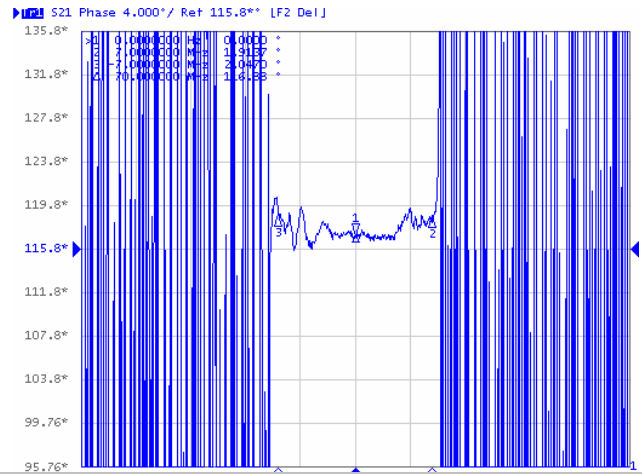

Smith Chart S11

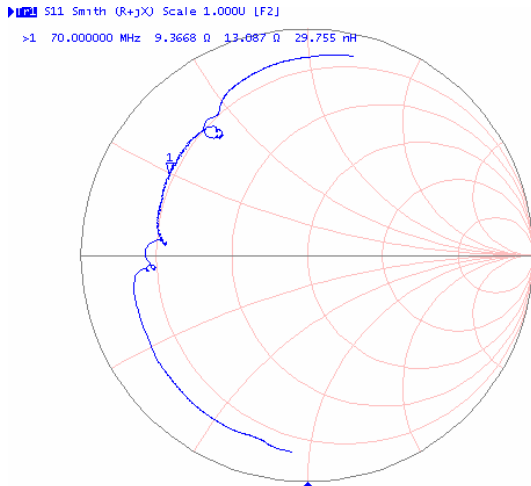

Smith Chart S22

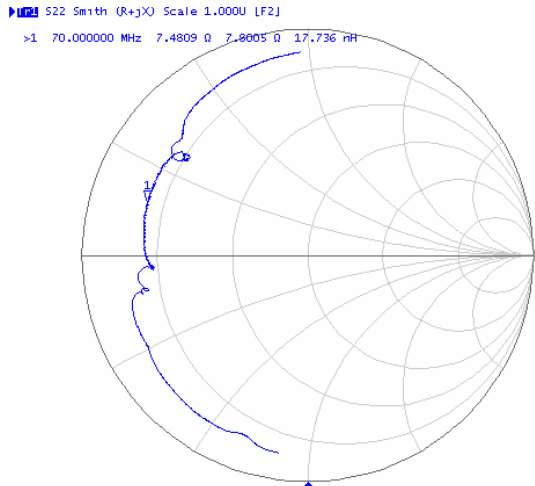

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBN70A31	
Rev. Date	2006-8-30	
Rev.	1.0	Page 3/3