



U74AHC1G08

CMOS IC


2-INPUT AND GATE

DESCRIPTION

The U74AHC1G08 is a high-speed Si-gate CMOS device which provides the 2-input AND function.

FEATURES

- * Operation Voltage Range: 2~5.5V
- * Low Power Dissipation: $I_{CC}=10\mu A(\text{Max})$
- * High Speed: $t_{pd}=4.3ns(\text{Typ})$ at $V_{CC} = 5V$

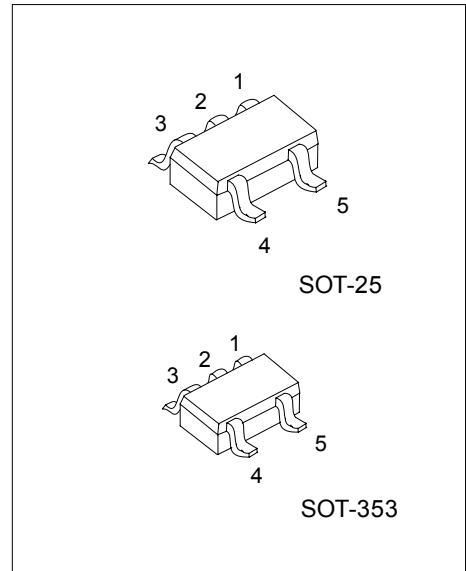


*Pb-free plating product number:
U74AHC1G08L

ORDERING INFORMATION


Order Number		Package	Packing
Normal	Lead Free Plating		
U74AHC1G08-AF5-R	U74AHC1G08L-AF5-R	SOT-25	Tape Reel
U74AHC1G08-AL5-R	U74AHC1G08L-AL5-R	SOT-325	Tape Reel

<p>U74AHC1G08L-AF5-R</p> <p>(1) Packing Type (2) Package Type (3) Lead Plating</p>	<p>(1) R: Tape Reel (2) AF5: SOT-25, AL5: SOT-353 (3) L: Lead Free Plating, Blank: Pb/Sn</p>
--	--

MARKING

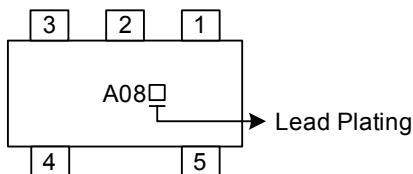



■ PIN CONFIGURATION



■ FUNCTION TABLE (each gate)

INPUTS		OUTPUT
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

■ LOGIC DIAGRAM AND IEC LOGIC SYMBOL



■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5~7	V
Input Voltage	V_{IN}	-0.5~7	V
Output Voltage	V_{OUT}	-0.5~ $V_{CC}+0.5$	V
Input Clamp Current	I_{IK}	-20	mA
Output Clamp Current	I_{OK}	± 20	mA
Output Current	I_{OUT}	± 25	mA
V_{CC} or GND Current	I_{CC}	± 50	mA
Storage Temperature	T_{STG}	-65 ~ +150	

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2		5.5	V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}		0		V_{CC}	V
High-Level Output Current	I_{OH}	$V_{CC}=2V$			-50	μA
		$V_{CC}=3.3\pm 0.3V$			-4	mA
		$V_{CC}=3.3\pm 0.3V$			-8	mA
Low-Level Output Current	I_{OL}	$V_{CC}=2V$			50	μA
		$V_{CC}=3.3\pm 0.3V$			4	mA
		$V_{CC}=5\pm 0.5V$			8	mA
Input Rise and Fall Times	dt/dv	$V_{CC}=3.3+0.3V$			100	ns/V
		$V_{CC}=5.0+0.5V$			20	
Operating Temperature	T_{amb}		-40		85	

■ STATIC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	$V_{CC}(V)$	$T_A=25$			-40~85		UNIT
				MIN	TYP	MAX	MIN	MAX	
High-Level Input Voltage	V_{IH}		2.0	1.5			1.5		V
			3.0	2.1			2.1		
			5.5	3.85			3.85		
Low-Level Input Voltage	V_{IL}		2.0			0.5		0.5	V
			3.0			0.9		0.9	
			5.5			1.65		1.65	
High-Level Output Voltage	V_{OH}	$I_{OH}=-50 \mu A$	2.0	1.9	2.0		1.9		V
			3.0	2.9	3.0		2.9		
		$I_{OH}=-4mA$	4.5	4.4	4.5		4.4		
			3.0	2.58			2.48		
Low-Level Output Voltage	V_{OL}	$I_{OL}=50 \mu A$	2.0			0.1		0.1	V
			3.0			0.1		0.1	
			4.5			0.1		0.1	
		$I_{OL}=4mA$	3.0			0.36		0.44	
			4.5			0.36		0.44	
Input Leakage Current		$V_{IN}=V_{CC}$ or GND	0~5.5			± 0.1		± 1	μA
Quiescent Supply Current		$V_{IN}=V_{CC}$ or GND $I_{OUT}=0$	5.5			1		10	μA
Input Capacitance		$V_{IN}=V_{CC}$ or GND	5		4	10		10	pF


■ DYNAMIC CHARACTERISTICS (Input: $t_R, t_F \leq 3\text{ns}$; $\text{PRR} \leq 1\text{MHz}$)

PARAMETER	SYMBOL	$V_{CC}(V)$	C_L (pF)	$T_A=25$			-40~85		UNIT
				MIN	TYP	MAX	MIN	MAX	
Propagation delay time Input (A or B) to output(Y)	t_{PLH}	3.3 ± 0.3	15		6.2	8.8	1	10.5	ns
	t_{PHL}				6.2	8.8	1	10.5	
	t_{PLH}		50		8.7	12.3	1	14	
	t_{PHL}				8.7	12.3	1	14	
Propagation delay time Input (A or B) to output(Y)	t_{PLH}	5 ± 0.5	15		4.3	5.9	1	7	ns
	t_{PHL}				4.3	5.9	1	7	
	t_{PLH}		50		5.8	7.9	1	9	
	t_{PHL}				5.8	7.9	1	9	


■ OPERATING CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	TYP	UNIT
Power Dissipation Capacitance	Cpd	No load, $f=1\text{MHz}$, $V_{CC}=5$	18	pF

■ TEST CIRCUIT AND WAVEFORMS

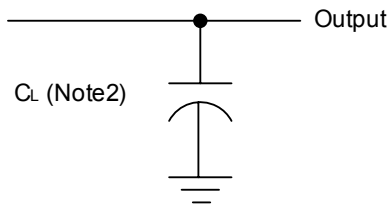

Note: C_L includes probe and jig capacitance.

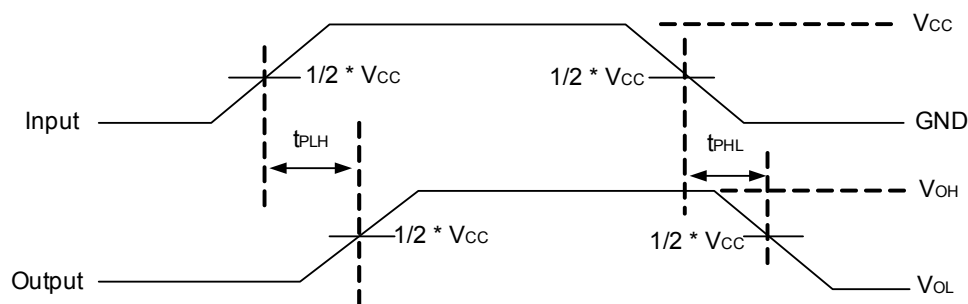

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.