

Major Ratings and Characteristics


Characteristics	22CGQ045	Units
$I_{F(AV)}$ Rectangular waveform	35*	A
V_{RRM}	45	V
I_{FSM} @ $t_p = 8.3ms$ sine	300	A
V_F @ 20Apk, $T_J = 125^\circ C$ (Per Leg)	0.70	V
T_J, T_{stg} Operating and storage	-55 to 150	$^\circ C$

* $I_{F(AV)}$ current limited by pin diameter

Description/Features

The 22CGQ045 center tap Schottky rectifier has been expressly designed to meet the rigorous requirements of hi-rel environments. It is packaged in the hermetic, isolated, TO-254AA package and has extremely low reverse leakage at high temperature. Full MIL-PRF-19500 quality conformance testing is available on source controlled drawings to JANTX, JANTXV, or JANS levels. Typical applications include switching power supplies and resonant power converters.

- Hermetically sealed
- Center tap
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Electrically isolated
- Ceramic eyelets

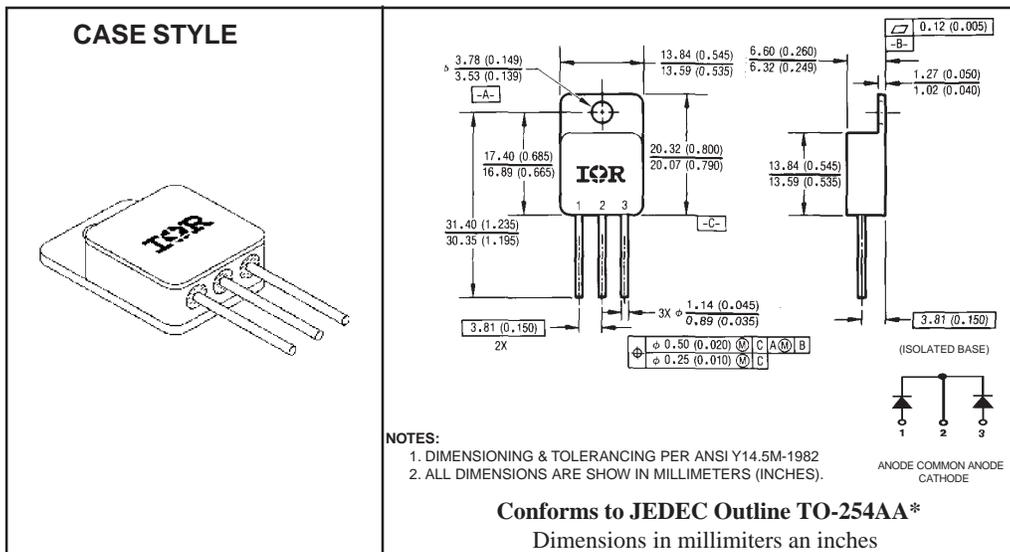

Voltage Ratings

Part number	22CGQ045
V_R Max. DC Reverse Voltage (V) (Per Leg)	45
V_{RWM} Max. Working Peak Reverse Voltage (V) (Per Leg)	

Absolute Maximum Ratings

Parameters	22CGQ045	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current *See Fig. 4	35*	A	50% duty cycle @ $T_C = 100^\circ\text{C}$, rectangular waveform * $I_{F(AV)}$ current limited by pin diameter
I_{FSM} Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg)	300	A	@ $t_p = 8.3$ ms sine

Electrical Specifications

Parameters	22CGQ045	Units	Conditions
V_{FM} Max. Forward Voltage Drop (Per Leg) *See Fig. 1 ①	0.75	V	@ 20A $T_J = 25^\circ\text{C}$
	0.97	V	@ 35A
	0.70	V	@ 20A $T_J = 125^\circ\text{C}$
	0.91	V	@ 35A
I_{RM} Max. Reverse Leakage Current (Per Leg) *See Fig. 2 ①	0.5	mA	$T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_R$
	20	mA	$T_J = 125^\circ\text{C}$
C_T Max. Junction Capacitance (Per Leg)	1400	pF	$V_R = 5V_{DC}$, (test signal range 100KHz to 1MHz) 25°C
L_S Typical Series Inductance (Per Leg)	8.7	nH	Measured lead to lead 5mm from package body

Thermal-Mechanical Specifications

Parameters	22CGQ045	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance, Junction to Case (Per Leg)	1.25	$^\circ\text{C}/\text{W}$	DC operation *See Fig. 5
R_{thJC} Max. Thermal Resistance, Junction to Case (Per Package)	0.625	$^\circ\text{C}/\text{W}$	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.21	$^\circ\text{C}/\text{W}$	Mounting surface, smooth and greased
wt Weight (Typical)	9.3	g	
Die Description (Square)	0.150	inches	
Case Style	TO-254AA	JEDEC	

① Pulse Width < 300 μs , Duty Cycle < 2%

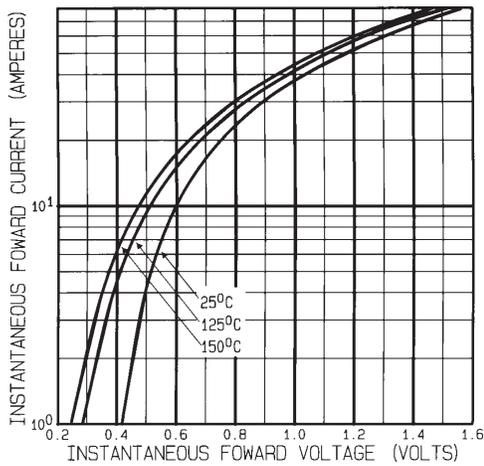


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

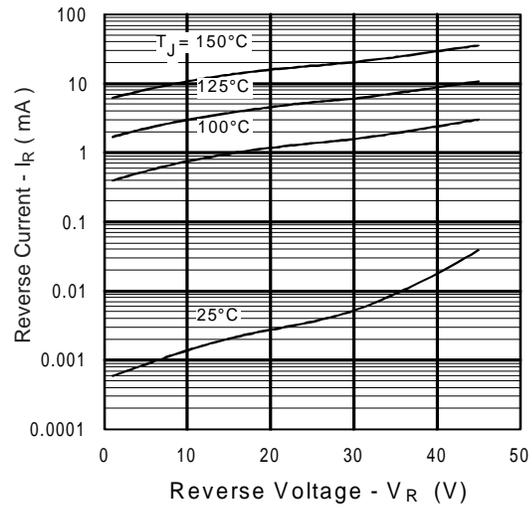


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

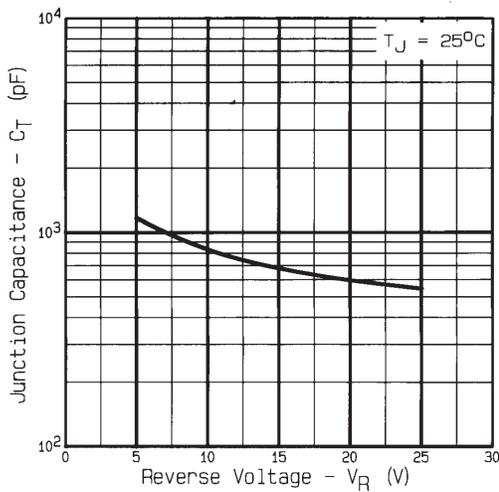


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

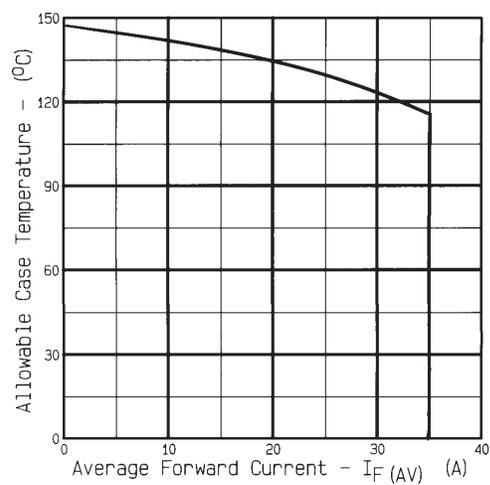


Fig. 4 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

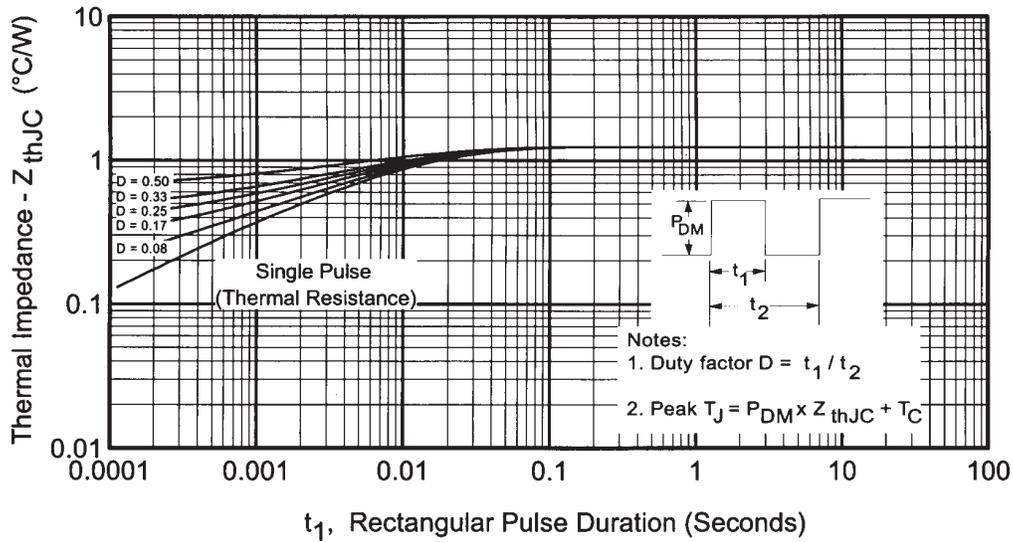


Fig.5 - Max. Thermal Impedance Z_{thJC} characteristics (Per Leg)