

REPETITIVE AVALANCHE AND dv/dt RATED HEXFET® TRANSISTOR

IRHNA9160

P-CHANNEL RAD HARD

-100Volt, 0.087Ω, RAD HARD HEXFET

International Rectifier's P-Channel RAD HARD technology HEXFETs demonstrate excellent threshold voltage stability and breakdown voltage stability at total radiation doses as high as 10^5 rads (Si). Under **identical** pre- and post-radiation test conditions, International Rectifier's P-Channel RAD HARD HEXFETs retain **identical** electrical specifications up to 1×10^5 Rads (Si) total dose. No compensation in gate drive circuitry is required. These devices are also capable of surviving transient ionization pulses as high as 1×10^{12} Rads (Si)/Sec, and return to normal operation within a few microseconds. Single Event Effect (SEE) testing of International Rectifier's P-Channel RAD HARD HEXFETs has demonstrated virtual immunity to SEE failure. Since the RAD HARD process utilizes International Rectifier's patented HEXFET technology, the user can expect the highest quality and reliability in the industry.

P-Channel RAD HARD HEXFET transistors also feature all of the well-established advantages of MOSFETs, such as voltage control, very fast switching, ease of paralleling and temperature stability of the electrical parameters. They are well-suited for applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers and high-energy pulse circuits in space and weapons environments.

Product Summary

Part Number	BV _{DSS}	R _{DS(on)}	I _D
IRHNA9160	-100V	0.087Ω	-38A

Features:

- Radiation Hardened up to 1×10^5 Rads (Si)
- Single Event Burnout (SEB) Hardened
- Single Event Gate Rupture (SEGR) Hardened
- Gamma Dot (Flash X-Ray) Hardened
- Neutron Tolerant
- Identical Pre- and Post-Electrical Test Conditions
- Repetitive Avalanche Rating
- Dynamic dv/dt Rating
- Simple Drive Requirements
- Ease of Paralleling
- Hermetically Sealed
- Surface Mount
- Lightweight

Absolute Maximum Ratings


Pre-Radiation

	Parameter	IRHNA9160	Units
I _D @ V _{GS} = -12V, T _C = 25°C	Continuous Drain Current	-38	A
I _D @ V _{GS} = -12V, T _C = 100°C	Continuous Drain Current	-24	
I _{DM}	Pulsed Drain Current ①	-152	
P _D @ T _C = 25°C	Max. Power Dissipation	300	W
	Linear Derating Factor	2.4	W/K⑤
V _{GS}	Gate-to-Source Voltage	±20	V
EAS	Single Pulse Avalanche Energy ②	500	mJ
I _{AR}	Avalanche Current ①	-38	A
EAR	Repetitive Avalanche Energy ①	30	mJ
dv/dt	Peak Diode Recovery dv/dt ③	-5.5	V/ns
T _J	Operating Junction	-55 to 150	°C
T _{STG}	Storage Temperature Range		
	Package Mounting Surface Temperature	300 (for 5 sec.)	
	Weight	3.3 (typical)	g

Electrical Characteristics @ Tj = 25°C (Unless Otherwise Specified)

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
BV _{DSS}	Drain-to-Source Breakdown Voltage	-100	—	—	V	V _{GS} = 0V, I _D = -1.0 mA
ΔBV _{DSS} /ΔT _J	Temperature Coefficient of Breakdown Voltage	—	-0.13	—	V/°C	Reference to 25°C, I _D = -1.0 mA
RDS(on)	Static Drain-to-Source	—	—	0.087	Ω	V _{GS} = -12V, I _D = -24A V _{GS} = -12V, I _D = -38A ④
	On-State Resistance	—	—	0.010		
VGS(th)	Gate Threshold Voltage	-2.0	—	-4.0	V	V _{DS} = V _{GS} , I _D = -1.0 mA
gfs	Forward Transconductance	10	—	—	S (r)	V _{DS} > -15V, I _{DS} = -24A ④
IDSS	Zero Gate Voltage Drain Current	—	—	-25	μA	V _{DS} = 0.8 x Max Rating, V _{GS} = 0V V _{DS} = 0.8 x Max Rating V _{GS} = 0V, T _J = 125°C
		—	—	-250		
IGSS	Gate-to-Source Leakage Forward	—	—	-100	nA	V _{GS} = -20V
IGSS	Gate-to-Source Leakage Reverse	—	—	100	nA	V _{GS} = 20V
Qg	Total Gate Charge	—	—	200	nC	V _{GS} = -12V, I _D = -38A V _{DS} = Max. Rating x 0.5
Qgs	Gate-to-Source Charge	—	—	50		
Qgd	Gate-to-Drain (“Miller”) Charge	—	—	90		
td(on)	Turn-On Delay Time	—	—	70	ns	V _{DD} = -100V, I _D = -38A, R _G = 2.35Ω
tr	Rise Time	—	—	240		
td(off)	Turn-Off Delay Time	—	—	220		
tf	Fall Time	—	—	150		
LD	Internal Drain Inductance	—	8.7	—	nH	Measured from the drain lead, 6mm (0.25 in.) from package to center of die. Modified MOSFET symbol showing the internal inductances.
LS	Internal Source Inductance	—	8.7	—		
Ciss	Input Capacitance	—	7000	—	pF	V _{GS} = 0V, V _{DS} = -25V f = 1.0 MHz
Coss	Output Capacitance	—	2000	—		
Crss	Reverse Transfer Capacitance	—	500	—		

Source-Drain Diode Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
I _S	Continuous Source Current (Body Diode)	—	—	-38	A	Modified MOSFET symbol showing the integral reverse p-n junction rectifier. 
I _{SM}	Pulse Source Current (Body Diode) *	—	—	-152		
VSD	Diode Forward Voltage	—	—	-3.3	V	T _J = 25°C, I _S = -38A, V _{GS} = 0V ④
trr	Reverse Recovery Time	—	—	775	ns	T _J = 25°C, I _F = -38A, di/dt ≤ -100A/μs V _{DD} ≤ -50V ④
QRR	Reverse Recovery Charge	—	—	5.0	μC	
ton	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by LS + LD.				

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
R _{thJC}	Junction-to-Case	—	—	0.42	K/W ⑤	soldered to a copper-clad PC board
R _{thJ-PCB}	Junction-to-PC board	—	TBD	—		

Radiation Performance of P-Channel Rad Hard HEXFETs

International Rectifier Radiation Hardened HEXFETs are tested to verify their hardness capability. The hardness assurance program at International Rectifier uses two radiation environments.

Every manufacturing lot is tested in a low dose rate (total dose) environment per MIL-STD-750, test method 1019. International Rectifier has imposed a standard gate voltage of -12 volts per note 6 and a V_{DSS} bias condition equal to 80% of the device rated voltage per note 7. Pre- and post-radiation limits of the devices irradiated to 1×10^5 Rads (Si) are identical and are presented in Table 1. The values in Table 1 will be met for either of the two low dose rate test circuits that are used. Both pre- and post-radiation performance

are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison. It should be noted that at a radiation level of 1×10^5 Rads (Si), no change in limits are specified in DC parameters.

High dose rate testing may be done on a special request basis, using a dose rate up to 1×10^{12} Rads (Si)/Sec.

International Rectifier radiation hardened P-Channel HEXFETs are considered to be neutron-tolerant, as stated in MIL-PRF-19500 Group D. International Rectifier radiation hardened HEXFETs have been characterized in heavy ion Single Event Effects environment and the results are shown in Table 3.

Table 1. Low Dose Rate ⑥ ⑦

Parameter		IRHNA9160		Units	Test Conditions ⑩
		100K Rads (Si)			
		min.	max.		
BV_{DSS}	Drain-to-Source Breakdown Voltage	-100	—	V	$V_{GS} = 0V, I_D = -1.0 \text{ mA}$
$V_{GS(th)}$	Gate Threshold Voltage ④	-2.0	-4.0		$V_{GS} = V_{DS}, I_D = -1.0 \text{ mA}$
I_{GSS}	Gate-to-Source Leakage Forward	—	-100	nA	$V_{GS} = -20V$
I_{GSS}	Gate-to-Source Leakage Reverse	—	100		$V_{GS} = 20V$
I_{DSS}	Zero Gate Voltage Drain Current	—	-25	μA	$V_{DS} = 0.8 \times \text{Max Rating}, V_{GS} = 0V$
$R_{DS(on)1}$	Static Drain-to-Source ④ On-State Resistance One	—	0.087	Ω	$V_{GS} = -12V, I_D = -24A$
V_{SD}	Diode Forward Voltage ④	—	-3.3	V	$T_C = 25^\circ C, I_S = -38A, V_{GS} = 0V$

Table 2. High Dose Rate ⑧


Parameter	Description	10 ¹¹ Rads (Si)/sec			10 ¹² Rads (Si)/sec			Units	Test Conditions
		Min.	Typ	Max.	Min.	Typ.	Max.		
V_{DSS}	Drain-to-Source Voltage	—	—	-80	—	—	-80	V	Applied drain-to-source voltage during gamma-dot
I_{PP}	Peak radiation induced photo-current	—	-100	—	—	-100	—	A	Peak radiation induced photo-current
di/dt	Rate of rise of photo-current	—	-800	—	—	-160	—	A/ μ sec	Rate of rise of photo-current
L_1	Circuit inductance required to limit di/dt	0.1	—	—	0.5	—	—	μH	Circuit inductance required to limit di/dt

Table 3. Single Event Effects ⑨

Parameter	Typ.	Units	Ion	LET (Si) (MeV/mg/cm ²)	Fluence (ions/cm ²)	Range (μm)	V_{DS} Bias (V)	V_{GS} Bias (V)
BV_{DSS}	-100	V	Ni	28	1×10^5	~41	-100	5

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
Refer to current HEXFET reliability report.
- ② @ $V_{DD} = -25V$, Starting $T_J = 25^\circ C$,
 $E_{AS} = [0.5 * L * (I_L^2) * [BV_{DSS}/(BV_{DSS}-V_{DD})]$
Peak $I_L = -38A$, $V_{GS} = -12V$, $25 \leq R_G \leq 200\Omega$
- ③ $I_{SD} \leq -38A$, $di/dt \leq -170 A/\mu s$,
 $V_{DD} \leq BV_{DSS}$, $T_J \leq 150^\circ C$
Suggested $R_G = 2.35\Omega$
- ④ Pulse width $\leq 300 \mu s$; Duty Cycle $\leq 2\%$
- ⑤ $K/W = ^\circ C/W$
 $W/K = W/^\circ C$
- ⑥ **Total Dose Irradiation with VGS Bias.**
-12 volt V_{GS} applied and $V_{DS} = 0$ during irradiation per MIL-STD-750, method 1019.
- ⑦ **Total Dose Irradiation with VDS Bias.**
 $V_{DS} = 0.8$ rated BV_{DSS} (pre-radiation) applied and $V_{GS} = 0$ during irradiation per MIL-STD-750, method 1019.
- ⑧ This test is performed using a flash x-ray source operated in the e-beam mode (energy ~2.5 MeV), 30 nsec pulse.
- ⑨ Process characterized by independent laboratory.
- ⑩ All Pre-Radiation and Post-Radiation test conditions are **identical** to facilitate direct comparison for circuit applications.

Case Outline and Dimensions — SMD-2

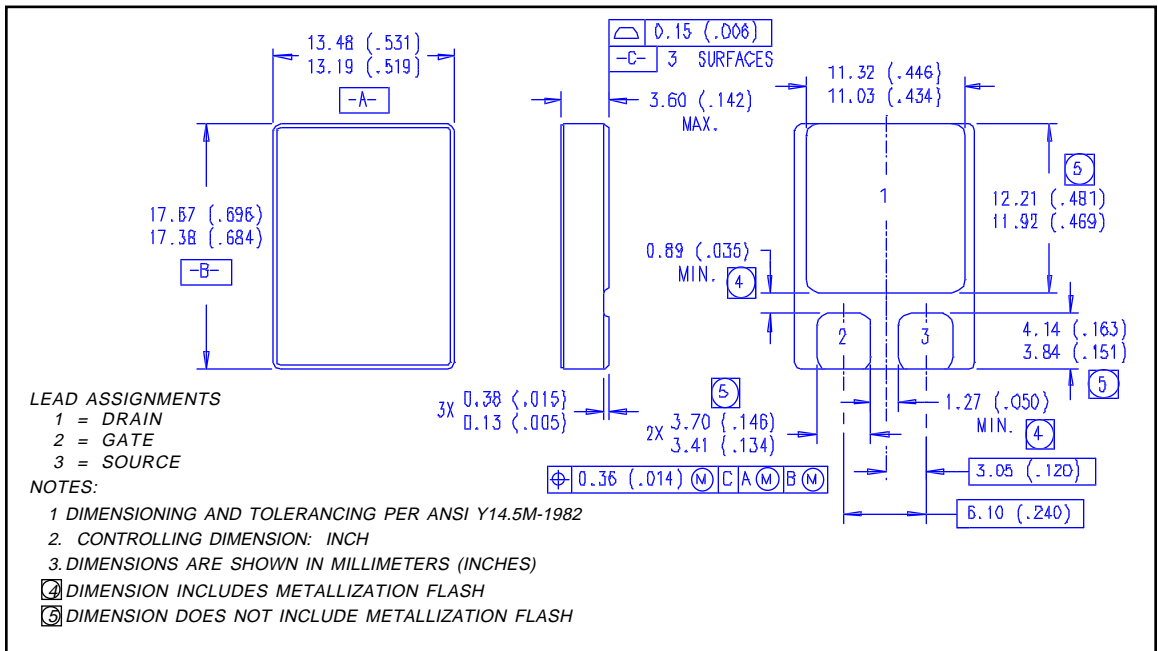

International
IR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 732020
IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111
IR FAR EAST: K&H Bldg., 2F, 3-30-4 Nishi-Ikeburo 3-Chome, Toshima-Ki, Tokyo Japan 171 Tel: 81 3 3983 0086
IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: 65 221 8371
<http://www.irf.com/> Data and specifications subject to change without notice. 5/96