




# 1.0 Amp Glass Passivated Sintered Fast Switching Rectifiers


**RGFZ10A . . . 10M Series**

## Description

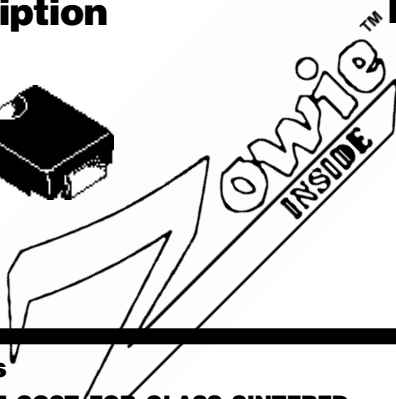

## Mechanical Dimensions

Package  
"SMA"

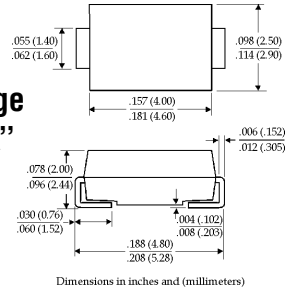







## Features

- **LOWEST COST FOR GLASS SINTERED FAST SWITCHING CONSTRUCTION**
- **LOWEST  $V_F$  FOR GLASS SINTERED FAST SWITCHING CONSTRUCTION**
- **TYPICAL  $I_R < 100$  nAmps**
- **1.0 AMP OPERATION @  $T_A = 55^\circ\text{C}$ , WITH NO THERMAL RUNAWAY**
- **SINTERED GLASS CAVITY-FREE JUNCTION**

Electrical Characteristics @ 25°C.	RGFZ10A . . . 10M Series							Units
Maximum Ratings	10A	10B	10D	10G	10J	10K	10M	
Peak Repetitive Reverse Voltage... $V_{RRM}$	50	100	200	400	600	800	1000	Volts
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	420	560	700	Volts
DC Blocking Voltage... $V_{DC}$	50	100	200	400	600	800	1000	Volts
Average Forward Rectified Current... $I_{F(av)}$ @ $T_A = 55^\circ\text{C}$ (Note 2)	1.0							Amps
Non-Repetitive Peak Forward Surge Current... $I_{FSM}$ ½ Sine Wave Superimposed on Rated Load	30							Amps
Forward Voltage @ 1.0A... $V_F$	1.3							Volts
Full Load Reverse Current... $I_{R(av)}$ Full Cycle Average @ $T_A = 55^\circ\text{C}$	100							µAmps
DC Reverse Current... $I_{R(max)}$ @ Rated DC Blocking Voltage	5.0							µAmps
$T_A = 25^\circ\text{C}$								
$T_A = 150^\circ\text{C}$	200							µAmps
Typical Thermal Resistance... $R_{\theta JA}$ (Note 2)	45							°C/W
Maximum Reverse Recovery Time... $t_{RR}$ (Note 3)	< 150 > 250 < 500 >							nS
Operating & Storage Temperature Range... $T_J, T_{STRG}$	-65 to 175							°C

# 1.0 Amp Glass Passivated Sintered Fast Switching Rectifiers

**RGFZ10A . . . 10M Series**

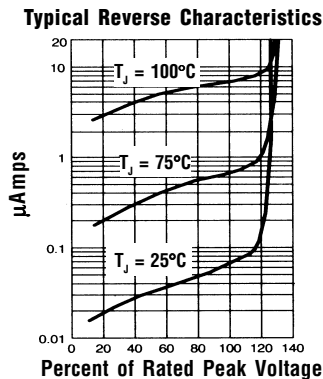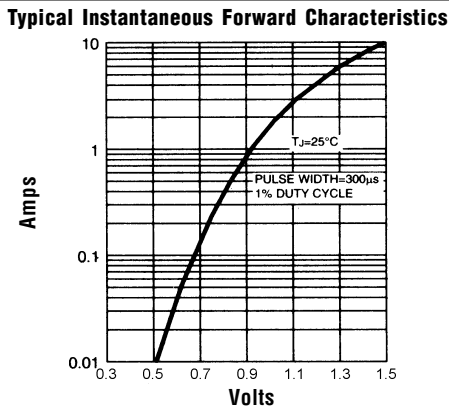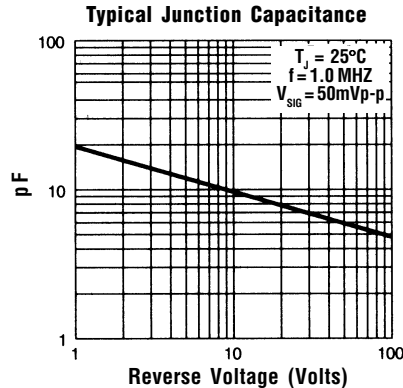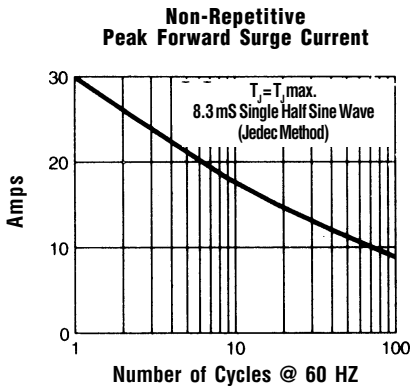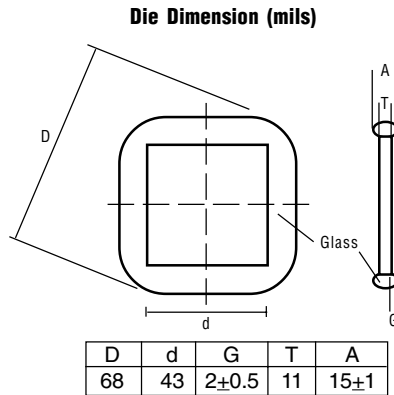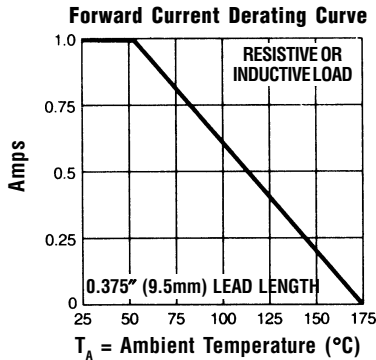

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.

- NOTES:**
1. Measured @ 1 MHz and applied reverse voltage of 4.0V.
  2. 5.0mm<sup>2</sup> (.013mm thick) land areas.
  3. Reverse Recovery Condition  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$ .