



SR8A20-G Thru SR8A100-G

Reverse Voltage: 20 ~ 100 Volts


Current: 8.0 Amp

Features:

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data:

- Case: TO-220AC molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Terminals: Solderable per MIL-STD-202, method 208
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 2.03 grams

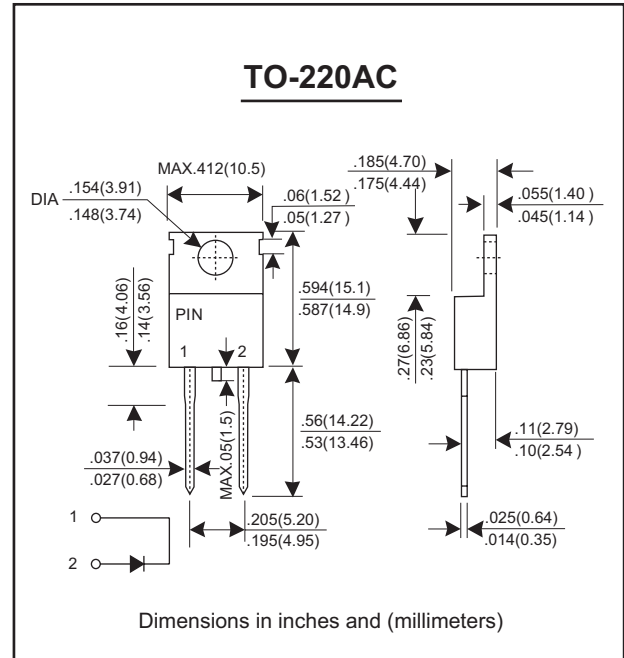

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

Parameter	Symbol	SR8A20-G	SR8A40-G	SR8A60-G	SR8A80-G	SR8A100-G	Unit
Max. Recurrent Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	V
Max. RMS Voltage	V_{RMS}	14	28	42	56	70	V
Max. DC Blocking Voltage	V_{DC}	20	40	60	80	100	V
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}	150					A
Max. Average Forward Rectified Current $T_c=100^{\circ}C$	$I_{(AV)}$	8.0					A
Instantaneous Forward Voltage at 1.0A	V_F	0.55	0.65	0.75	0.85	V	
Max. DC Reverse Current @ $T_j = 25^{\circ}C$	I_R	1.0					mA
At Rated DC Blocking Voltage @ $T_j = 100^{\circ}C$		50					
Typical junction Capacitance (Note1)	C_J	450					pF
Max. Operating Junction Temperature	T_j	-55 to +125					$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150					$^{\circ}C$

Note1: (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.



RATINGS AND CHARACTERISTIC CURVES SR8A20-G THRU SR8A100-G

FIG.1 - FORWARD CURRENT DERATING CURVE

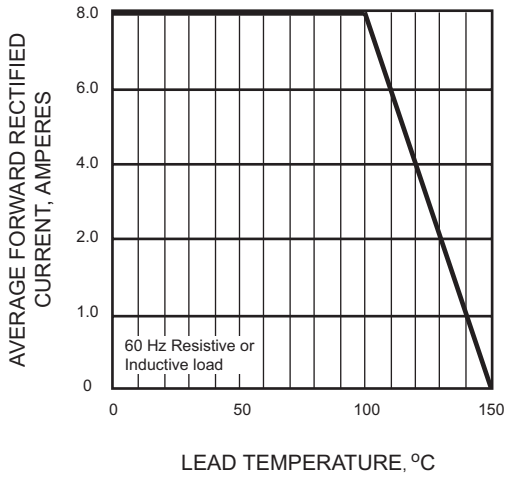


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

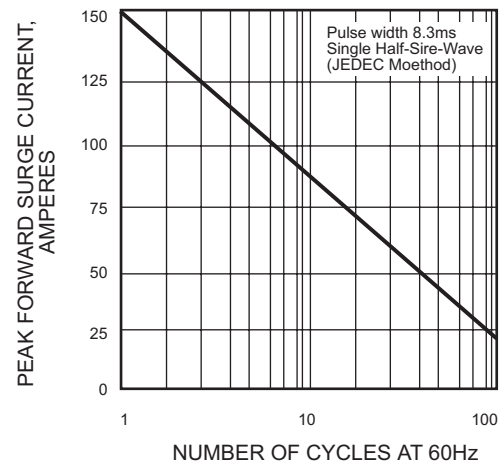


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

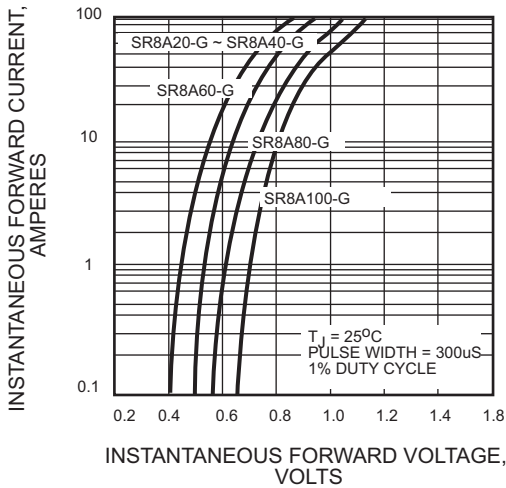


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

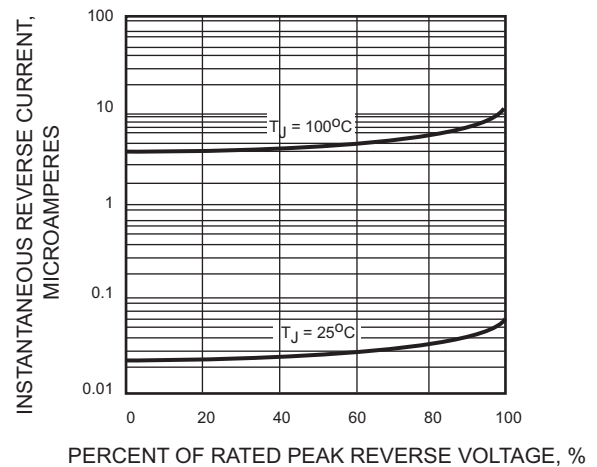


FIG.5 - TYPICAL JUNCTION CAPACITANCE

