




**PHASE NOISE (1 Hz BW, typical)**

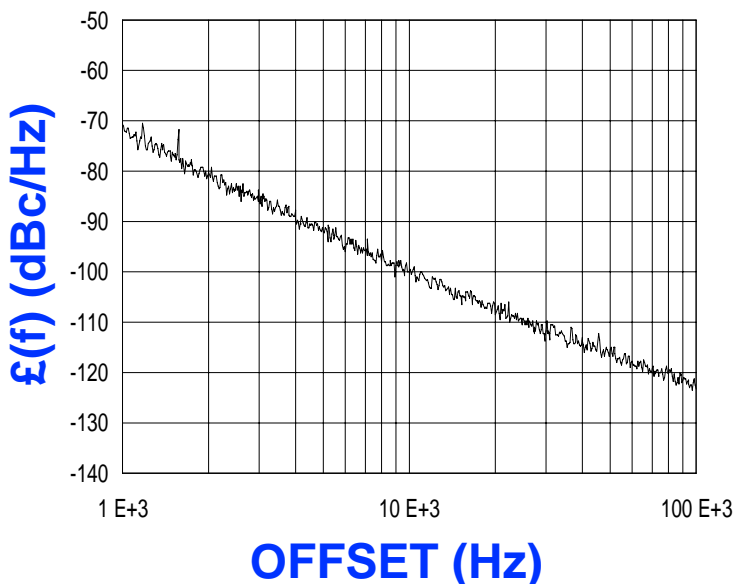

**FEATURES**

- Frequency Range: 1860 - 2160 MHz
- Tuning Voltage: 2-8 Vdc
- MINI-14S - Style Package

**APPLICATIONS**

- Portable radios
- PCS
- 

**PERFORMANCE SPECIFICATIONS**

	VALUE	UNITS
Oscillation Frequency Range	1860 - 2160	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-100	dBc/Hz
Harmonic Suppression (2nd, typ.)	-11	dBc
Tuning Voltage	2-8	Vdc
Tuning Sensitivity (avg.)	60	MHz/V
Power Output	7.75±3.25	dBm
Load Impedance	50	$\Omega$
Input Capacitance (max.)	50	pF
Pushing	<1	MHz/V
Pulling ( 14dB Return Loss, Any Phase)	<4	MHz
Operating Temperature Range	-40 to 85	$^{\circ}\text{C}$
Package Style	MINI-14S	

**POWER SUPPLY REQUIREMENTS**

Supply Voltage (Vcc, nom.)	9	Vdc
Supply Current (Icc, typ.)	22	mA


All specifications are typical unless otherwise noted and subject to change without notice.

**APPLICATION NOTES**


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

**NOTES:**

TUNING CURVE, typ.

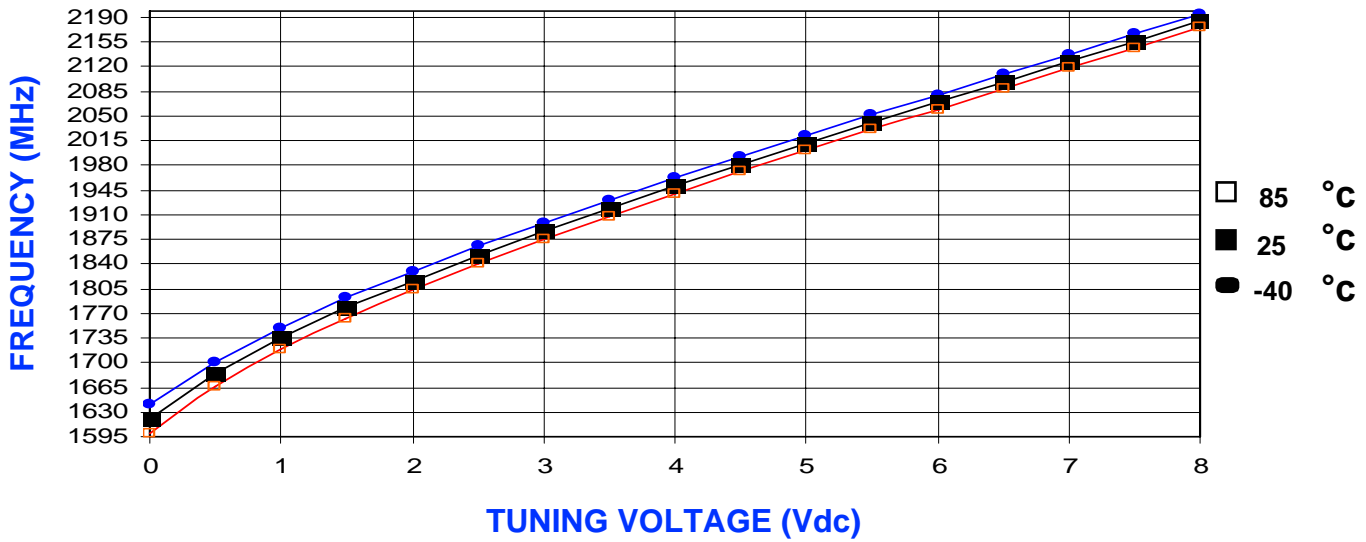

POWER CURVE, typ.

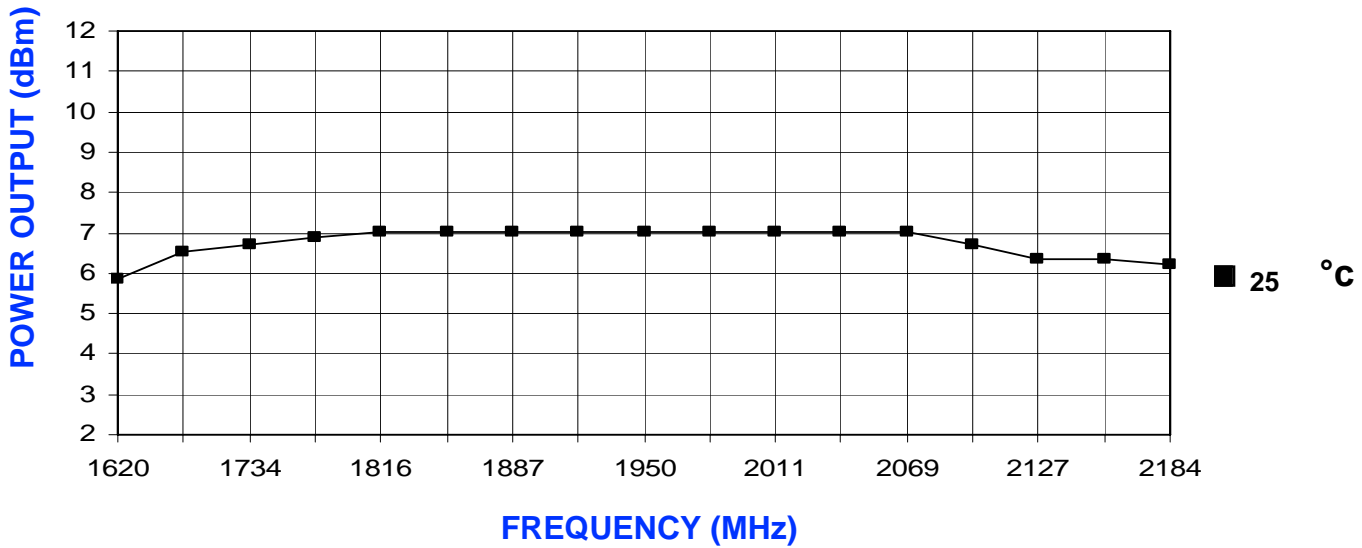

PHYSICAL DIMENSIONS

