


PHASE NOISE (1 Hz BW, typical)

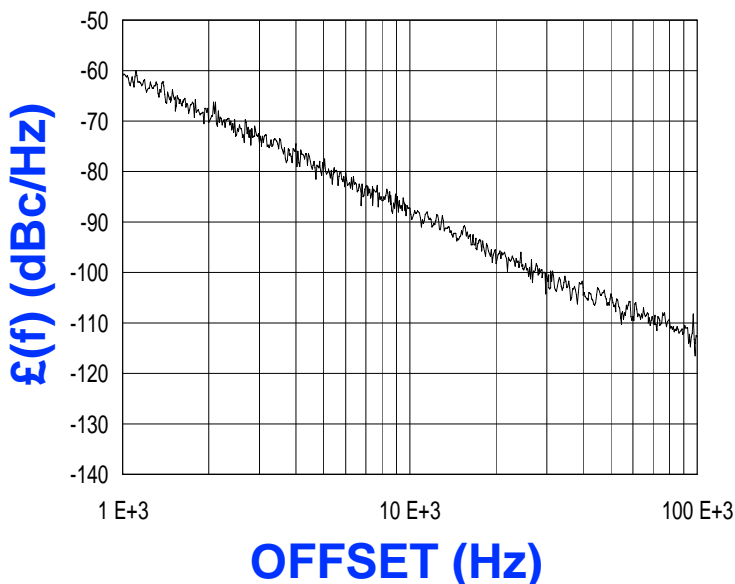

FEATURES

- Frequency Range: 3400 - 3600 MHz
- Tuning Voltage: 1-5 Vdc
- MINI-14S-L - Style Package

APPLICATIONS

- Direct Broadcast
- Satellite Up/Down Conversion
- Microwave Links

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	3400 - 3600	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-88	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Tuning Voltage	1-5	Vdc
Tuning Sensitivity (avg.)	94	MHz/V
Power Output	3±2	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<1	MHz/V
Pulling (14dB Return Loss, Any Phase)	<6	MHz
Operating Temperature Range	-40 to 85	°C
Package Style	MINI-14S-L	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	18	mA

All specifications are typical unless otherwise noted and subject to change without notice.


APPLICATION NOTES

- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs


NOTES:

Test Conditions: $V_{tune} = 1 \text{ Vdc} \dots F_{out} < 3370 \text{ MHz @ } 25^\circ\text{C}$
 $V_{tune} = 5 \text{ Vdc} \dots F_{out} > 3623 \text{ MHz @ } 25^\circ\text{C}$

TUNING CURVE, typ.

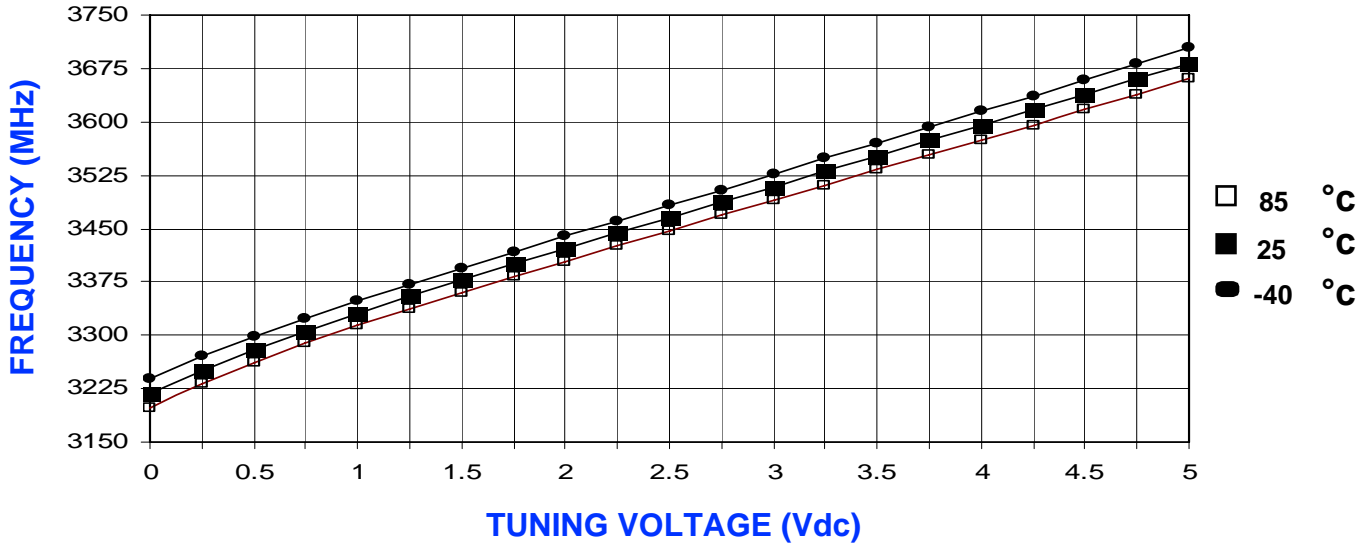

POWER CURVE, typ.

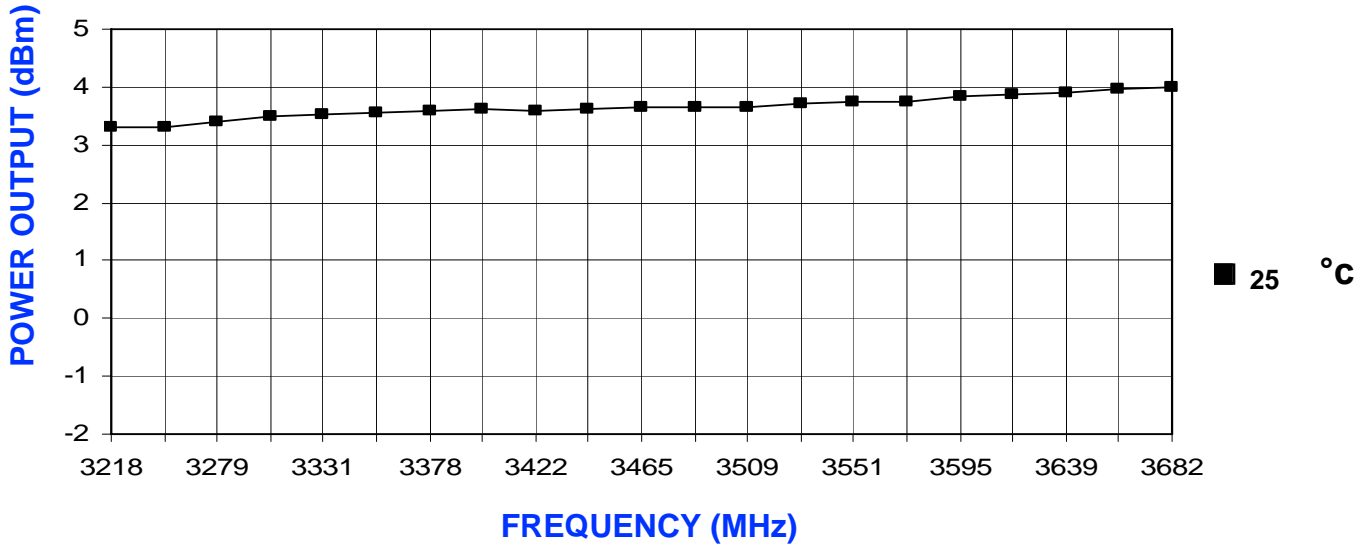

PHYSICAL DIMENSIONS

