



DATA SHEET

KBU8A~KBU8K

SILICON SINGLE-PHASE BRIDGE RECTIFIER

VOLTAGE 50 to 800 Volts **CURRENT** 8.0 Amperes

KBU Unit: inch (mm)


Recognized File # E111753

FEATURES

- Plastic material has Underwriters Laboratory Flammability Classification 94V-O
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High temperature soldering guaranteed:
260°C/10 seconds/.375"(9.5mm) lead length at 5 lbs. (2.3kg) tension
- Both normal and Pb free product are available :
Normal : 80~95% Sn, 5~20% Pb
Pb free: 98.5% Sn above

MECHANICAL DATA

Case: Reliable low cost construction utilizing molded plastic technique
 Terminals: Leads solderable per MIL-STD-202, Method 208
 Mounting position: Any
 Mounting torque: 5 in. lb. Max.
 Weight: 0.3 ounce, 8.0 grams

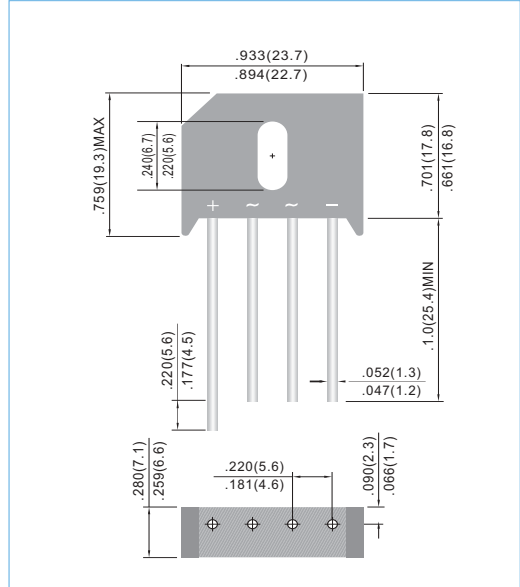

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.
 For Capacitive load derate current by 20%.

PARAMETER	SYMBOL	KBU8A	KBU8B	KBU8D	KBU8G	KBU8J	KBU8K	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	V
Maximum RMS Bridge Input Voltage	V _{RMS}	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	V
Maximum Average Forward T _c =100 °C Rectified Output Current at T _A =40 °C	I _{AV}	8.0						A
Pt Rating for fusing (t<8.3ms)	Pt	166						A ² sec
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	200						Apk
Maximum Forward Voltage Drop per Bridge Element at 6.0A	V _F	1.0						V _{pk}
Maximum Reverse Leakage Current at Rated @ T _A =25°C Dc Blocking Voltage @ T _A =100°C	I _R	10 1000						uA
Typical Thermal Resistance per leg (Note 2)	R _{θJA}	18.0						°C/W
Typical Thermal Resistance per leg (Note 3)	R _{θJC}	3.0						°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to + 150						°C

NOTES:

1. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw.
2. Units Mounted in free air, no heatsink, P.C.B at 0.375"(9.5mm) lead length with 0.5 x 0.5"(12 x 12mm)copper pads.
3. Units Mounted on a 2.0 x 1.6" x 0.3" thick (5 x 4 x 0.8cm) AL plate.



RATING AND CHARACTERISTIC CURVES

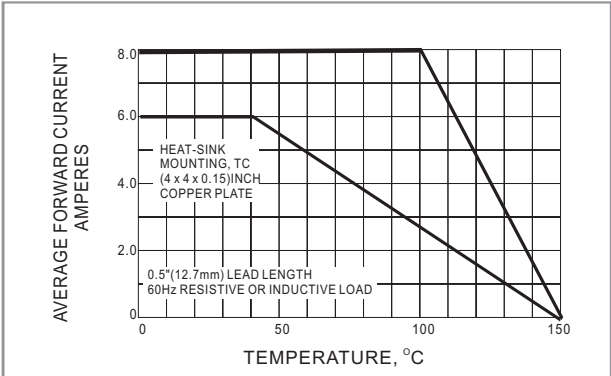


Fig.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

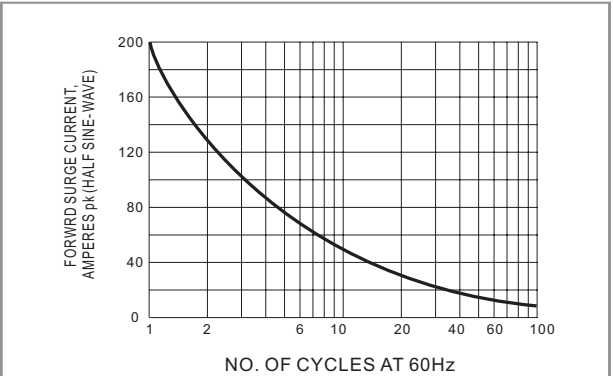


Fig.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

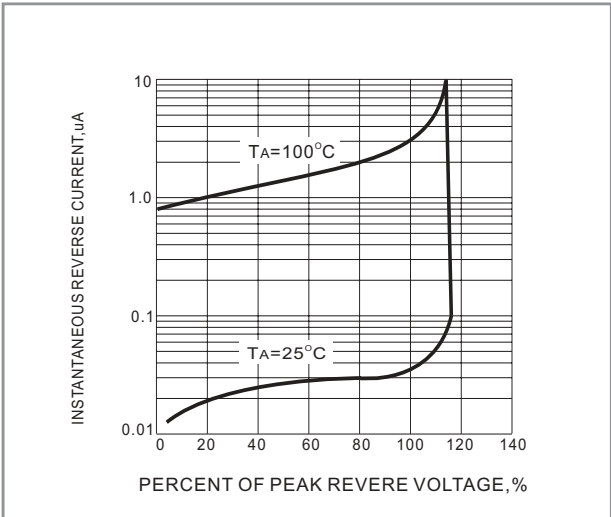


Fig.3 - TYPICAL REVERSE CHARACTERISTICS

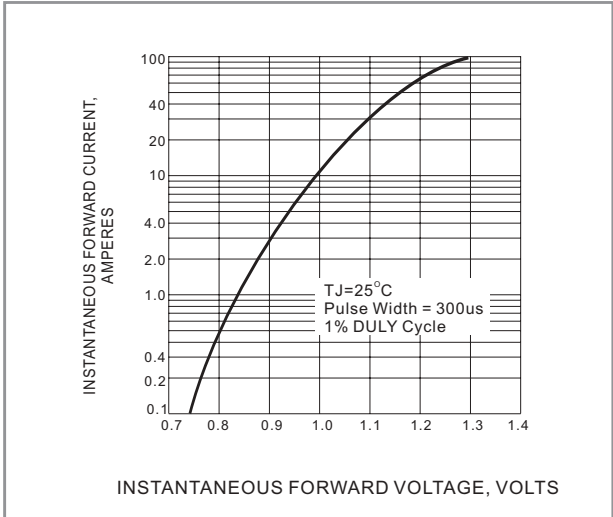


Fig.4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER ELEMENT

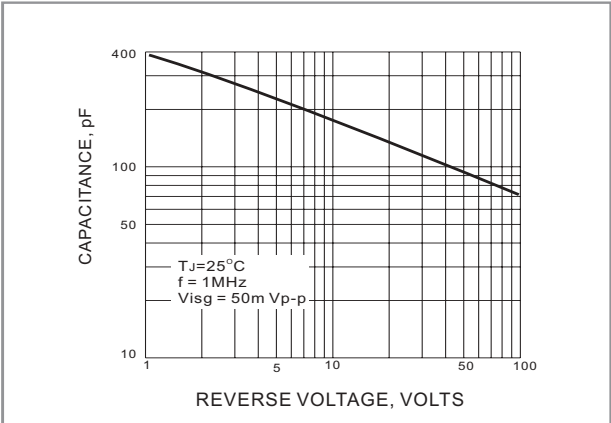


Fig.5 - TYPICAL JUNCTION CAPACITANCE