


● Features:

- * Non-contact switching.
- * For direct pc board or dual-in-line socket mounting.
- * Fast switching speed.
- * This product doesn't contain restriction substance, comply ROHS standard

● Package Dimensions

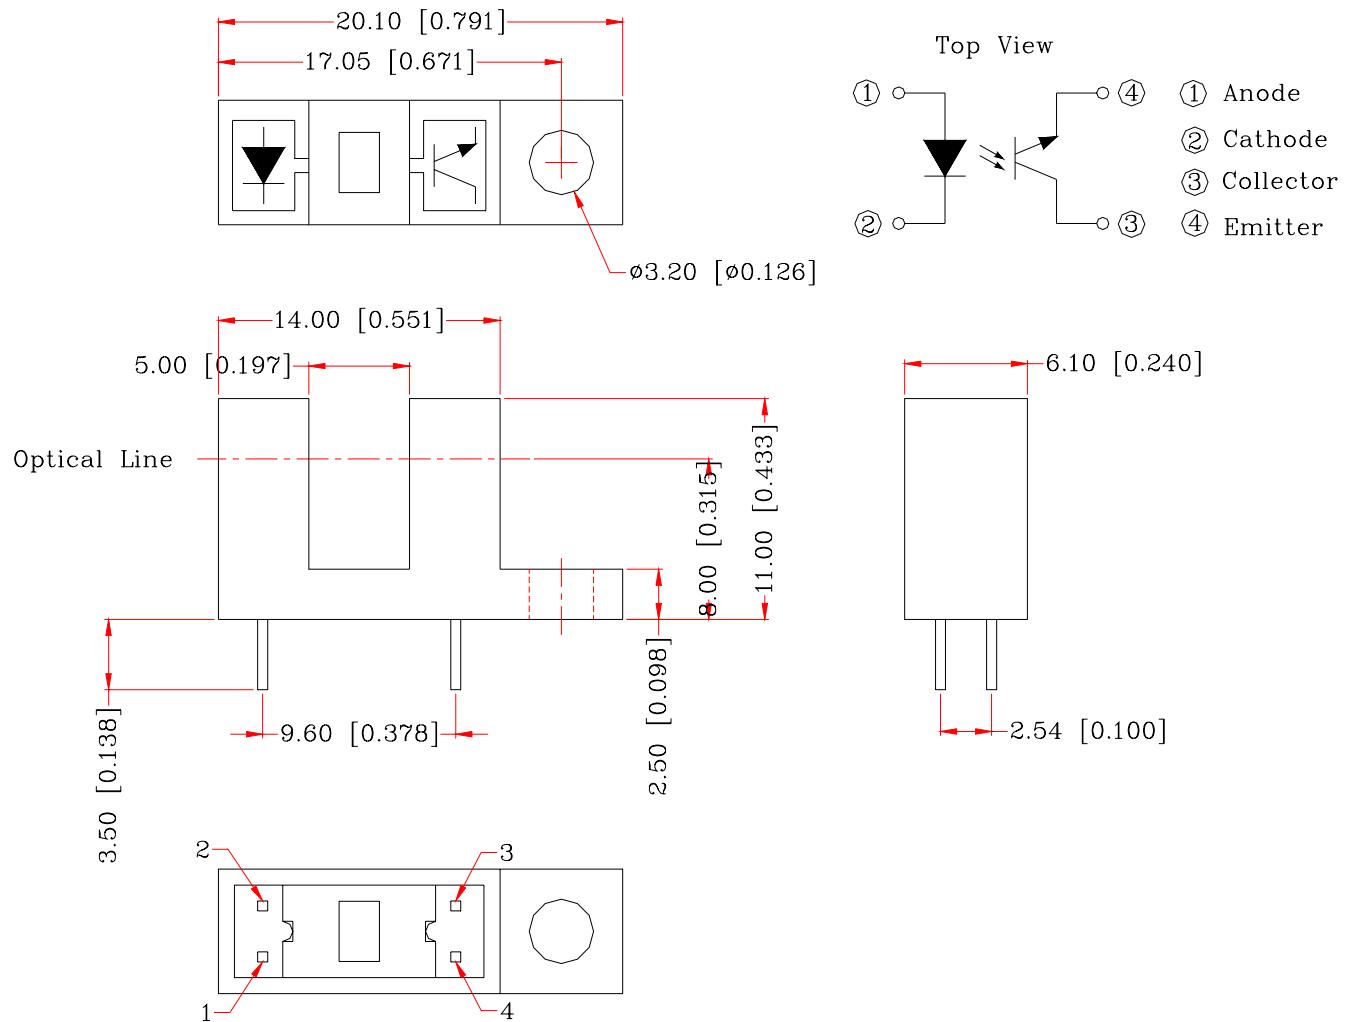

Notes:

1. All dimensions are in millimeters(inches).
2. Tolerance is $\pm 0.25\text{mm}$ unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

● **Absolute Maximum Rating (Ta=25°C)**

Item		Symbol	Rating	Unit
Input	Power Dissipation	Pd	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current (*1)	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	100	mW
	Collector Current	I _C	20	mA
	C-E Voltage	V _{CEO}	30	V
	E-C Voltage	V _{ECO}	5	V
Operating Temperature		To _{pr}	-25 ~ +85	°C
Storage Temperature		T _{stg}	-40 ~ +100	°C
Soldering Temperature (*2)		T _{sol}	260	°C

(*1) tw=100 uSec. , T=10 mSec.

(*2) t=5 Sec

● **Electrical Optical Characteristics (Ta=25°C)**

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V _F	I _F =20mA	—	1.2	1.5	V
	Reverse Current	I _R	V _R =5V	—	—	100	μA
	Peak Wavelength	λ p	I _F =20mA	—	940	—	nm
Output	Dark Current	I _D	V _{CE} =10V	—	2	200	nA
	C-E Saturation Voltage	V _{CE(sat)}	I _C =0.25mA I _F =210mA	—	—	0.4	V
Light Current		I _L	V _{CE} =5V I _F =10mA	0.5	—	5.0	mA
Speed	Rise Time	Tr	I _{FP} =20mA V _{CE} =5V R _L =1000Ω	—	20	—	μ sec
	Fall Time	Tf		—	20	—	μ sec

●Typical Electrical / Optical Characteristics Curves ($T_a=25^\circ\text{C}$)

Fig.1 Power Dissipation vs.
Ambient Temperature

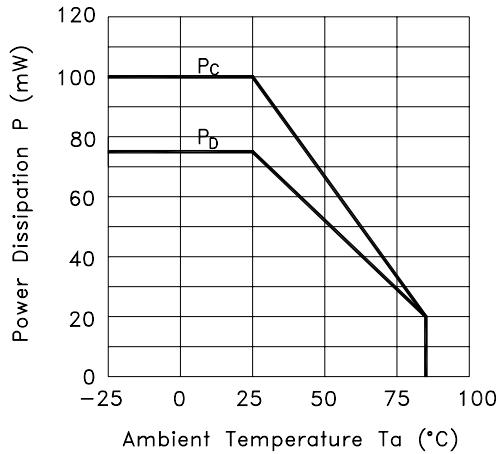


Fig.2 Forward Current vs.
Forward Voltage

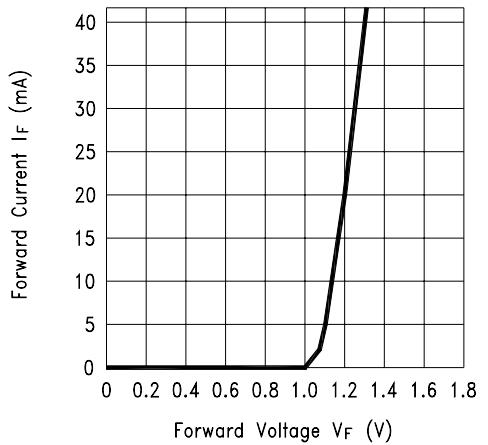


Fig.3 Collector Current vs.
Collector-emitter Voltage


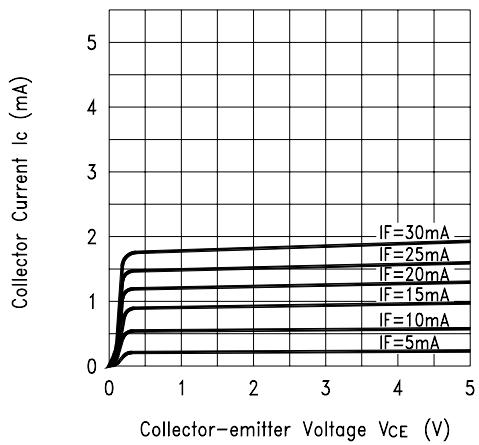


Fig.4 Collector Current vs.
Ambient Temperature

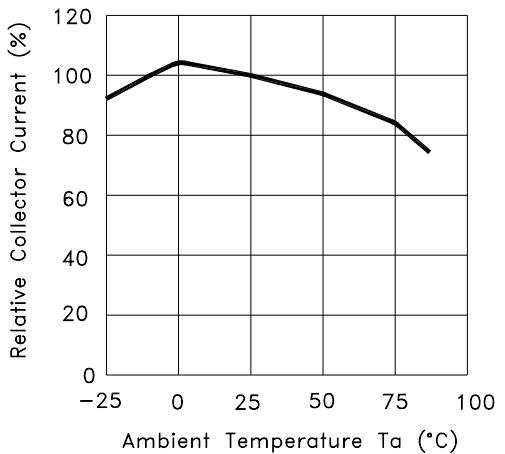

● Typical Electrical / Optical Characteristics Curves ($T_a=25^\circ\text{C}$)

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

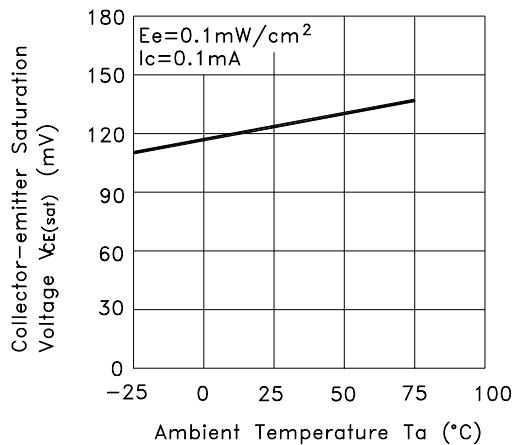


Fig.6 Response Time vs. Load Resistance




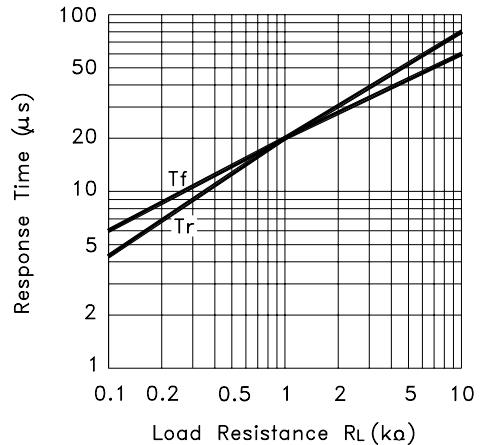



Fig.7 Sensing Position Characteristics (Typical)

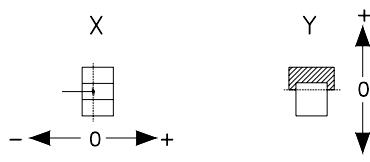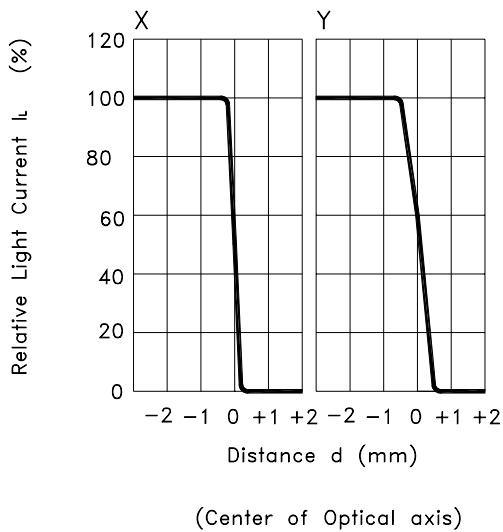


Test Circuit for Response Time

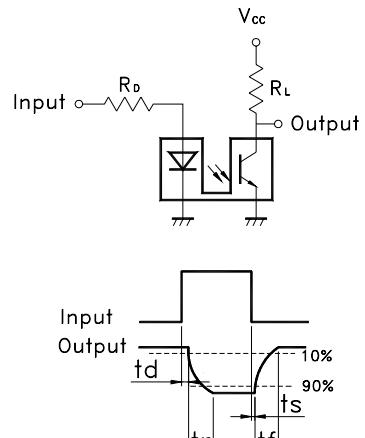

● Packaging Box Dimensions

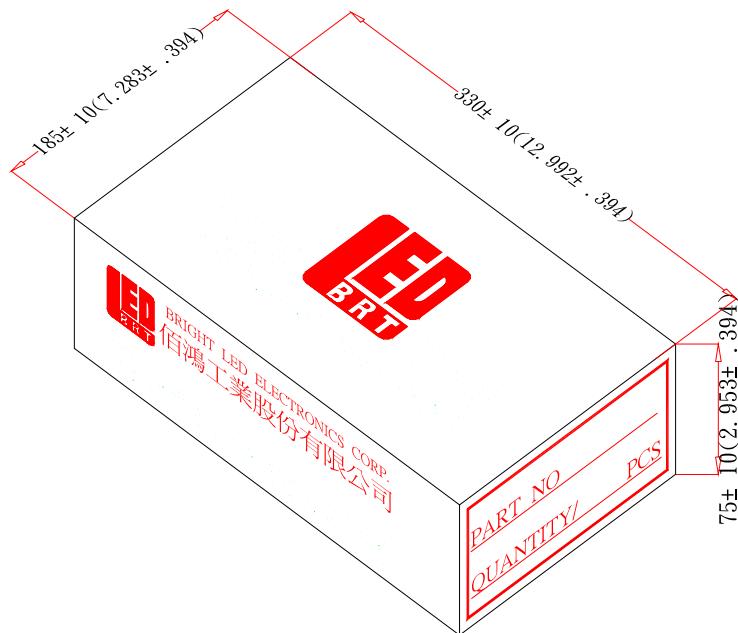

● Packaging Bag Dimensions

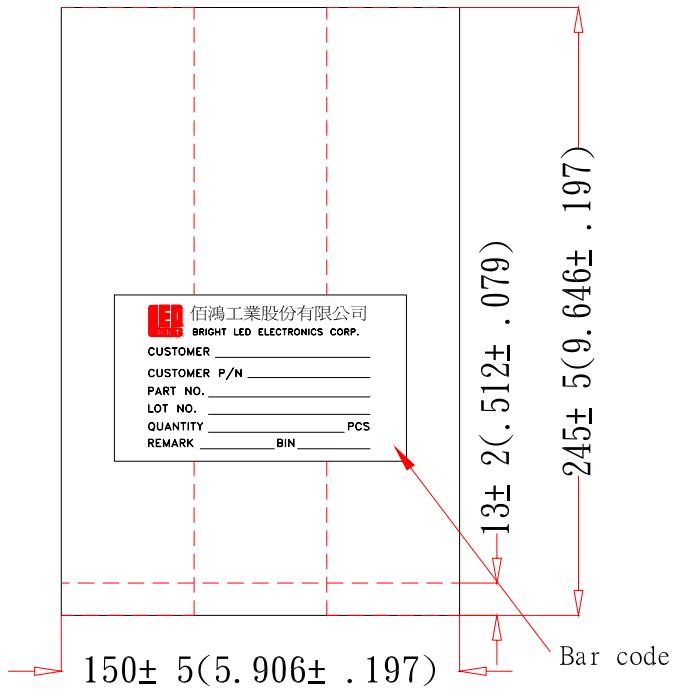

Notes:

1. 250pcs per bag, 1kpcs per box.
2. All Dimensions are in millimeters (inches).
3. Specifications are subject to change without notice.