


KMA Series

- 7mm height, 1000-hours-life at 105°C
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- Pb-free design




◆ SPECIFICATIONS

Items	Characteristics										
Category	-55 to +105°C										
Temperature Range	-55 to +105°C										
Rated Voltage Range	4 to 63V _{dc}										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V		
	tanδ (Max.)	0.35	0.22	0.19	0.16	0.14	0.12	0.10	0.08	(at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V		
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	2	2		
	Z(-40°C)/Z(+20°C)	10	6	5	3	3	3	3	3	(at 120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.										
	Rated voltage	4 to 16V _{dc}				25 to 63V _{dc}					
	Capacitance change	≤±25% of the initial value				≤±20% of the initial value					
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied.										
	Rated voltage	4 to 16V _{dc}				25 to 63V _{dc}					
	Capacitance change	≤±25% of the initial value				≤±20% of the initial value					
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									


◆ DIMENSIONS [mm]

- Terminal Code : E

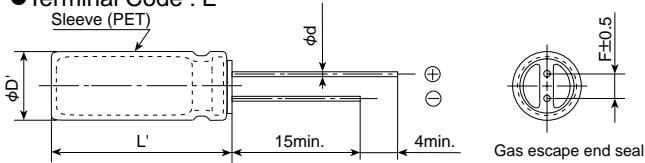

φD	4	5	6.3
φd	0.45	0.45	0.45
F	1.5	2.0	2.5
φD'	φD+0.5max.		
L'	L+1.0max.		

◆ PART NUMBERING SYSTEM

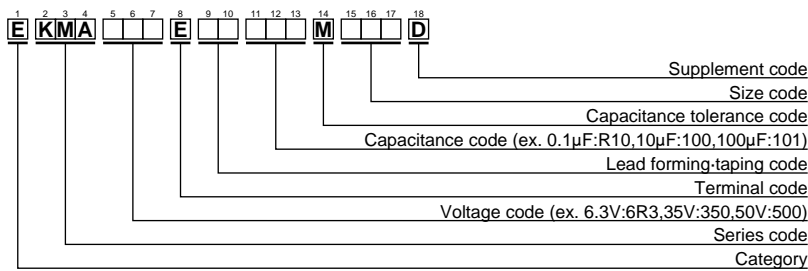

Please refer to "A guide to global code (radial lead type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
4	33	4X7	0.35	26	EKMA4R0E□□330MD07D	50	0.10	4X7	0.10	1.3	EKMA500E□□R10MD07D
	47	4X7	0.35	34	EKMA4R0E□□470MD07D		0.15	4X7	0.10	2.0	EKMA500E□□R15MD07D
	100	5X7	0.35	61	EKMA4R0E□□101ME07D		0.22	4X7	0.10	2.9	EKMA500E□□R22MD07D
	220	6.3X7	0.35	95	EKMA4R0E□□221MF07D		0.33	4X7	0.10	3.5	EKMA500E□□R33MD07D
6.3	22	4X7	0.22	31	EKMA6R3E□□220MD07D		0.47	4X7	0.10	5.0	EKMA500E□□R47MD07D
	47	5X7	0.22	47	EKMA6R3E□□470ME07D		0.68	4X7	0.10	7.1	EKMA500E□□R68MD07D
10	15	4X7	0.19	28	EKMA100E□□150MD07D		1.0	4X7	0.10	10	EKMA500E□□R10MD07D
	33	5X7	0.19	43	EKMA100E□□330ME07D		1.5	4X7	0.10	12	EKMA500E□□R15MD07D
	68	6.3X7	0.19	63	EKMA100E□□680MF07D		2.2	4X7	0.10	15	EKMA500E□□R22MD07D
	100	6.3X7	0.19	80	EKMA100E□□101MF07D		3.3	4X7	0.10	18	EKMA500E□□R33MD07D
16	6.8	4X7	0.16	20	EKMA160E□□6R8MD07D		4.7	5X7	0.10	23	EKMA500E□□R47ME07D
	10	4X7	0.16	25	EKMA160E□□100MD07D		6.8	6.3X7	0.10	28	EKMA500E□□R68MF07D
	15	5X7	0.16	31	EKMA160E□□150ME07D		10	6.3X7	0.10	34	EKMA500E□□100MF07D
	22	5X7	0.16	39	EKMA160E□□220ME07D		22	6.3X7	0.10	57	EKMA500E□□220MF07D
	47	6.3X7	0.16	59	EKMA160E□□470MF07D		63	0.1	4X7	0.08	1.3
100	6.3X7	0.16	97	EKMA160E□□101MF07D	0.15			4X7	0.08	1.9	EKMA630E□□R15MD07D
25	33	6.3X7	0.14	53	EKMA250E□□330MF07D	0.22		4X7	0.08	2.9	EKMA630E□□R22MD07D
	47	6.3X7	0.14	71	EKMA250E□□470MF07D	0.33		4X7	0.08	4.4	EKMA630E□□R33MD07D
35	4.7	4X7	0.12	20	EKMA350E□□4R7MD07D	0.47		4X7	0.08	7.9	EKMA630E□□R47MD07D
	6.8	5X7	0.12	24	EKMA350E□□6R8ME07D	0.68		4X7	0.08	9.2	EKMA630E□□R68MD07D
	10	5X7	0.12	30	EKMA350E□□100ME07D	1.0		4X7	0.08	11	EKMA630E□□R10MD07D
	15	6.3X7	0.12	37	EKMA350E□□150MF07D	1.5		4X7	0.08	13	EKMA630E□□R15MD07D
	22	6.3X7	0.12	47	EKMA350E□□220MF07D	2.2		4X7	0.08	17	EKMA630E□□R22MD07D
33	6.3X7	0.12	64	EKMA350E□□330MF07D	3.3	5X7		0.08	21	EKMA630E□□R33ME07D	
						4.7		6.3X7	0.08	26	EKMA630E□□R47MF07D
						10		6.3X7	0.08	43	EKMA630E□□100MF07D

□ □ : Lead forming / Taping code