

Fixed Frequency Synthesizer Surface Mount Module

Applications

- Fixed Wireless
- Synthesizers
-

Application Notes

- AN-107: Manual Soldering Technique
- AN-205: Measuring Phase Noise for SFS Series

Performance Specifications

	Min	Typ	Max	Units
Frequency	3000		3000	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-109		dBc/Hz
Harmonic Suppression (2nd)		-10		dBc
Spurious Suppression		-70		dBc
Power Output	4	6	8	dBm
Load Impedance		50		Ω
Settling Time		2		mS
Operating Temperature Range	0		70	$^{\circ}\text{C}$
Package Style		PLL-V12C		

Power Supply Requirements

	Min	Typ	Max	Units
Supply Voltage 1: PLL (Vcc, nom)		3		Vdc
Supply Voltage 2: VCO (Vcc, nom)		5		Vdc
Supply Current 1: PLL (Icc, typ)		11		mA
Supply Current 2: VCO (Icc, typ)		30		mA

Reference Oscillator Signal

	Min	Typ	Max	Units
Frequency		20		MHz
Phase Noise @1 kHz offset		-145		dBc/Hz



Additional Notes

Note1: Phase noise measurement was performed using a 20MHz reference oscillator with a phase noise of -145dBc/Hz @1KHz.
Pin 7,8,9 are no-connect

Phase Noise, typ.

Footprint

PHASE NOISE (1 Hz BW, typical)

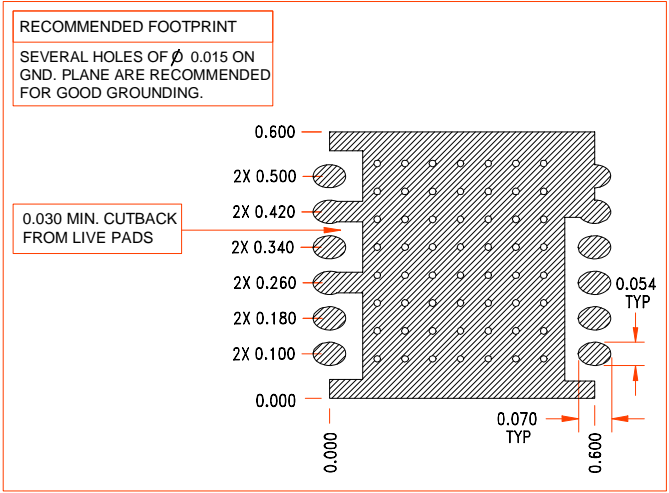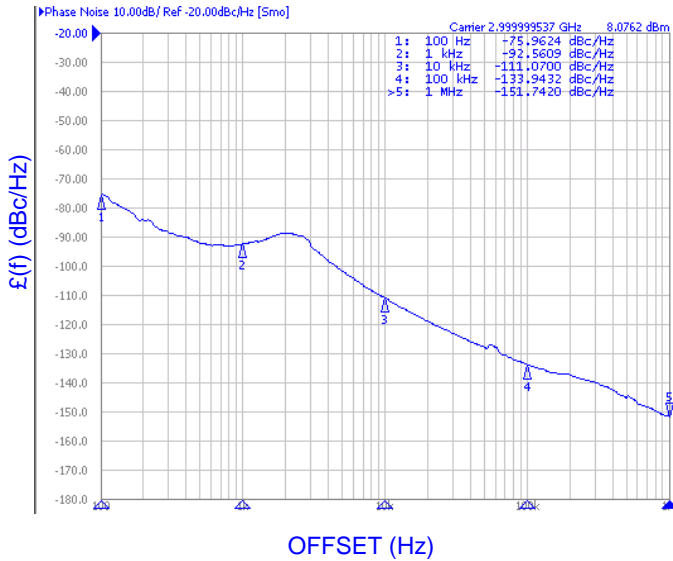

Physical Dimensions

