



1. CONFIGURATION & DIMENSIONS :

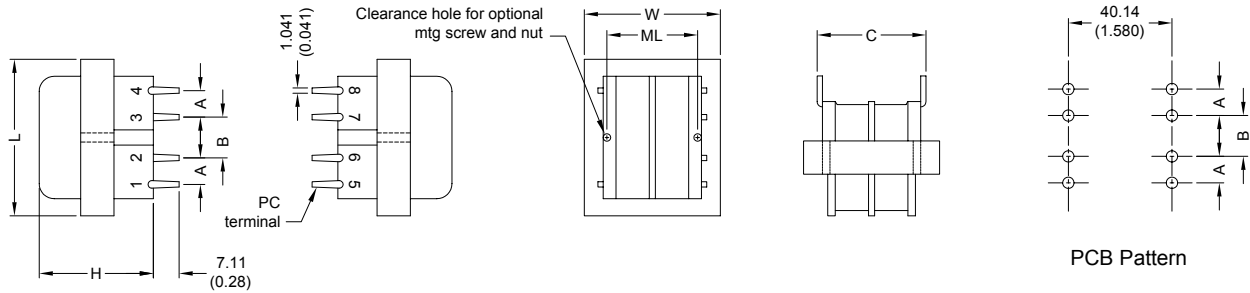

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
6	20	57.15 (2.250)	47.63 (1.875)	36.53 (1.438)	38.10 (1.500)	7.62 (.300)	10.16 (.400)	40.64 (1.600)	101.6-1016.0 x 34.93 (4-40 x 1.375)	386

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

a. Primary Voltage	AC 115/230 V 50/60 Hz .
b. No Load Primary Current	Less Than 20mA .
Input AC 115V 60Hz .	Less Than 20mA .
Input AC 230V 50Hz .	Series AC 21.40V .
c. Secondary Voltage (±5%)	Parallel AC 10.70V .
d. Secondary Load Current	Series 1.25A .
	Parallel 2.50A .
e. Full Load Primary Current	Less Than 145mA .
Input AC 115V 60Hz .	Less Than 270mA .
Input AC 230V 50Hz .	Series 16.00V .
f. Full Load Secondary Voltage (±5%)	Parallel 8.00V .
g. DC Resistance	Primary = 95 Ohm .
Pin 1-2	= 116 Ohm .
Pin 3-4	Secondary = 0.77 Ohm .
Pin 5-6	= 0.946 Ohm .
Pin 7-8	DC 500V 100Meg Ohm Of More .
h. Insulation Resistance	AC 2500V 60Hz 1 Minutes .
i. Withstand Voltage (Hi-Pot)	Less Than 60 Deg C .
j. Temperature Rise	EI-57 x 16.00 m/m .
k. Core Size	



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD