

SPECIFICATIONS

Electrical Ratings	Switch: 25mA @ 24VDC Carry: 100mA @ 24VDC
Electrical Life	2,000 cycles typical
Contact Resistance	< 25 mΩ initial
Actuation Force	600 gF max
Actuator Travel	0.90 mm
Dielectric Strength	500Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C



**.100" Pitch Low Profile
DIP Switch**


MATERIALS ←RoHS COMPLIANT

Actuator	Nylon, UL94V-0, White
Cover	Nylon, UL94V-0, Black
Housing	Nylon, UL94V-0, Black
Contacts	Beryllium Copper, Gold over Nickel Plated
Terminals	Brass, Gold over Nickel Plated

ORDERING INFORMATION



Series:	KT	08	R	T	H
KT					
Number of Positions:					
02 = 2 positions					
03 = 3 positions					
04 = 4 positions					
05 = 5 positions					
06 = 6 positions					
07 = 7 positions					
08 = 8 positions					
09 = 9 positions					
10 = 10 positions					
12 = 12 positions					
Actuator Height:					
E = Extended					
R = Recessed					
Tape Seal:					
Blank = No Tape Seal					
T = Tape Seal ** Not available with extended actuator					
Terminal Options:					
H = Straight					
S = Splayed					

DIMENSIONS


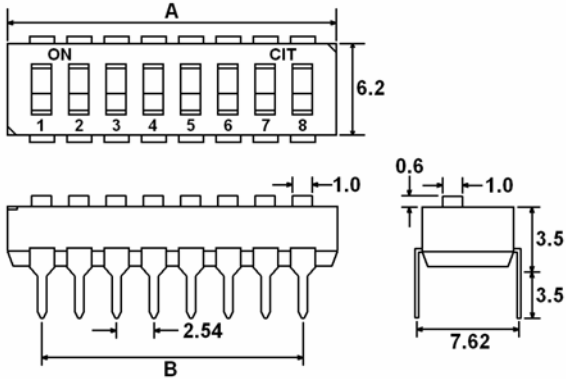


Number of Positions	"A" mm	"B" mm
02	6.02	2.54
03	8.56	5.08
04	11.10	7.62
05	13.64	10.16
06	16.18	12.70
07	18.72	15.24
08	21.26	17.78
09	23.80	20.32
10	26.34	22.86
12	31.42	27.94



SCHEMATIC & PC LAYOUT

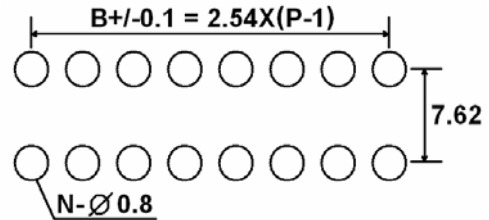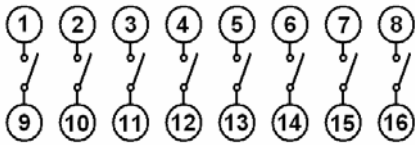

ACTUATOR OPTIONS

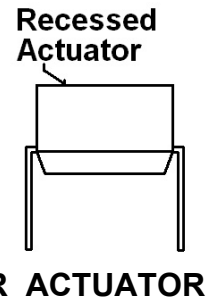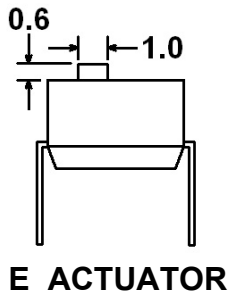

TERMINAL OPTIONS

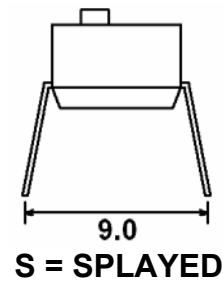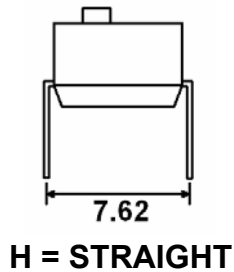

PACKAGING SPECIFICATIONS

All switches packaged in OFF position
Tube packaging standard