


Features

- $S_{21} = 17.7 \text{ dB @ } 1740 \text{ MHz}$
= $17.3 \text{ dB @ } 1790 \text{ MHz}$
- NF of 0.7 dB over Frequency
- Unconditionally Stable
- Single 5V Supply
- High OIP3 @ Low Current

Description

The plerow™ ALN-series is the compactly designed surface-mount module for the use of the LNA with or without the following gain blocks in the infrastructure equipment of the mobile wireless (CDMA, GSM, PCS, PHS, WCDMA, DMB, WLAN, WiBro, WiMAX), GPS, satellite communication terminals, CATV and so on. It has an exceptional performance of low noise figure, high gain, high OIP3, and low bias current. The stability factor is always kept more than unity over the application band in order to ensure its unconditionally stable implementation to the application system environment. The surface-mount module package including the completed matching circuit and other components necessary just in case allows very simple and convenient implementation onto the system board in mass production level.



1-stage Single Type

Specifications (in Production)

Typ. @ T = 25°C, $V_s = 5 \text{ V}$, Freq. = 1765 MHz, $Z_{o,sys} = 50 \text{ ohm}$

Parameter	Unit	Specifications		
		Min	Typ	Max
Frequency Range	MHz	1740		1790
Gain	dB	16.5	17.5	
Gain Flatness	dB		± 0.2	± 0.3
Noise Figure (NF)	dB		0.7	0.75
Output IP3 ⁽¹⁾	dBm	30	31	
S11 / S22 ⁽²⁾	dB			-18 / -10
Output P1dB	dBm	17	18	
Switching Time	μsec			
Supply Current	mA		60	80
Supply Voltage	V		5	
Impedance	Ω		50	
Max. RF Input Power	dBm	C.W 29 ~ 31 (before fail)		
Package Type & Size	mm	Surface Mount Type, 10Wx10Lx3.8H		

More Information

Website: www.asb.co.kr
E-mail: sales@asb.co.kr

Tel: (82) 42-528-7223
Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town Bldg., 367-17 Goijeong-Dong, Seo-Gu, Daejeon 302-716, Korea


Operating temperature is -40°C to +85°C.

1) OIP3 is measured with two tones at an output power of 4 dBm / tone separated by 1 MHz.

2) S11/S22 (max) is the worst value within the frequency band.

3) Switching time means the time that takes for output power to get stabilized to its final level after switching DC voltage from 0 V to V_s .

Outline Drawing (Unit: mm)

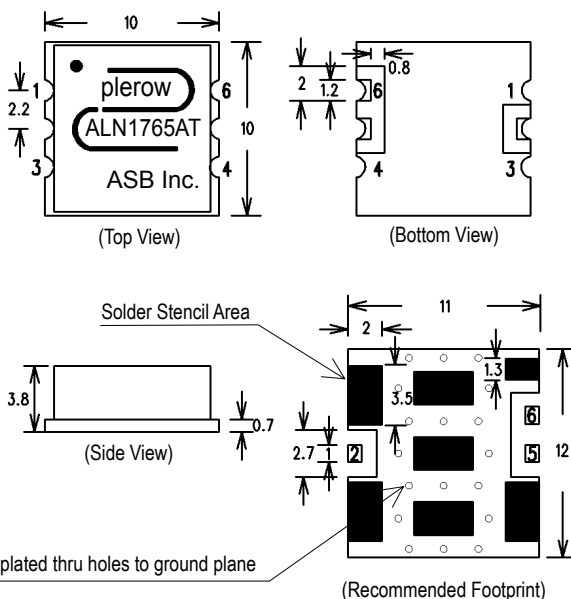

Pin Number	Function
2	RF In
5	RF Out
6	V_s
Others	Ground

Note: 1. The number and size of ground via holes in a circuit board is critical for thermal RF grounding considerations.


2. We recommend that the ground via holes be placed on the bottom of all ground pins for better RF and thermal performance, as shown in the drawing at the left side.

**Typical Performance
(Measured)**


1740~1790

+5 V


S-parameters

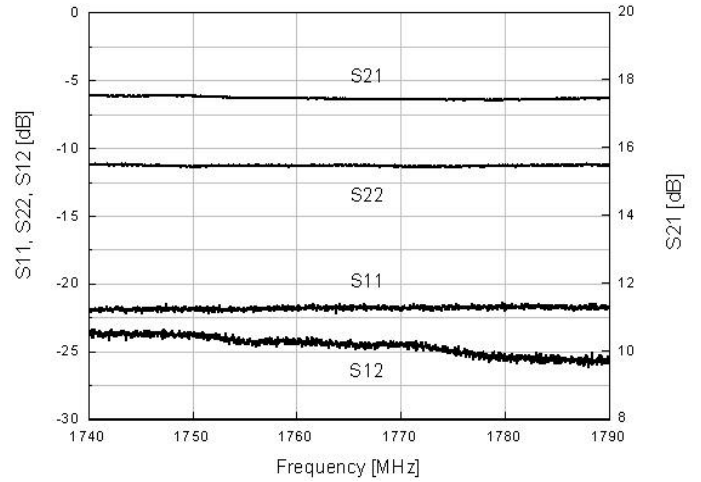


S-parameters & K Factor

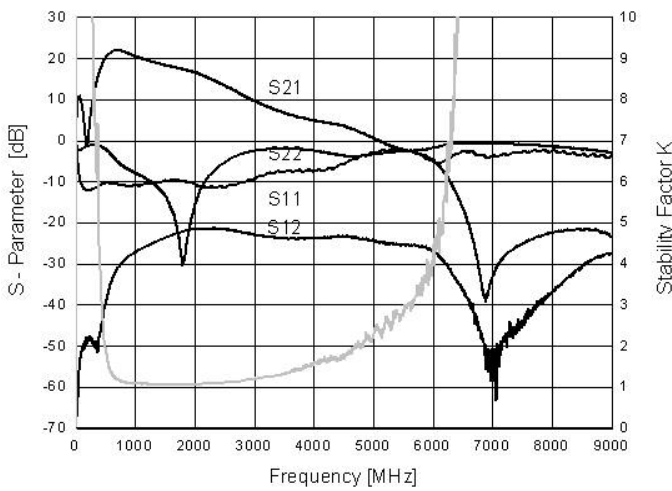


Noise Figure

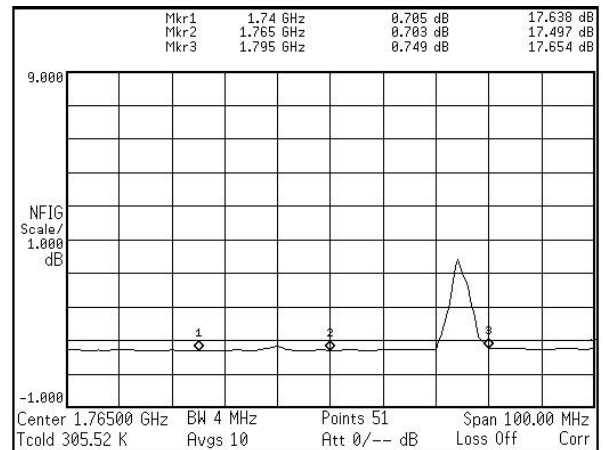

OIP3

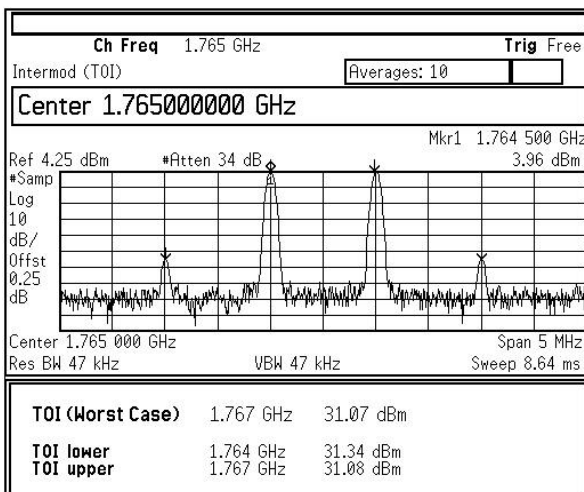

P1dB

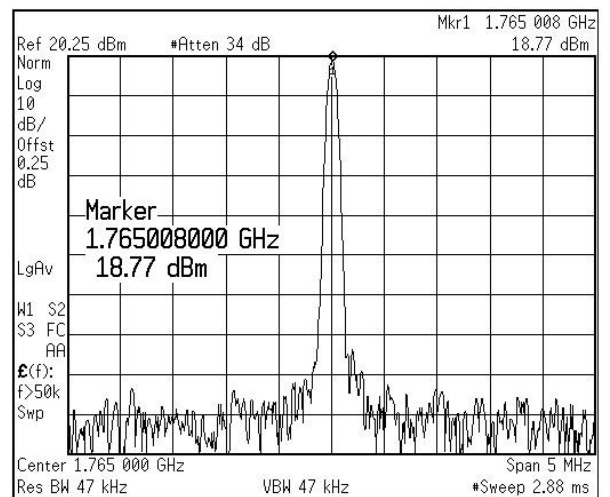

RF Performance with Voltage Change

1. S-parameter

	1739 MHz			1755 MHz				1770 MHz		
	S21 (dB)	S11 (dB)	S22 (dB)	S21 (dB)	G/F (dB)	S11 (dB)	S22 (dB)	S21 (dB)	S11 (dB)	S22 (dB)
4.50 V	17.44	-19.68	-10.45	17.34	0.21	-20.59	-10.50	17.23	-21.92	-10.45
4.75 V	17.50	-21.11	-10.78	17.39	0.22	-22.12	-10.85	17.28	-23.56	-10.83
5.00 V	17.52	-21.70	-10.42	17.40	0.22	-22.70	-10.49	17.30	-24.22	-10.45
5.25 V	17.53	-21.59	-10.26	17.39	0.22	-22.80	-10.32	17.31	-24.56	-10.31
5.50 V	17.55	-22.47	-10.20	17.39	0.23	-23.80	-10.29	17.32	-25.67	-10.28

2. OIP3, P1dB & NF

	1739 MHz			1755 MHz			1770 MHz		
	OIP3 (dBm)	P1dB (dBm)	NF (dB)	OIP3 (dBm)	P1dB (dBm)	NF (dB)	OIP3 (dBm)	P1dB (dBm)	NF (dB)
4.50 V	33.19	17.88	0.687	33.07	17.92	0.668	33.13	17.85	0.715
4.75 V	32.12	18.32	0.684	31.85	18.35	0.693	32.41	18.32	0.710
5.00 V	31.37	18.76	0.705	31.07	18.77	0.703	31.58	18.73	0.749
5.25 V	30.78	19.11	0.723	30.48	19.11	0.729	30.77	19.09	0.745
5.50 V	30.15	19.44	0.730	29.86	19.47	0.743	30.00	19.43	0.750

Note: tested at room temperature.

RF Performance with Operating Temperature

1. S-parameter


	1739 MHz			1755 MHz				1770 MHz		
	S21 (dB)	S11 (dB)	S22 (dB)	S21 (dB)	G/F (dB)	S11 (dB)	S22 (dB)	S21 (dB)	S11 (dB)	S22 (dB)
-45 °C	18.86	-21.56	-12.29	18.78	0.30	-22.80	-12.12	18.56	-21.94	-12.29
-10 °C	18.67	-21.38	-12.61	18.54	0.30	-22.13	-12.72	18.37	-21.40	-12.68
25 °C	18.45	-21.71	-12.42	18.30	0.31	-22.72	-12.28	18.14	-21.53	-12.50
60 °C	18.26	-21.31	-12.25	18.15	0.31	-21.86	-12.24	18.95	-21.13	-12.49
85 °C	18.10	-21.20	-12.00	17.99	0.32	-21.19	-11.95	17.78	-21.12	-12.06

2. OIP3, P1dB & NF

	1739 MHz			1755 MHz			1770 MHz		
	OIP3 (dBm)	P1dB (dBm)	NF (dB)	OIP3 (dBm)	P1dB (dBm)	NF (dB)	OIP3 (dBm)	P1dB (dBm)	NF (dB)
-45 °C	31.44	19.21	0.460	31.58	18.99	0.494	31.45	19.05	0.470
-10 °C	32.14	18.99	0.577	32.47	18.88	0.570	32.45	18.95	0.586
25 °C	31.91	18.85	0.717	32.11	18.67	0.731	32.14	18.84	0.713
60 °C	31.76	18.25	0.908	31.98	18.30	0.898	32.04	18.44	0.922
85 °C	31.64	17.62	1.031	31.89	17.76	1.035	31.93	17.96	1.054


Note: tested at $V_s = 5V$.

Application Circuit

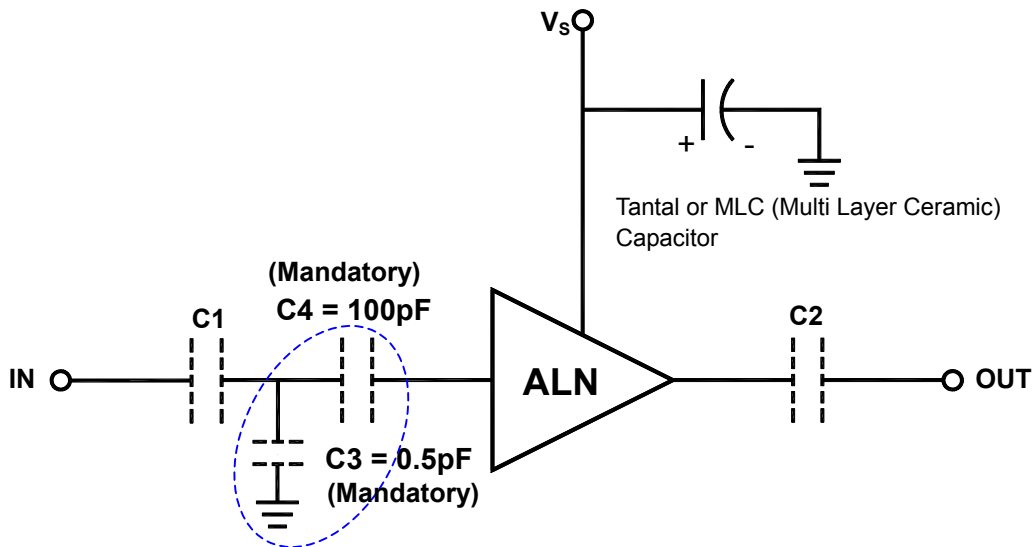


- 1) The tantal or MLC (Multi Layer Ceramic) capacitor is optional and for bypassing the AC noise introduced from the DC supply. The capacitance value may be determined by customer's DC supply status. The capacitor should be placed as close as possible to V_s pin and be connected directly to the ground plane for the best electrical performance.
- 2) DC blocking capacitors are always necessarily placed at the input and output port for allowing only the RF signal to pass and blocking the DC component in the signal. The DC blocking capacitors are included inside the ALN module. Therefore, C1 & C2 capacitors may not be necessary, but can be added just in case that the customer wants. The value of C1 & C2 is determined by considering the application frequency. C3 and C4 in the blue dot line circle shall be used for matching.

Recommended Soldering Reflow Process

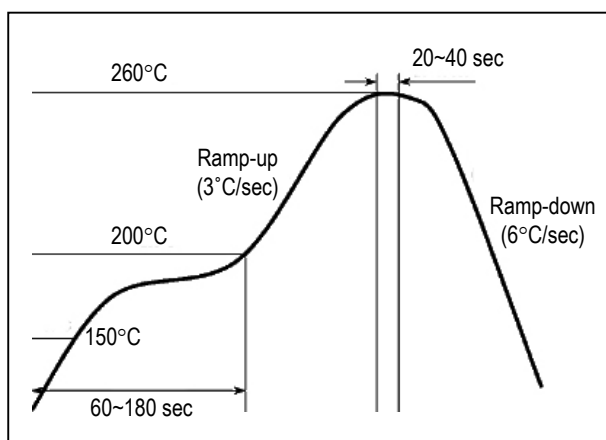

Evaluation Board Layout

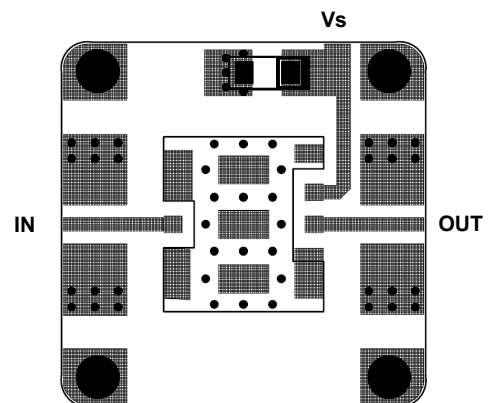

Size 25x25mm
(for ALN-AT, BT, T Series – 10x10mm)