

FEATURES

- OUTPUT CURRENT UP TO 16A
- SMALL SIZE AND LOW PROFILE :
1.30" X 0.53" X 0.30" (SMD) ; 2.00" X 0.50" X 0.28" (SIP)
- HIGH EFFICIENCY - 95% @ 3.3V FULL LOAD
- INPUT RANGE FROM 2.4VDC TO 5.5VDC
- FIXED SWITCHING FREQUENCY (300KHZ)
- SMD & SIP PACKAGES
- OUTPUT VOLTAGE PROGRAMMABLE FROM 0.75VDC TO 3.3VDC VIA EXTERNAL RESISTOR
- INPUT UNDER-VOLTAGE LOCKOUT
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Distributed Power Architectures
Semiconductor Equipment
Microprocessor Power Applications

OPTIONS

Positive Logic Remote on/off


DESCRIPTION

DOS16-05T (SMD type), DOH16-05T (for Vertical Mounting SIP type) and DOH16-05TA (for Horizontal Mounting SIP type) are non-isolated DC/DC converters that can deliver up to 16A of output current with full load efficiency of 95% at 3.3V output.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS	
Output current	16A max
Voltage accuracy	Full load and Vin(nom) ± 2%Vo(set)
Minimum load	0%
Line regulation	$V_{in}=V_{o(set)}+0.5V$ to $V_{in(max)}$ at Full Load ± 0.3%Vo(set),typ
Load regulation	No Load to Full Load ± 0.4%Vo(set),typ
Ripple and noise (Note2)	20MHz bandwidth 15mVrms,max 50mVp-p,max
Temperature coefficient	±0.4%, typ
Dynamic load response (Note 2)	$\Delta I_o / \Delta t = 2.5A/\mu S$, Vin(nom) Peak deviation 300mV,typ Load change step (50% to 100% or 100% to 50% of Io(max)) Setting time (Vo<10%peak deviation) 25µS,typ
	$\Delta I_o / \Delta t = 2.5A/\mu S$, Vin(nom) Peak deviation 150mV,typ Load change step (50% to 100% or 100% to 50% of Io(max)) Setting time (Vo<10%peak deviation) 100µS,typ
Output current limit	180%,typ
Output short-circuit current	Hiccup, automatics recovery
External load capacitance	ESR ≥ 1mΩ 1000µF,max
	ESR ≥ 10mΩ 5000µF,max
Output voltage overshoot-startup	Vin=2.4~5.5V, F.L. 1%Vo(set)
Voltage adjustability (see fig.1)	(Note 4) 0.7525V ~ 3.63V
GENERAL SPECIFICATIONS	
Efficiency	See table
Isolation voltage	None
Switching frequency	300KHz, typ
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1
Dimensions	SMD 1.30 X 0.53 X 0.30 Inch (33.0 X 13.5 X 7.7 mm)
	SIP 2.00 X 0.50 X 0.28 Inch (50.8 X 12.7 X 7.2 mm)
Weight	6.0g(0.22oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332 1.428 x 10 ⁷ hrs
	MIL-HDBK-217F 6.523 x 10 ⁵ hrs

INPUT SPECIFICATIONS	
Input voltage range	Vo(set) < Vin - 0.5V 2.4 - 5.5VDC
Maximum input current	Vin=2.4 to 5.5V; Io=Io(max) 16A
Input filter (Note 5)	C filter
Input no load current (Vin=5V, Io=0, module enabled)	Vo(set) =0.75Vdc 100mA,typ
	Vo(set) =3.3Vdc 130mA,typ
Input under voltage lockout	Start-up voltage 2.2V,typ
	Shutdown voltage 2.0V,typ
Input reflected ripple current	5~20MHz, 1µH source impedance 100mA p-p
ENVIRONMENTAL SPECIFICATIONS	
Operating ambient temperature	-40°C ~ +85°C(with derating)
Storage temperature range	-55°C ~ +125°C
Thermal shock	MIL-STD-810F
Over temperature protection	125°C,typ
FEATURE SPECIFICATIONS	
Remote ON/OFF(Note 6)	
Negative logic(standard)	ON = 0V < Vr < 0.3V IIN=10µA,max
	OFF =1.5V < Vr < Vin(max) IIN=1mA,max
Positive logic(option)	ON = Vin(max) IIN=10µA,max
	OFF=0V < Vr < 0.3V IIN=1mA,max
Input current of Remote control pin	10µA~1.0mA
Remote off state input current	Nominal Vin 1.5mA,typ
Remote sense range	0.5V,max
Rise time	Time for Vo to rise from 10% to 90%of Vo(set) 6ms,max.
Turn-on delay time	Case 1 (Note 7) 1ms,typ
	Case 2 (Note 8) 1ms,typ

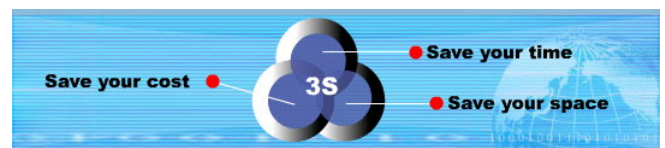



Model Name	ON/OFF Logic	Package	Input Voltage	Output Voltage	Output Current		Efficiency (%) 5.0Vin, 3.3Vdc@16A
					Min. Load	Max. Load	
DOS16-05T	Negative	SMD	2.4 ~ 5.5Vdc Vin(min)=Vo(set)+0.5V	0.75 ~ 3.3Vdc	0A	16A	95%
DOS16-05T-P	Positive						
DOH16-05T	Negative	Vertical Mounting					
DOH16-05T-P	Positive	SIP					
DOH16-05TA	Negative	Horizontal Mounting					
DOH16-05TA-P	Positive	SIP					

Note

- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C. MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
- External with C_{out} = 1µF ceramic//10µF tantalum capacitors.
- External with C_{out} = 2x150µF polymer capacitors.
- Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as R_{trim} in Table 1) between the TRIM and GND pins of the module. To calculate the value of the resistor **R_{trim}** for a particular output voltage **V_o**, use the following equation:

$$R_{trim} = \left[\frac{21070}{V_o - 0.7525} - 5110 \right] \Omega$$

- It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C_{in} is 4x150µF low-ESR polymer capacitors // 4x47µF ceramic capacitors at least.
- Device code with suffix “-P” – Positive logic(On/Off is open collector/drain logic input; Signal referenced to GND)
Device code with no suffix – Negative logic (On/Off pin is open collector/drain logic input with external pull –up resistor; signal referenced to GND)
- Case 1 :On/Off input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min) until Vo=10% of Vo(set))
- Case 2 :Input power is applied for at least one second and then the On/Off input is set to logic low (delay form instant at which Von/off=0.3V until Vo=10% of Vo(set))

CAUTION: This power module is not internally fused. An input line fuse must always be used.




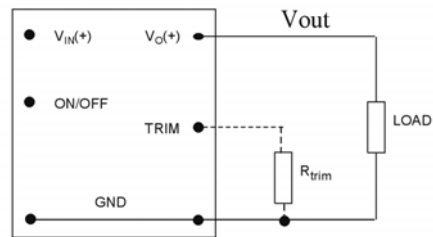



Fig. 1

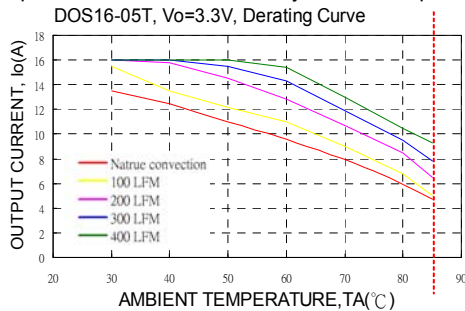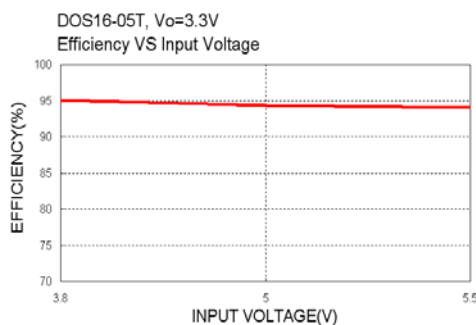


Vo(set) (V)	Rtrim (KΩ)
0.7525	Open
1.2	41.973
1.5	23.077
1.8	15.004
2.5	6.974
3.3	3.160

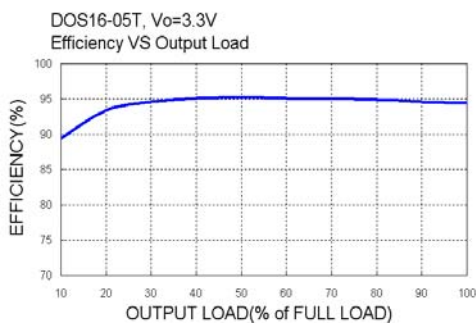


DOH16-05T

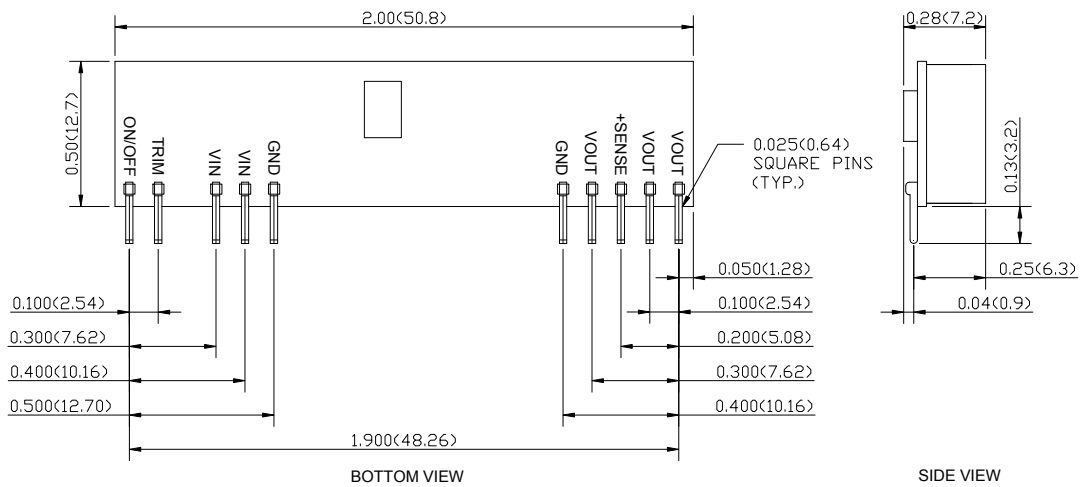

DOH16-05TA

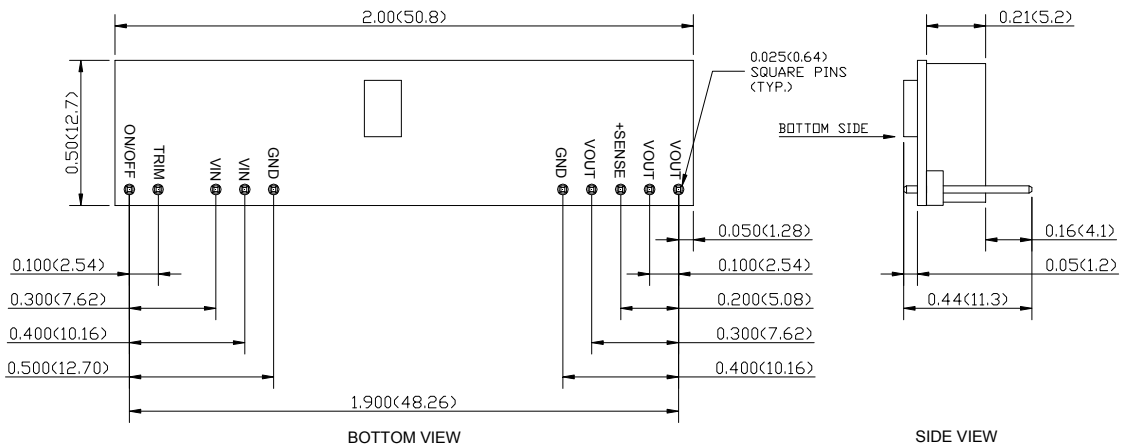

DOS16-05T

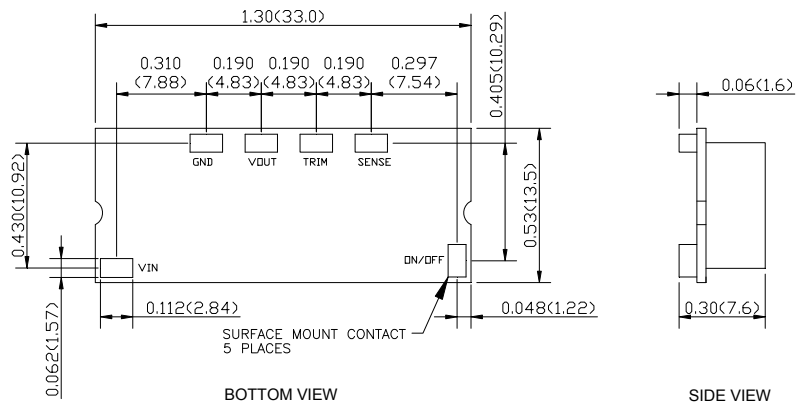

1. All dimensions in Inches (mm)
 Tolerance: X.XX±0.02 (X.X±0.5)
 X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)