

Hybrid Couplers 3 dB, 90°

Applications

- Microstrip Circuits
- Divider/Combiners
- Switch Networks
- Balanced Detectors
- Antenna Feeds



Features

- Welded Tab Mount
- 2-Way Power Split
- Reliable Performance
- Handles 500 Watts


Electrical Specifications

Frequency MHz	Isolation dB Min/Typ	Insert. Loss dB Max	VSWR Max : 1
100 - 160	20/27	0.30	1.20/1.10
Amp. Bal. dB Max	Phase Bal. Degrees Max	Power Ave. CW Watts	
±0.30	±2.0	500	

Notes: Electrical specifications apply only with properly designed test fixtures. Testing is done at ambient temperature only. Sample testing is performed to MIL-STD-105, Level 2, AQL 1.0. Test includes coupling, amplitude balance, insertion loss and isolation. If your application requires additional testing, consult Anaren Power rating applies when solder tab/coupler interface has been conformally coated. Impedance: 50 ohms. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications.

Electrical and Mechanical Specifications subject to change without notice.

Outline Drawing

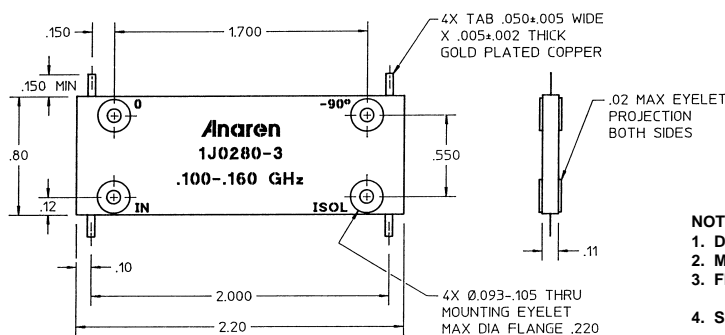

- NOTES:
1 MARKING AS SHOWN PER MIL-STD-130
2 CASESTYLE 116

- NOTES:
1. DIMENSIONS ARE IN INCHES OVER (MILLIMETERS)
2. MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130
3. FINISH: CHEMICAL CONVERSION COAT (CLEAR) PER MIL-C-5541, CLASS 1A
4.1 MATERIAL: FLAT WIRE, COPPER-061, PER ASTM-B-272 4.2 FINISH: GOLD PLATE PER MIL-G-45204, TYPE 3, GRADE A, CLASS 00. OVER NICKEL SULFAMATE FLASH PER QQ-N-290, CLASS I.